



PRODUCT DOCUMENT PACK

Prepared and distributed by KW Commercial Kitchen

PRODUCT

Scotsman ECM 227 AS OX Ice Maker – 160kg Gourmet Ice, 70kg Storage, R290

Model / SKU: ECM 227 AS OX

KW COMMERCIAL KITCHEN

7/72 Canterbury Road, Bankstown NSW 2200

Phone 1300 001 366

Email sales@kwcommercial.com.au

Web www.kwcommercial.com.au



Scan for the current KW product page

DOCUMENT NOTICE

The supplier document begins on the next page. KW contact branding is added in a separate footer area and does not replace the supplier's instructions, specifications or warranty terms.

Official supplier source: https://moffat.global.ssl.fastly.net/sites/default/files/products/specification/ECM_227_AS_OX_AU.pdf

EC Series Self Contained Gourmet Ice Machines – with Progressive Water Discharge – up to 160kg

ECM 227 AS OX Medium gourmet cube 20g, Ø30mm x 34mm



Medium gourmet cube
20g, 30mm dia x H 34mm







Note: Ice production rate is measured with the water temperature at 10°C and an ambient temperature of 21°C.

- Up to 160kg daily production rate
- 70kg storage bin capacity
- Air cooled version
- Produces individual transparent Gourmet crystal clear supercubes
- Hydrocarbons R290 refrigerant gas
- XSafe - Natural Sanitation System
- PWD-Progressive water discharge: pumps excess residual water up to a distance up to 15 meters
- Simple, reliable electromechanic controls
- Horizontal ice evaporator spray-system technology
- Resistant stainless steel exterior
- Front access condenser air filter, removable and washable
- Routine maintenance visible alarm light on front panel
- Ergonomically designed ice storage access with disappearing door and door closing movement dampening system
- Includes ice scoop, water and drain hose




XSafe EcoX

EC Series Self Contained Gourmet Ice Machines – with
Progressive Water Discharge – up to 160kg
ECM 227 AS OX



- UNIT OF MEASUREMENT: mm
- 1. 3/4" OD - OVERFLOW DRAIN
 - 2. 3/4" GAS - WATER INLET
 - 3. 3/4" GAS - WATER OUTLET
WATER COOLED UNIT ONLY
 - 4. 3/4" GAS WATER INLET
WATER COOLED UNIT ONLY
 - 5. CORDSET

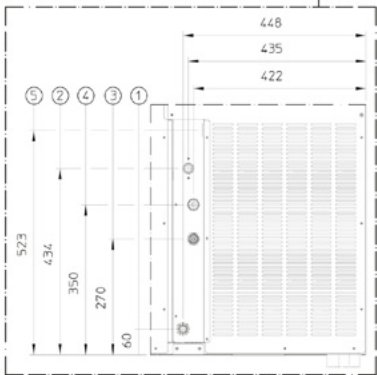

moffat.com.au

Australia
Moffat Pty Limited
Victoria/Tasmania
740 Springvale Road
Mulgrave, Victoria 3170
Telephone 03-9518 3888
Facsimile 03-9518 3833
vsales@moffat.com.au

New South Wales
Telephone 02-8833 4111
nswsales@moffat.com.au

South Australia
Telephone 03-9518 3888
vsales@moffat.com.au

Queensland
Telephone 07-3630 8600
qldsales@moffat.com.au

Western Australia
Telephone 08-9413 2400
wasales@moffat.com.au

Ice production kg per 24 hours
Ambient temperature / Water temperature

10°C / 10°C	21°C / 10°C	32°C / 21°C
165	160	130

Dimensions

Width: 1078mm
Depth: 719mm
Height: 1082mm (including legs)
Nett weight: 98kg
Packed weight: 112kg

Water consumption

Air cooled version: 21 litres per hour

Electrical rating

Air cooled version: 230-240V, 1P+N+E, 50Hz, 1400W,
10A cordset supplied
No. Circuit wire: 3
Compressor: 1400W*
Energy consumption: 28kW/24hr*

* Based on 32°C ambient / 21°C water temperature conditions

Refrigerant type
R290

Installation distance from wall

Rear 150mm
Sides 150mm

Operating requirement air temperature 10-43°C

Water connection requirements

Inlet connection: R 3/4"
Cold water: 5-38°C
Pressure: 100-500kPa
Water outlet connection: Ø3/4"

Operating requirements

	Minimum	Maximum
Air temperature	10	43
Water temperature	5	38
Water pressure	1 bar / 14psi / 100kPa	5 bar / 70psi / 500kPa

Important Notice:
Models and specifications are
subject to change without notice.
This spec sheet is meant for
commercial purpose only. For
technical documentation please
refer to our service manuals.



© Copyright Moffat Ltd
AU.SM.2501

an Ali Group Company



The Spirit of Excellence