



## PRODUCT DOCUMENT PACK

Prepared and distributed by KW Commercial Kitchen

### PRODUCT

## Hoshizaki FTC-90DEA-GN-3D Underbench Drawer Freezer – 160L

**Model / SKU: FTC-90DEA-GN-3D**

### KW COMMERCIAL KITCHEN

7/72 Canterbury Road, Bankstown NSW 2200

Phone 1300 001 366

Email [sales@kwcommercial.com.au](mailto:sales@kwcommercial.com.au)

Web [www.kwcommercial.com.au](http://www.kwcommercial.com.au)





Scan for the current KW product page

### DOCUMENT NOTICE





The supplier document begins on the next page. KW contact branding is added in a separate footer area and does not replace the supplier's instructions, specifications or warranty terms.

Official supplier source: [/media/products/71757/documents/hoshizaki-ftc-90dea-gn-3d-spec-sheet-8b855f3ef75f\\_\\_kw.pdf](/media/products/71757/documents/hoshizaki-ftc-90dea-gn-3d-spec-sheet-8b855f3ef75f__kw.pdf)

HOSHIZAKI

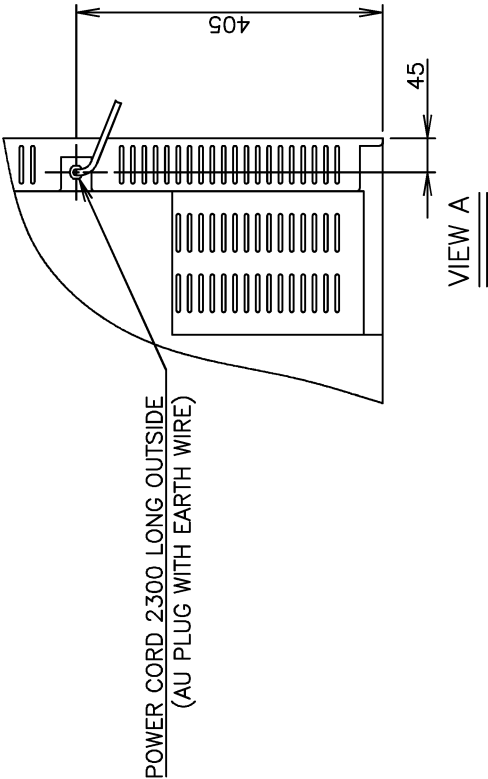

AU PLUG

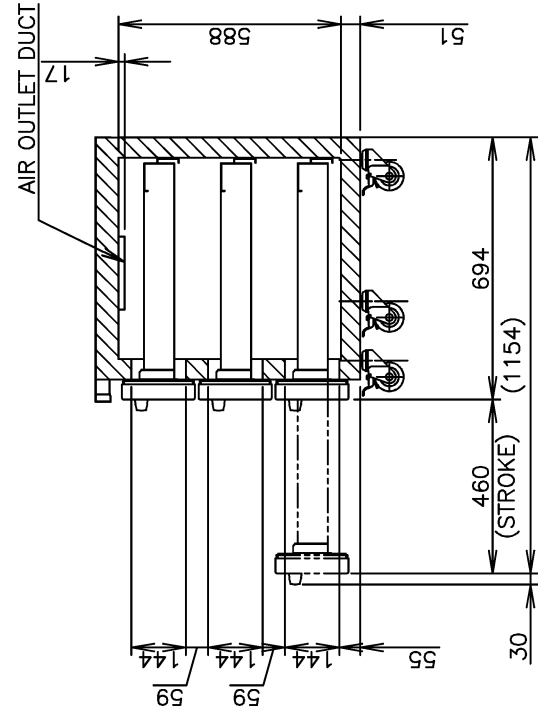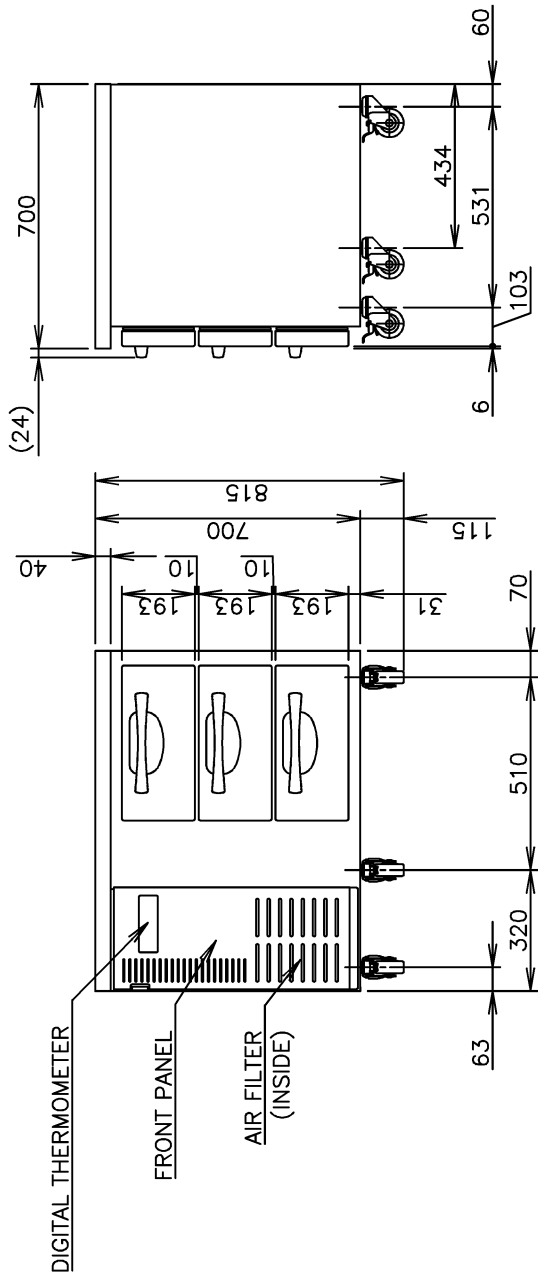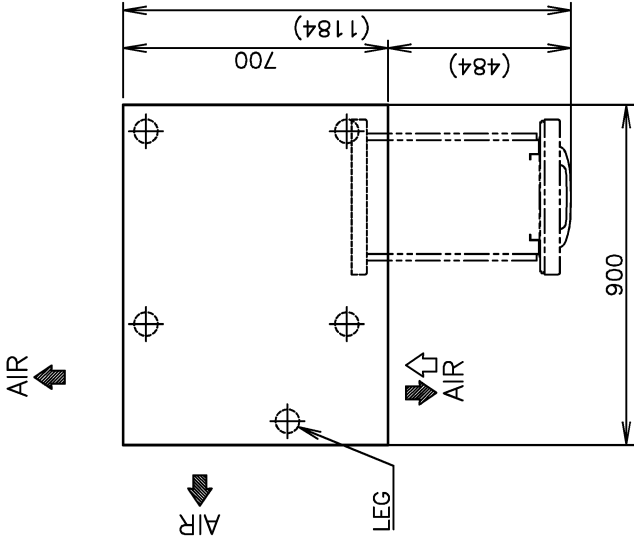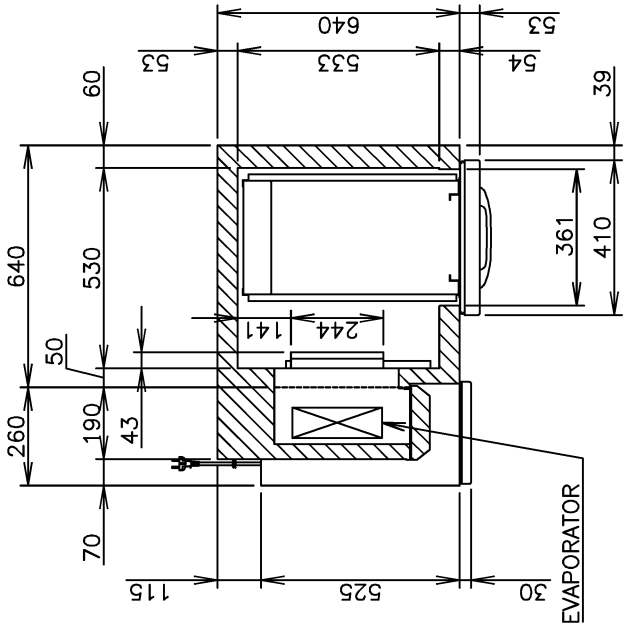

|                                |                                                                            |
|--------------------------------|----------------------------------------------------------------------------|
| ITEM                           | Hoshizaki Drawer Type Undercounter Freezer                                 |
| MODEL                          | FTC-90EDA-GN-3D                                                            |
| POWER SUPPLY                   | 1 Phase 220-240V 50Hz Capacity: 0.78kVA (3.6A)                             |
| AMPERAGE                       | Rated: 3.0A                                                                |
| ELECTRIC CONSUMPTION           | Motor: *W(Power Factor: *) Heater: 362W<br>Refrigeration: *W Defrost: 362W |
| HEAT REJECTION                 | *W                                                                         |
| POWER CORD                     | 2.3m (Plug with Earth Wire)                                                |
| EFFECTIVE CAPACITY             | 160L                                                                       |
| OUTSIDE DIMENSIONS             | 900mm (W) x 700mm (D) x 815mm (H)                                          |
| INSIDE DIMENSIONS              | 530mm (W) x 533mm (D) x 588mm (H)                                          |
| EXTERIOR                       | Stainless Steel, Galvanized Steel (Rear / Bottom)                          |
| INTERIOR                       | Stainless Steel, ABS Plastic                                               |
| INSULATION                     | Polyurethane Foam                                                          |
| INSULATION FOAM BLOWING AGENT  | Cyclopentane                                                               |
| REFRIGERATION SYSTEM           | Forced Air Circulation                                                     |
| DEFROST SYSTEM                 | Glass Tube Heater                                                          |
| COMPRESSOR                     | Hermetic 315W                                                              |
| CONDENSER                      | Fin and Tube type, Air-cooled                                              |
| EVAPORATOR                     | Fin and Tube Type                                                          |
| REFRIGERANT                    | R404A/200g                                                                 |
| TEMPERATURE CONTROL            | Microprocessor (Digital Temp Indication) Adjustable from -25 to -7°C       |
| DEFROST CONTROL                | Microprocessor Controlled                                                  |
| ELECTRIC CIRCUIT PROTECTION    | Fuse, Earth Wire                                                           |
| REFRIGERANT CIRCUIT PROTECTION | Motor Protector                                                            |
| LEG                            | Urethane (76mm DIA, 115mm HIGH)                                            |
| WEIGHT                         | 86kg (Gross Approx. *kg)                                                   |
| PACKAGE                        | Carton 965mm (W) x 780mm (D) x 950mm (H)                                   |
| OPERATING CONDITIONS           | Ambient Temperature: 5-43°C<br>Voltage Range: Rated Voltage±6%             |

- \*We reserve the right to make changes in specifications and design without prior notice.
1. Install the product properly in accordance with the instructions on location, electrical connections stated in the instruction manual provided.  
Allow 10mm extra space at the installation site to meet any installation requirements (additional spacing is also required for proper air flow and pipe connections).
  2. The heat rejection is based on the reached pull-down temperature at ambient temperature of 32°C and power supply of 230V 50Hz.  
The amperage and electric consumption are based on measurements at ambient temperature of 32°C and power supply of 230V 50Hz.
  3. The cabinet temperature range of -25 to -7°C is guaranteed at ambient temperature of 30°C.
  4. Product code: T018-C814(For HL)

HOSHIZAKI DRAWER TYPE UNDERCOUNTER FREEZER FTC-90DEA-GN-3D

|                      |                 |                 |                    |                       |              |
|----------------------|-----------------|-----------------|--------------------|-----------------------|--------------|
| APPROVED<br>KAWAKAMI | CHECKED<br>WANG | DESIGNED<br>LIU | DRAWN<br>ZHANG     | SCALE<br>1/20         | TRIGONOMETRY |
| *<br>*               | *<br>*          | *****<br>DATE   | DATE<br>2019.02.15 | DRAWING NO.<br>D24515 | SYMBOL<br>△  |
| APPROVED             | DESIGNED        | SYMBOL          | DATE               |                       |              |