



## PRODUCT DOCUMENT PACK

Prepared and distributed by KW Commercial Kitchen

### PRODUCT

**B+S NC-2-SW-2 Noodle Cooker with Soup Warmer insert (2 rounds baskets + 2 rec pots)**

**Model / SKU: NC-2-SW-2**

#### KW COMMERCIAL KITCHEN

7/72 Canterbury Road, Bankstown NSW 2200

Phone 1300 001 366

Email [sales@kwcommercial.com.au](mailto:sales@kwcommercial.com.au)

Web [www.kwcommercial.com.au](http://www.kwcommercial.com.au)



Scan for the current KW product page

### DOCUMENT NOTICE

The supplier document begins on the next page. KW contact branding is added in a separate footer area and does not replace the supplier's instructions, specifications or warranty terms.

Official supplier source: [https://bscommercialkitchens.com/wp-content/uploads/2024/07/MY2024\\_Specification-Sheet-NC-2-SW-2.pdf](https://bscommercialkitchens.com/wp-content/uploads/2024/07/MY2024_Specification-Sheet-NC-2-SW-2.pdf)



## B&S BLACK SERIES: NC-2-SW-2

### Two Basket Noodle Cooker with Two Soup Warmer Pots

Project: \_\_\_\_\_ Item: \_\_\_\_\_



NC-2-SW-2




#### Standard Features:

- AISI Grade Stainless Steel
- AISI 316 Marine grade stainless steel tank – 1.5mm Thick
- Efficient multi-jet target burner
- In-built water overflow helps remove water impurities
- Water temperature is thermostatically controlled
- 30L water capacity
- Flame Failure - Included as standard
- Piezo ignition to pilot multi-jet target burner
- Noodle baskets and 8L soup warmer pots provided
- Front access to all components makes service easy
- Pan Dimensions: 455mm D x 300mm W x 120mm H  
(Height is measured from the base plate to water level mark)

#### Options:

- Natural or LPG Gas
- Non-swivel rear castors – Set of two

#### Specifications:

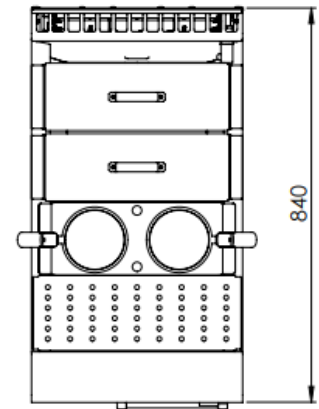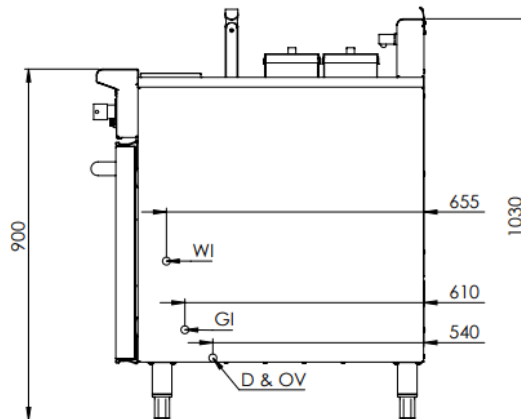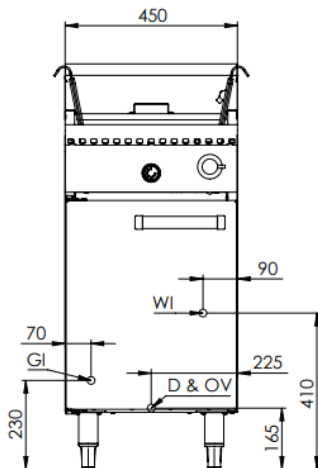

| MODEL     | LENGTH<br>(mm) | DEPTH<br>(mm) | HEIGHT<br>(mm) | NET WEIGHT<br>(kg) | GAS CONSUMPTION (Mj/h) |     |
|-----------|----------------|---------------|----------------|--------------------|------------------------|-----|
|           |                |               |                |                    | NG                     | LPG |
| NC-2-SW-2 | 450            | 840           | 1030           | -                  | 70                     | 75  |

#### Connections:

| GAS (GI)<br>(BSP) | WATER<br>(WI) | DRAIN (D)<br>OVERFLOW (OV) | SUPPLY PRESSURE (kPa) |     |
|-------------------|---------------|----------------------------|-----------------------|-----|
|                   |               |                            | NG                    | LPG |
| 3/4" (F)          | 1/2" (Copper) | D & OV = 1" BSP (M)        | 1.0                   | 2.6 |

- Combination control valve with inbuilt regulator is supplied within the unit
- **Must** be installed by an authorised installer in accordance to **AS/NZS5601 refer to current version**

Due to ongoing Product Development, Product Improvement and Research, B+S Commercial Kitchens reserves the right to alter specification without notice.

Approval Number: GMK 10682



B+S Commercial Kitchens  
57 Plateau Road Reservoir VIC 3073 Australia | +61 3 9469 4754  
info@bscommercialkitchens.com | www.bscommercialkitchens.com

