



PRODUCT DOCUMENT PACK

Prepared and distributed by KW Commercial Kitchen

PRODUCT

Washtech GM-R - Professional Compact Undercounter Polish-free Compatible Glasswash

Model / SKU: GM-R

KW COMMERCIAL KITCHEN

7/72 Canterbury Road, Bankstown NSW 2200

Phone 1300 001 366

Email sales@kwcommercial.com.au

Web www.kwcommercial.com.au



Scan for the current KW product page

DOCUMENT NOTICE

The supplier document begins on the next page. KW contact branding is added in a separate footer area and does not replace the supplier's instructions, specifications or warranty terms.

Official supplier source: https://moffat.global.ssl.fastly.net/sites/default/files/products/specification/GM-R_au.pdf

GM-R

COMPACT UNDERCOUNTER
POLISH-FREE COMPATIBLE GLASSWASHER

WASHTECH®



STANDARD FEATURES

- 1, 2 and 3 minute cycles
 - Wash capacity of up to 960 glasses per hour
 - Polish-free glasswashing compatible (add BA14-DW14)
 - Compatible with 365mm to 450mm racks
 - Touchscreen controls providing advanced customisation
 - 0.3HP soft start wash pump
 - Dual chemical pumps
 - Assured rinse c/w break tank and booster pump
 - Hands-free drainage system with sump and drain pump
 - Stainless steel wash and drain filter basket
 - Adjustable tilting rack slide
 - Independent wash and rinse arms
 - Updatable power for rapid rinse recovery (1p/25A option)
 - Heavy-duty stainless steel construction
-
- 1x 450mm dish rack (600 70081)
 - 1x 450mm cup rack (600 70080)
 - 1x cutlery container (C660503)
 - 1x quick connection kit (all hoses and 1p/15A plugset)

SPECIFICATIONS


A - Hot Water	
Temperature	65°C*
Connection	3/4" male, hose supplied
Pressure	100-350kPa
Flow	10L per minute
Backflow prevention	Atmospheric vacuum breaker
Consumption	2.4L per cycle

D - Drainage	
Drain pump flexi-hose	25mm

C - Electrical	V	Hz	A/ph	Max kW
Single phase	230-240	50	15	2.75
Single phase	230-240	50	25	5.25
Three phase	400-415	50	15	7.50

Isolating switch must be within 1m of, and not directly behind, the machine
Refer to operator manual for installation instructions

In line with policy to continually develop and improve its products,
Washtech reserves the right to change specifications and design without
notice.

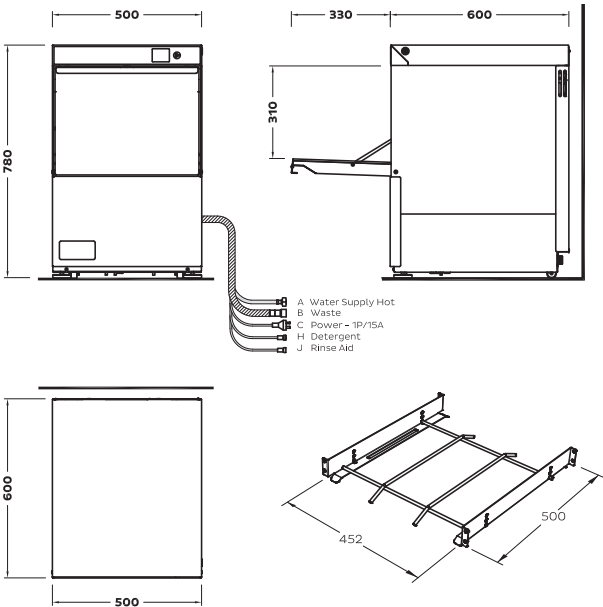

	Machine	Packed
Dimensions		
Width (mm)	500	560
Depth (mm)	600	650
Height (mm)	780	915
Weight (kg)	47	57
Volume (m3)		0.33
Water Quality	Min	Max
pH	7	8
TDS	1	135
Cl-		100
SO4		400
Fe		0.1
Mn		0.5
Cu		0.05
Cl2		0.1

*Suitable for connection to cold water supply. To minimise recovery time
between cycles it is recommended that a 1p/25A or 3/15A power supply is
used in conjunction with cold inlet water.



an Ali Group Company



the spirit of excellence