



PRODUCT DOCUMENT PACK

Prepared and distributed by KW Commercial Kitchen

PRODUCT

Washtech UD-R - Professional Undercounter Dishwasher / Polish-Free Compatible Glassware

Model / SKU: UD-R

KW COMMERCIAL KITCHEN

7/72 Canterbury Road, Bankstown NSW 2200

Phone 1300 001 366

Email sales@kwcommercial.com.au

Web www.kwcommercial.com.au



Scan for the current KW product page

DOCUMENT NOTICE

The supplier document begins on the next page. KW contact branding is added in a separate footer area and does not replace the supplier's instructions, specifications or warranty terms.

Official supplier source: https://moffat.global.ssl.fastly.net/sites/default/files/products/specification/UD-R_au.pdf

UD-R

UNDERCOUNTER DISHWASHER /
POLISH-FREE COMPATIBLE GLASSWASHER

WASHTECH®



STANDARD FEATURES

- 1, 2 and 3 minute cycles
 - Polish-free glasswashing compatible (add BA14-DW14)
 - Capacity of up to 1,080 plates or 1,500 glasses per hour
 - Compatible with 365mm to 500mm racks
 - Touchscreen controls providing advanced customisation
 - 0.5HP soft start wash pump
 - Dual chemical pumps
 - Assured rinse c/w break tank and booster pump
 - Hands-free drainage system with sump and drain pump
 - Heavy-duty stainless steel scrap tray and waste basket
 - Adjustable tilting rack slide
 - Independent stainless steel wash and rinse arms
 - Updatable power for rapid rinse recovery (1p/25A option)
 - Heavy-duty stainless steel construction
-
- 1x 500mm dish rack (600 70028)
 - 1x 500mm cup rack (600 70029)
 - 1x cutlery container (C660503)
 - 1x quick connection kit (all hoses and 1p/15A plugset)

SPECIFICATIONS


A - Hot Water	
Temperature	65°C*
Connection	3/4" male, hose supplied
Pressure	100-500kPa
Flow	10L per minute
Backflow prevention	Atmospheric vacuum breaker
Consumption	2.4L per cycle

D - Drainage	
Drain pump flexi-hose	25mm

C - Electrical	V	Hz	A/ph	Max kW
Single phase	230-240	50	15	2.87
Single phase	230-240	50	25	5.37
Three phase	400-415	50	15	7.50

Isolating switch must be within 1m of, and not directly behind, the machine
Refer to operator manual for installation instructions

In line with policy to continually develop and improve its products,
Washtech reserves the right to change specifications and design without
notice.

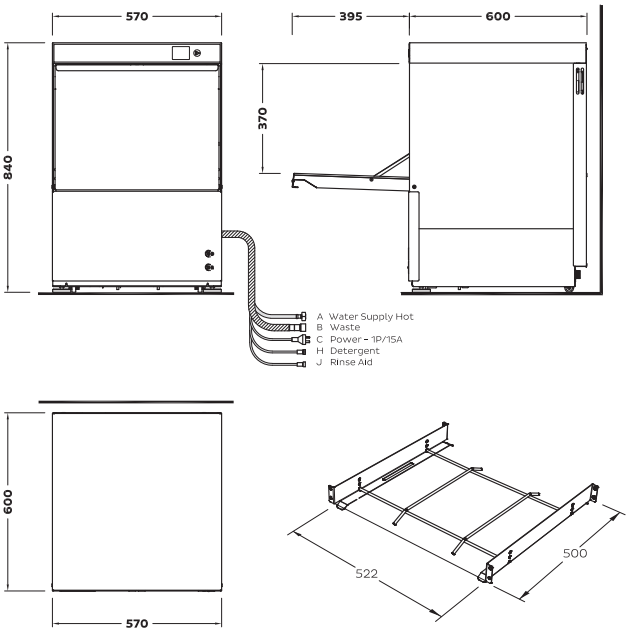

Dimensions	Machine	Packed
	Width (mm)	620
Machine	Depth (mm)	675
	Height (mm)	940
Machine	Weight (kg)	78
	Volume (m3)	0.39
Water Quality	Min	Max
	pH	7
Water Quality	TDS	1
	Cl-	100
Water Quality	SO4	400
	Fe	0.1
Water Quality	Mn	0.5
	Cu	0.05
Water Quality	Cl2	0.1

*Suitable for connection to cold water supply. To minimise recovery time between cycles it is recommended that a 1p/25A or 3/15A power supply is used in conjunction with cold inlet water.



an Ali Group Company



the spirit of excellence