



PRODUCT DOCUMENT PACK

Prepared and distributed by KW Commercial Kitchen

PRODUCT

Woodson WR.CFSQB24 Two-Row Square Cold Food Display – 2 Rows, 4 Bays

Model / SKU: WR.CFSQB24

KW COMMERCIAL KITCHEN

7/72 Canterbury Road, Bankstown NSW 2200

Phone 1300 001 366

Email sales@kwcommercial.com.au

Web www.kwcommercial.com.au



Scan for the current KW product page

DOCUMENT NOTICE

The supplier document begins on the next page. KW contact branding is added in a separate footer area and does not replace the supplier's instructions, specifications or warranty terms.

Official supplier source: /media/products/81842/documents/spec_sheet-1.pdf

Product Information

- Square glass profile with sleek black modern finish
- Double glazed toughened glass front, sides and top for improved performance and safety
- Specially designed blown air well for increased cooling performance
- Adjustable digital controller designed to hold temperature accurately between 0°C and 8°C
- Rear toughened glass doors with soft close rollers
- Top mounted LED lights for illuminated interior
- Insulated tank with double skin stainless steel construction
- Undermount, self contained refrigeration system with burn off tray
- Designed to operate at ambient temperatures up to 32°C
- Environmentally friendly natural refrigerant
- Condenser air filter
- Up to 25% reduced energy consumption compared with traditional cold food bars
- Fold down tray race fitted as standard
- 1/1 GN sized well, fits pans up to 100mm deep.
Supplied with 8 x 1/2 GN Pans 65mm deep
- 6 bay model also available
- **12 Months on-site warranty**





Note

- All Woodson Food Displays are designed for use with Woodson GN pans. (Other suppliers GN pans may fit, however this is not guaranteed)
- Cabinets require ventilation for built in cold displays
- Optional trolley and panels sold separately

Specifications

Model	WR.CFSQB24
W x D x H (mm)	1504 x 910 x 982
Weight	159kg
Packed Dimensions (mm)	1580 x 1000 x1150
Packed Weight	224kg
Operation	0°C - 8°C
Refrigerant	R290
Max Ambient	32°C
Total Connected Load	0.31kW
Electrical Connection	1Ø+N+E 230VAC / 50Hz 10A plug & lead

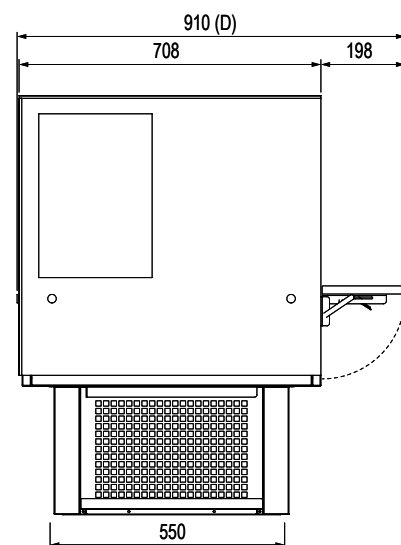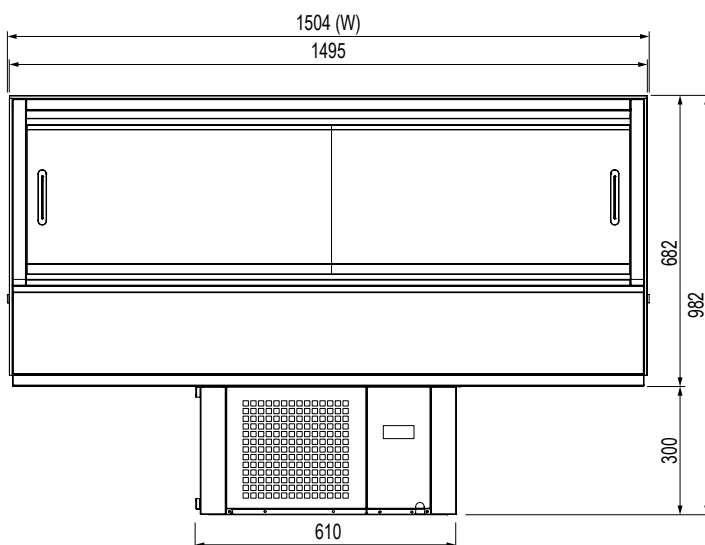

www.stoddart.com.au

www.stoddart.co.nz

Revision: A - 09/07/2026 - 02

Due to continuous product research and development, the information contained herein is subject to change without notice.

