



PRODUCT DOCUMENT PACK

Prepared and distributed by KW Commercial Kitchen

PRODUCT

Giorik CPG926T Pasta Cooker

Model / SKU: CPG926T

KW COMMERCIAL KITCHEN

7/72 Canterbury Road, Bankstown NSW 2200

Phone 1300 001 366

Email sales@kwcommercial.com.au

Web www.kwcommercial.com.au



Scan for the current KW product page

DOCUMENT NOTICE

The supplier document begins on the next page. KW contact branding is added in a separate footer area and does not replace the supplier's instructions, specifications or warranty terms.


Official supplier source: /media/products/81971/documents/spec_sheet-1.pdf




Product Information:

- Class leading, European style, professional quality and reliability since 1963
- 900 series, gas 40 litre, single tank pasta cooker (54 MJ/h)
- Piezo ignition burners with flame failure device and pilot burner
- Burners positioned external to the tank for ease of cleaning inside
- Temperature regulation via variable power flame control
- Low-water level safety switch to prevent operation when empty
- Manual water fill via integrated tap and spout with water drainage via concealed ball valve inside the base
- 316 grade stainless steel tank (340x510mm) for corrosion resistance
- Robust 304 grade stainless steel construction with rounded corners for improved cleaning
- Pressed top work surface with raised edges to protect from overflow
- Enclosed base with front access door
- Height adjustable stainless steel feet for a 900mm working height
- Baskets and lid not included, sold separately (see below)
- 24-month warranty

General Drawing:

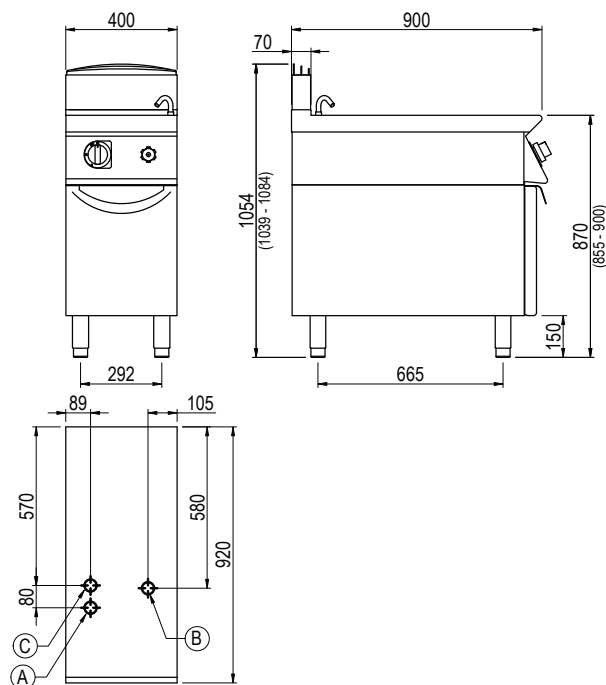

Basket configurations:

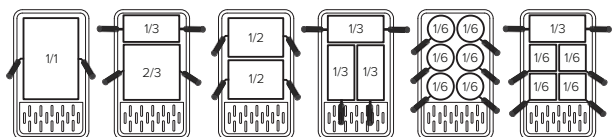

Due to continuous product research and development,
the information contained herein is subject to change without notice.

Revision: 01 - 25/01/2022 - A

www.stoddart.com.au

www.stoddart.co.nz

Specifications:

Model	CPG926T	
W x D x H (mm)	400 x 920 x 1054	
Weight	75kg	
Oil Capacity	40L	
Packed Dimensions (mm)	450 x 1025 x 1200	
Packed Weight (mm)	82kg	
	Natural	Universal LPG
Gas Connection	1/2" BSP	1/2" BSP
Minimum Normal Test Gas Pressure	1.3 kPa	2.75 kPa
Maximum Normal Test Gas Pressure	3.5 kPa	3.5 kPa
Nominal Test Point Pressure	1.0 kPa	2.65 kPa
Total Nominal Gas Consumption	54 MJ/h	54 MJ/h

Note: It is the responsibility of the installing gas plumber to ensure correct supply and connection sustaining appropriate pressure, when all installed gas appliances are operating at maximum.

Legend:

A	Gas Connection
B	Drain Connection 1" BSP
C	Cold Water Connection 1/2" BSP

Accessories - Sold Separately

SPGI.2004152	Lid
SPGI.2101603	1/1 GN Basket
SPGI.2003074	1/2 GN Basket
SPGI.2003080	1/6 GN Round Basket
SPGI.2003045	1/6 GN Basket - right handle
SPGI.2003047	1/6 GN Basket - left handle
SPGI.2003046	1/3 GN Basket - left to right
SPGI.2003075	2/3 GN Basket
SPGI.2003077	1/3 GN Basket - front to back

