



PRODUCT DOCUMENT PACK

Prepared and distributed by KW Commercial Kitchen

PRODUCT

Giorik BG94XAT Bratt Pan

Model / SKU: BG94XAT

KW COMMERCIAL KITCHEN

7/72 Canterbury Road, Bankstown NSW 2200

Phone 1300 001 366

Email sales@kwcommercial.com.au

Web www.kwcommercial.com.au



Scan for the current KW product page

DOCUMENT NOTICE

The supplier document begins on the next page. KW contact branding is added in a separate footer area and does not replace the supplier's instructions, specifications or warranty terms.


Official supplier source: /media/products/81976/documents/spec_sheet-1.pdf



Product Information:

- Class leading, European style, professional quality and reliability since 1963
- 900 series, high performance gas bratt pan with 80 litre capacity and electric tilting pan (77 MJ/H)
- Duplex 2304 stainless steel base for superior heat transfer, strength, and corrosion resistance
- Electronic ignition tubular burners with flame failure device and pilot burner complete with Hi-limit temperature protection
- Temperature regulation via thermostat (50°C - 300°C)
- Heating shut-off via micro-switch when the pan is tilted
- Indicator lights to monitor the correct operation of the appliance
- Water fill via integrated valve and spout
- Double skinned, counterbalanced lid with rear condensation channel
- Robust 304 grade stainless steel construction with rounded corners for improved cleaning
- Height adjustable stainless steel feet for a 900mm working height
- 24-month warranty

General Drawing:

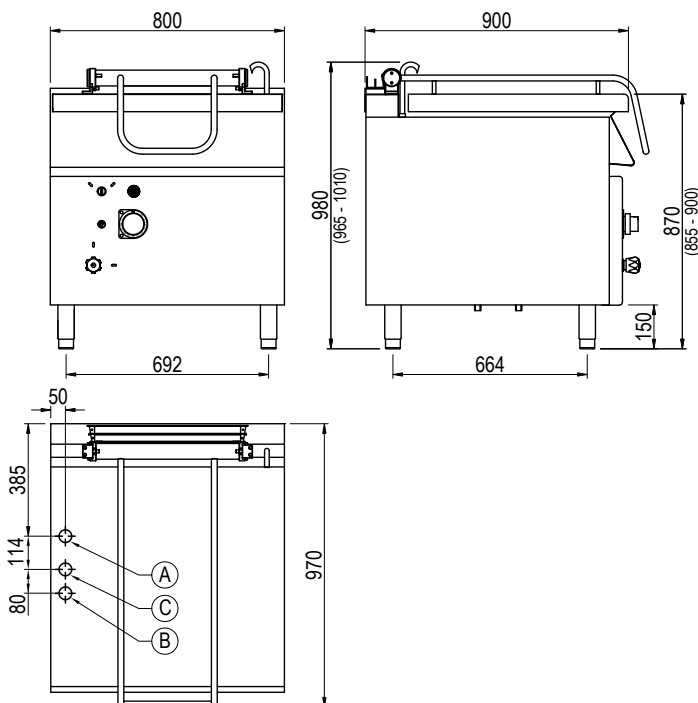

Specifications:

Model	BG94XAT	
W x D x H (mm)	800 x 970 x 980	
Weight	170kg	
Capacity	80L	
Cooking Area	726 x 595 x 130	
Packed Dimensions (mm)	845 x 1025 x 1120	
Packed Weight (mm)	182kg	
Electrical Connection	1Ø + N + E 240VAC / 50Hz / 0.1kW 10A plug & lead fitted	
Gas Connection	Natural	Universal LPG
Minimum Normal Test Gas Pressure	1/2" BSP 1.3 kPa	1/2" BSP 2.75 kPa
Maximum Normal Test Gas Pressure	3.5 kPa	3.5 kPa
Nominal Test Point Pressure	1.0 kPa	2.65 kPa
Total Nominal Gas Consumption	77 MJ/H	77 MJ/H

Note: It is the responsibility of the installing gas plumber to ensure correct supply and connection sustaining appropriate pressure, when all installed gas appliances are operating at maximum.

Legend:

- A** Gas Connection
- B** Electrical Connection
- C** Water Connection 1/2" BSP

Due to continuous product research and development, the information contained herein is subject to change without notice.

Revision: 02 - 08/04/2026 - A

www.stoddart.com.au

www.stoddart.co.nz

