



PRODUCT DOCUMENT PACK

Prepared and distributed by KW Commercial Kitchen

PRODUCT

Giorik BG96XAT Bratt Pan

Model / SKU: BG96XAT

KW COMMERCIAL KITCHEN

7/72 Canterbury Road, Bankstown NSW 2200

Phone 1300 001 366

Email sales@kwcommercial.com.au

Web www.kwcommercial.com.au



Scan for the current KW product page

DOCUMENT NOTICE

The supplier document begins on the next page. KW contact branding is added in a separate footer area and does not replace the supplier's instructions, specifications or warranty terms.


Official supplier source: [/media/products/81977/documents/spec_sheet-1.pdf](/media/products/81977/documents/spec_sheet-1.pdf)



Product Information:

- Class leading, European style, professional quality and reliability since 1963
- 900 series, high performance gas bratt pan with 120 litre capacity and electric tilting pan (93 MJ/h)
- Duplex 2304 stainless steel base for superior heat transfer, strength, and corrosion resistance
- Electronic ignition tubular burners with flame failure device and pilot burner complete with Hi-limit temperature protection
- Temperature regulation via thermostat (50°C - 300°C)
- Heating shut-off via micro-switch when the pan is tilted
- Indicator lights to monitor the correct operation of the appliance
- Water fill via integrated valve and spout
- Double skinned, counterbalanced lid with rear condensation channel
- Robust 304 grade stainless steel construction with rounded corners for improved cleaning
- Height adjustable stainless steel feet for a 900mm working height
- 24-month warranty

General Drawing:

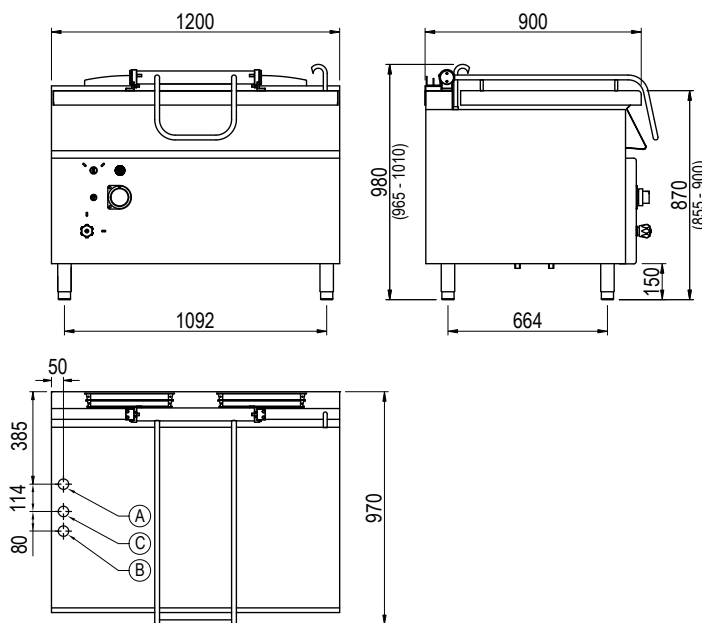

Specifications:

Model	BG96XAT	
W x D x H (mm)	1200 x 970 x 980	
Weight	200kg	
Capacity	120L	
Cooking Area	1126 x 595 x 130	
Packed Dimensions (mm)	1250 x 1025 x 1200	
Packed Weight (mm)	217kg	
Electrical Connection	1Ø + N + E 240VAC / 50Hz / 0.1kW 10A plug & lead fitted	
Gas Connection	Natural 1/2" BSP	Universal LPG 1/2" BSP
Minimum Normal Test Gas Pressure	1.3 kPa	2.75 kPa
Maximum Normal Test Gas Pressure	3.5 kPa	3.5 kPa
Nominal Test Point Pressure	1.0 kPa	2.65 kPa
Total Nominal Gas Consumption	93 MJ/h	93 MJ/h

Note: It is the responsibility of the installing gas plumber to ensure correct supply and connection sustaining appropriate pressure, when all installed gas appliances are operating at maximum.

Legend:

- A** Gas Connection
- B** Electrical Connection
- C** Water Connection 1/2" BSP

Due to continuous product research and development, the information contained herein is subject to change without notice.

Revision: 02 - 08/04/2026 - A

www.stoddart.com.au

www.stoddart.co.nz

