




Product Information:

- Class leading, European style, professional quality and reliability since 1963
- 900 series, high performance gas bratt pan with 120 litre capacity and electric tilting pan (93 MJ/h)
- Duplex 2304 stainless steel base for superior heat transfer, strength, and corrosion resistance
- Electronic ignition tubular burners with flame failure device and pilot burner complete with Hi-limit temperature protection
- Temperature regulation via thermostat (50°C - 300°C)
- Heating shut-off via micro-switch when the pan is tilted
- Indicator lights to monitor the correct operation of the appliance
- Water fill via integrated valve and spout
- Double skinned, counterbalanced lid with rear condensation channel
- Robust 304 grade stainless steel construction with rounded corners for improved cleaning
- Height adjustable stainless steel feet for a 900mm working height
- 24-month warranty

General Drawing:

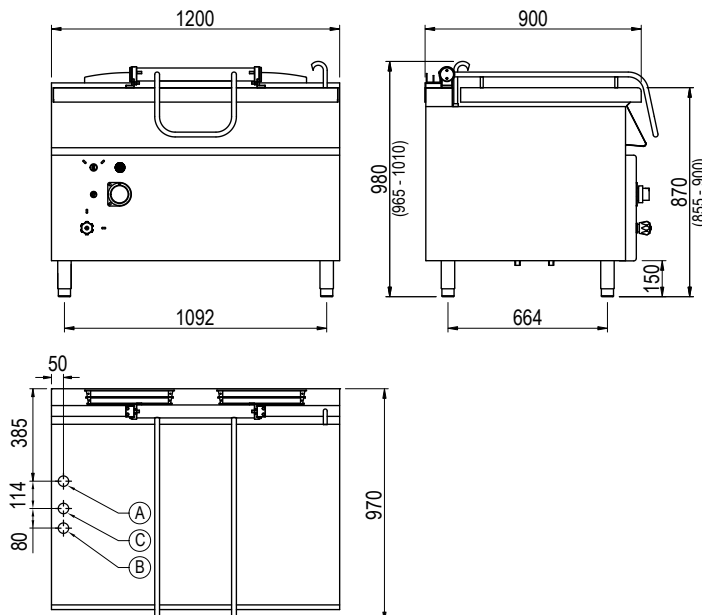

Specifications:

Model	BG96XAT	
W x D x H (mm)	1200 x 970 x 980	
Weight	200kg	
Capacity	120L	
Cooking Area	1126 x 595 x 130	
Packed Dimensions (mm)	1250 x 1025 x 1200	
Packed Weight (mm)	217kg	
Electrical Connection	1Ø + N + E 240VAC / 50Hz / 0.1kW 10A plug & lead fitted	
Gas Connection	Natural	Universal LPG
Minimum Normal Test Gas Pressure	1/2" BSP 1.3 kPa	1/2" BSP 2.75 kPa
Maximum Normal Test Gas Pressure	3.5 kPa	3.5 kPa
Nominal Test Point Pressure	1.0 kPa	2.65 kPa
Total Nominal Gas Consumption	93 MJ/h	93 MJ/h

Note: It is the responsibility of the installing gas plumber to ensure correct supply and connection sustaining appropriate pressure, when all installed gas appliances are operating at maximum.

Legend:

- A** Gas Connection
- B** Electrical Connection
- C** Water Connection 1/2" BSP