



PRODUCT DOCUMENT PACK

Prepared and distributed by KW Commercial Kitchen

PRODUCT

Hoshizaki 97000172 FTC-125DEA-GN-4D 270L 4 Drawer 150mm Deep Gastronorm Underb

Model / SKU: 97000172

KW COMMERCIAL KITCHEN

7/72 Canterbury Road, Bankstown NSW 2200

Phone 1300 001 366

Email sales@kwcommercial.com.au

Web www.kwcommercial.com.au




Scan for the current KW product page



DOCUMENT NOTICE

The supplier document begins on the next page. KW contact branding is added in a separate footer area and does not replace the supplier's instructions, specifications or warranty terms.

Official supplier source: [/media/products/82196/documents/spec_sheet-3.pdf](/media/products/82196/documents/spec_sheet-3.pdf)

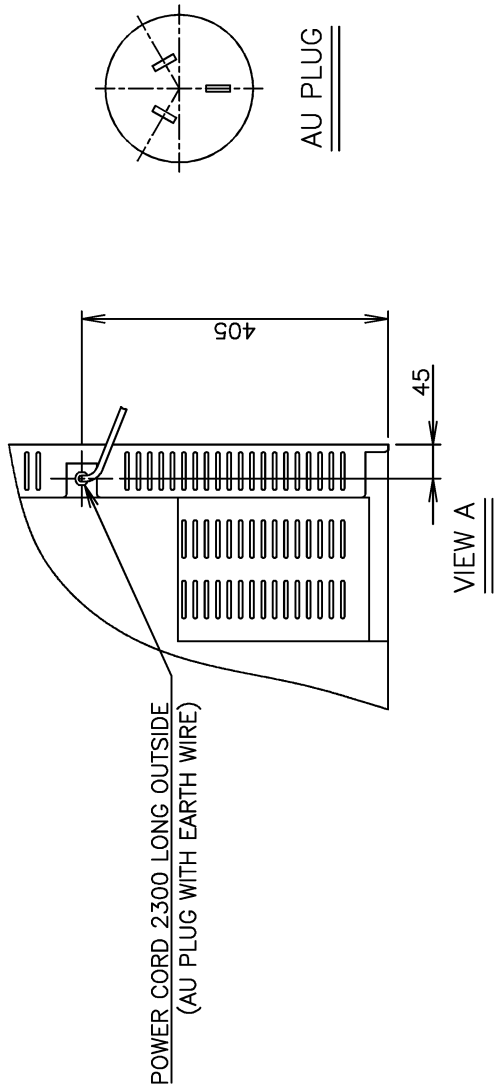

1. Install the product properly in accordance with the instructions on location, electrical connections stated in the instruction manual provided.
Allow 10mm extra space at the installation site to meet any installation requirements (additional spacing is also required for proper air flow and pipe connections).
2. The heat rejection is based on the reached pulldown temperature at ambient temperature of 32° C and power supply of 230V 50Hz.
The amperage and electric consumption are based on measurements at ambient temperature of 32°C and power supply of 230V 50Hz.
3. The cabinet temperature range of -25 to -7°C is guaranteed at ambient temperature of 30°C.
4. Product code: T018-C824

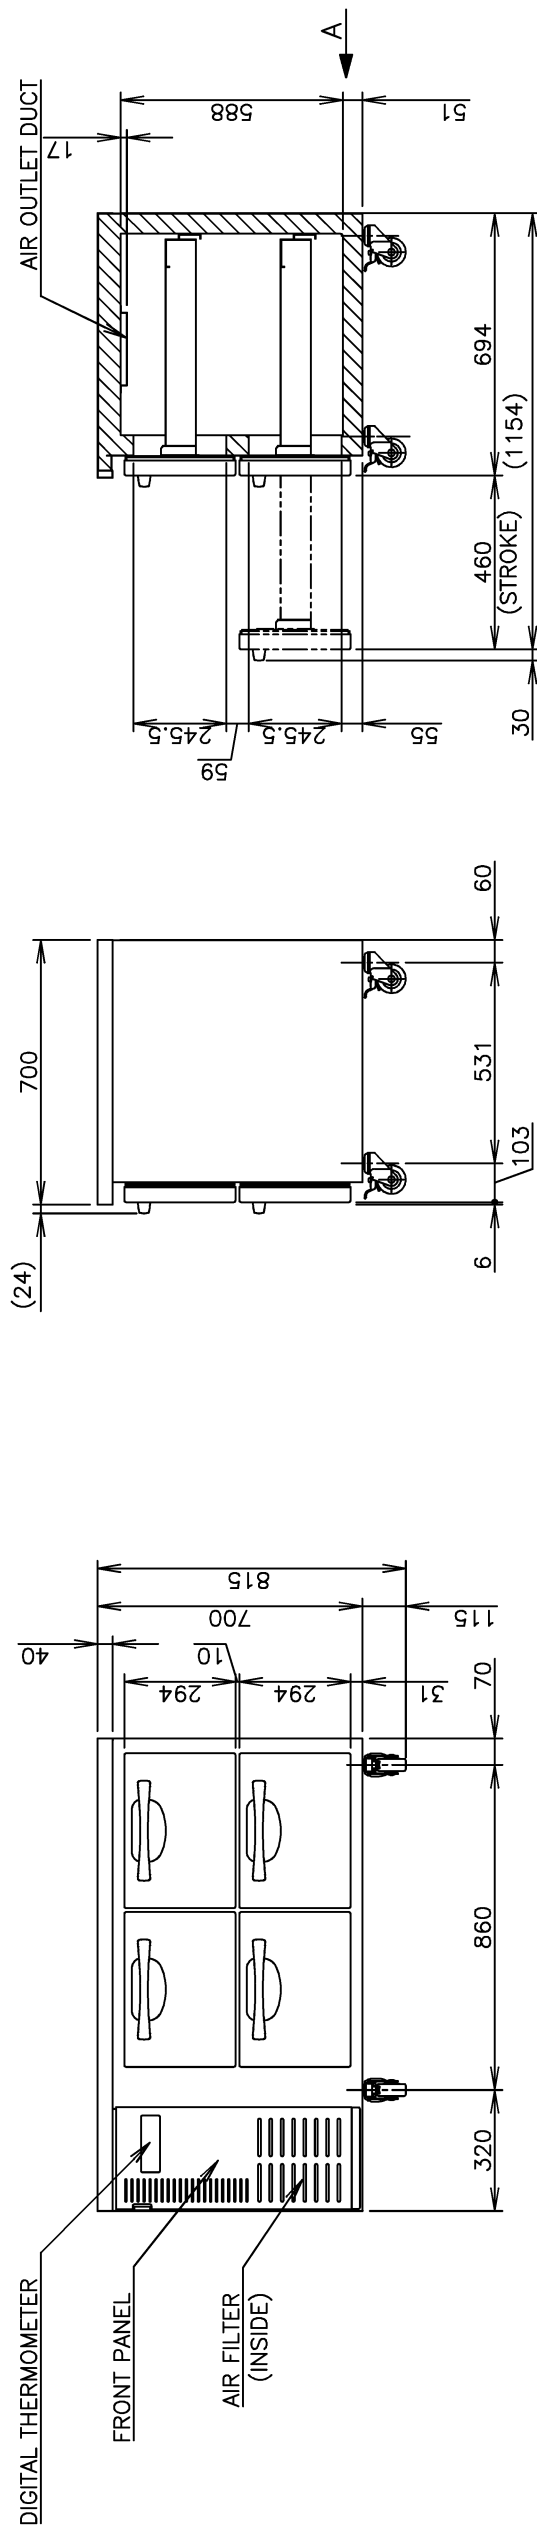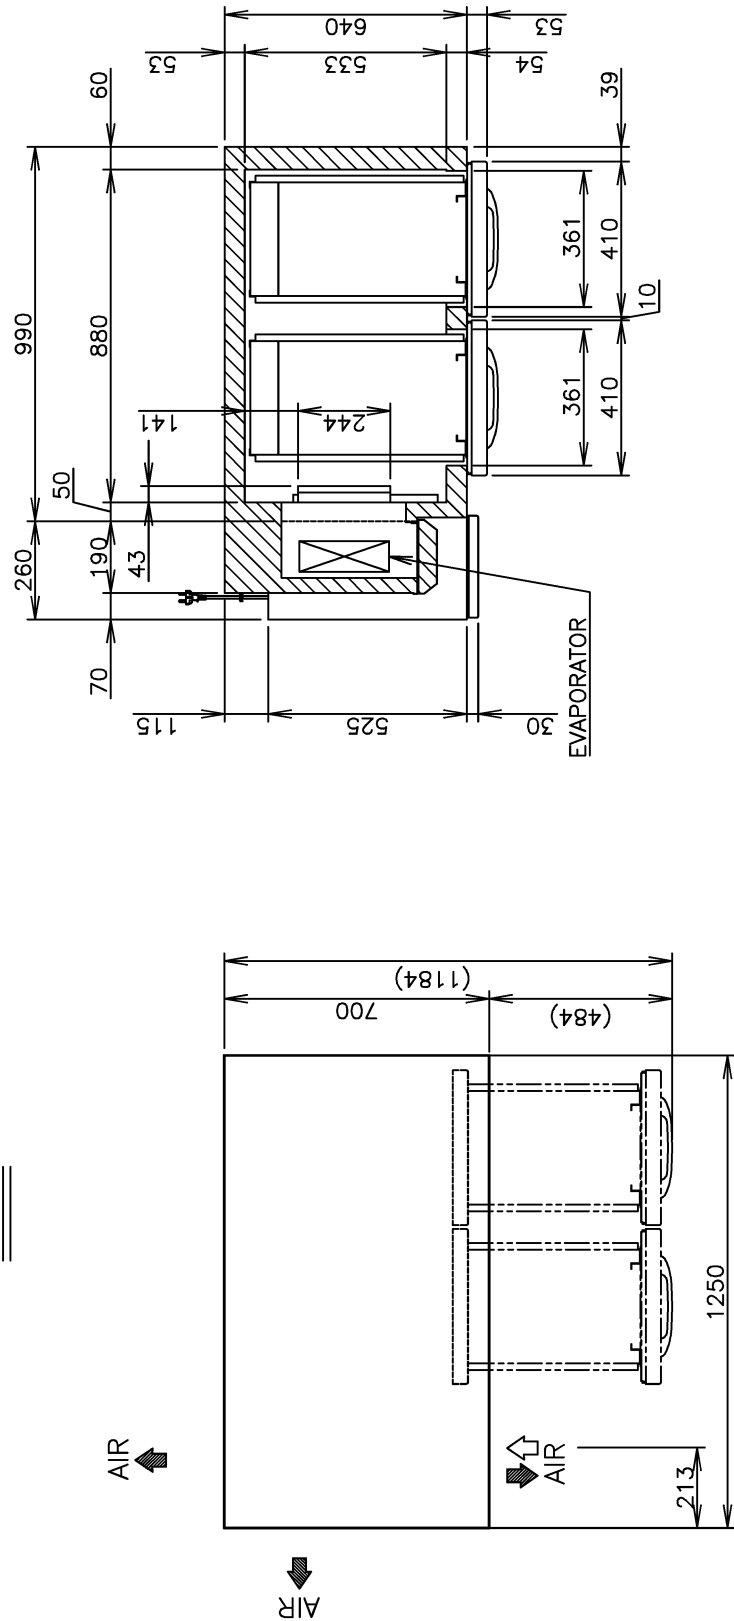

ITEM	Hoshizaki Drawer Type Undercounter Freezer		
MODEL	FTC-125DEA-GN-4D		
POWER SUPPLY	1 Phase 220-240V 50Hz Capacity: 1.14kVA (5.2A)		
AMPERAGE	Rated: 3.9A		
ELECTRIC CONSUMPTION	Motor: *W (Power Factor: %) Heater: 379W Refrigeration: *W Defrost: 379W		
HEAT REJECTION	*W		
POWER CORD	2.3m (Plug with Earth Wire)		
EFFECTIVE CAPACITY	270L		
OUTSIDE DIMENSIONS	1250mm (W) x 700mm (D) x 815mm (H)		
INSIDE DIMENSIONS	880mm (W) x 533mm (D) x 588mm (H)		
EXTERIOR	Stainless Steel, Galvanized Steel (Rear / Bottom)		
INTERIOR	Stainless Steel, ABS Plastic		
INSULATION	Polyurethane Foam		
INSULATION FOAM BLOWING AGENT	Cyclopentane		
REFRIGERATION SYSTEM	Forced Air Circulation		
DEFROST SYSTEM	Glass Tube Heater		
COMPRESSOR	Hermetic 495W		
CONDENSER	Fin and Tube type, Air-cooled		
EVAPORATOR	Fin and Tube Type		
REFRIGERANT	R404A / 190g		
TEMPERATURE CONTROL	Microprocessor (Digital Temp Indication) Adjustable from -25 to -7°C		
DEFROST CONTROL	Microprocessor Controlled		
ELECTRIC CIRCUIT PROTECTION	Fuse, Earth Wire		
REFRIGERANT CIRCUIT PROTECTION	Motor Protector		
LEG	Urethane (76mm DIA, 115mm HIGH)		
WEIGHT	109kg (Gross Approx. *kg)		
PACKAGE	Carton 1315mm (W) x 780mm (D) x 950mm (H)		
OPERATING CONDITIONS	Ambient Temperature: 5-43°C Voltage Range: Rated Voltage±6%		

*We reserve the right to make changes in specifications and design without prior notice.

HOSHIZAKI DRAWER TYPE UNDERCOUNTER FREEZER FTC-125DEA-GN-4D									
APPROVED KAWAKAMI		CHECKED WANG		DESIGNED LIU		DRAWN ZHANG		SCALE 1/20	
* *		* △		* *		DATE		DRAWING NO.	
APPROVED		DESIGNED		DATE		2019.02.15		D24516	
SYMBOL		SYMBOL		SYMBOL		SYMBOL		SYMBOL	