



PRODUCT DOCUMENT PACK

Prepared and distributed by KW Commercial Kitchen

PRODUCT

Hoshizaki 91000158 IM-45CPE-28-F 36KG CUBE ICE MAKER WITH DRAIN PUMP - SELF C

Model / SKU: 91000158

KW COMMERCIAL KITCHEN

7/72 Canterbury Road, Bankstown NSW 2200

Phone 1300 001 366

Email sales@kwcommercial.com.au

Web www.kwcommercial.com.au



Scan for the current KW product page

DOCUMENT NOTICE

The supplier document begins on the next page. KW contact branding is added in a separate footer area and does not replace the supplier's instructions, specifications or warranty terms.

Official supplier source: /media/products/82232/documents/spec_sheet-3.pdf



HOSHIZAKI

IM - 45CPE – 28 - F


Model Number
91000158

Cube 36kg Ice Maker with Drain Pump - Self Contained



Hoshizaki IM-45CPE-F FlexiCube model is a self-contained ice maker with internal drain pump producing up to 42kg (10°C Air temp; 10°C Water) of cube ice per 24 hours.

- Produces compact, dry, tasteless and slow melting cube ice, allowing just the right amount of dilution.
- Automated cleaning (wash auto-restart).
- Water circuit cleaning notification.
- Condenser cleaning notification.
- Magnetic dc pump motor with variable speed.
- High grade stainless steel.
- Stand-by/wash buttons.
- Removable door gasket.
- Easy-clean air filter.
- Flexicube models include an integrated drain pump, enabling flexible placement of the ice maker, regardless of drain position or height.
- Internal drain pump models allow for positioning radius of 10m distance and up to 1.5m height to drain point (based at max 10m distance).



Cube Size: **STANDARD**
Weight: 23 g

PRODUCT SPECIFICATION

Ice Type	Cube
Production Capacity per 24hours	Approx. 42kg @ 10°C Air temp; 10°C Water Approx. 36kg @ 21°C Air temp; 15°C Water Approx. 29kg @ 32°C Air temp; 21°C Water
Max Storage Capacity	Approx. 15kg (Bin Control Setting Approx. 8kg)
Dimensions	633mm (W), 511mm (D), 780mm (H)
Weight Net Packed Weight	44kg 54kg
Cooling	Air
AC Supply Voltage	1 PHASE 220-240V 50Hz/ 10 AMP Plug
Refrigerant	R290
Operating Conditions	Ambient Temp.: 1-40°C Water Supply Temp.: 5-35°C Water Supply Pressure: 0.07-0.8MPa (0.7 - 8bar) Voltage Range: Rated Voltage ±6%
Water Consumption Per 24h	Approx. 0.11m³ @ 10°C Air temp; 10°C Water Approx. 0.05m³ @ 21°C Air temp; 15°C Water Approx. 0.04m³ @ 32°C Air temp; 21°C Water
Heat Rejection (AT 32°C, WT 21°C)	710W
Accessories included	Installation kit, Scoop
GEM Number	AIM0018

INSTALLATION REQUIREMENTS

- Ensure the condenser is cleaned periodically as per the manufacturer's manual.
- Do not plug the unit into multi-plug power boards with other appliances
- Room ventilation or air conditioning can improve the situation by reducing the humidity.
- Hoshizaki recommends the use of a compatible water filter to prevent non-warrantable scale & sediment complications.

*Refer to manual for full installation & maintenance requirements.



For free 6 month extended warranty, register online within 4 weeks of purchase date.
hoshizaki.com.au

Descriptions and specifications are subject to change at any time, without notice.
Illustrations for demonstration purposes. Copyright © 2026 Hoshizaki Lancer Pty Ltd. All right reserved.



Distributed by KW Commercial Kitchen | 1300 001 366
www.kwcommercial.com.au | sales@kwcommercial.com.au






HOSHIZAKI


IM - 45CPE – 28 - F

Cube 36kg Ice Maker with Drain Pump - Self Contained

TECHNICAL DRAWING

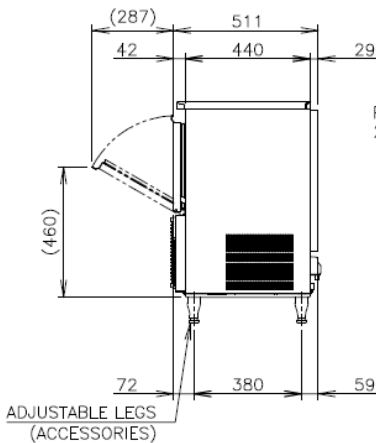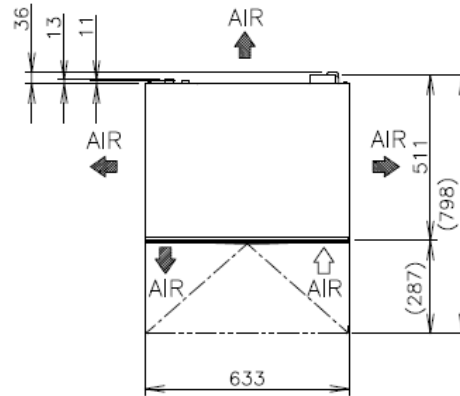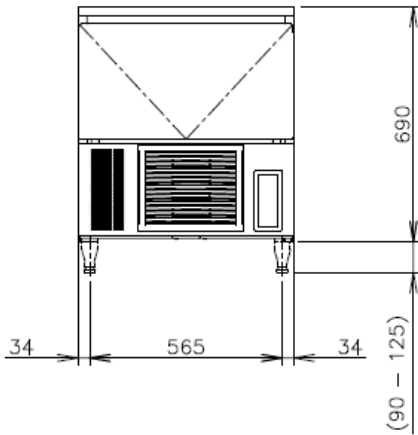

POWER CORD
2000 LONG OUTSIDE

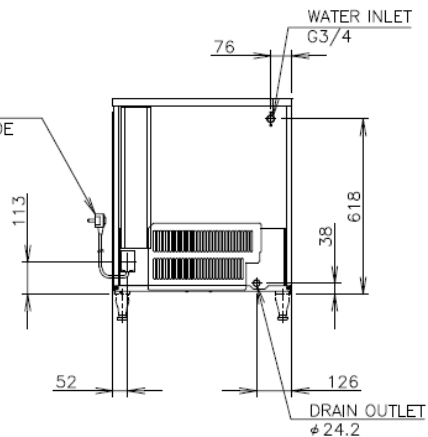

For free 6 month extended warranty, register online within 4 weeks of purchase date.

hoshizaki.com.au

Descriptions and specifications are subject to change at any time, without notice.
Illustrations for demonstration purposes. Copyright © 2026 Hoshizaki Lancer Pty Ltd. All right reserved.