



PRODUCT DOCUMENT PACK

Prepared and distributed by KW Commercial Kitchen

PRODUCT

Hoshizaki 91000162 IM-65PE-28-F 48KG CUBE ICE MAKER WITH DRAIN PUMP - SELF CO

Model / SKU: 91000162

KW COMMERCIAL KITCHEN

7/72 Canterbury Road, Bankstown NSW 2200

Phone 1300 001 366

Email sales@kwcommercial.com.au

Web www.kwcommercial.com.au



Scan for the current KW product page

DOCUMENT NOTICE

The supplier document begins on the next page. KW contact branding is added in a separate footer area and does not replace the supplier's instructions, specifications or warranty terms.

Official supplier source: /media/products/82236/documents/spec_sheet-3.pdf



HOSHIZAKI

IM - 65PE - 28 - F


Model Number
91000182

48KG Cube Ice Maker, Self Contained



Hoshizaki IM-65PE-F FlexiCube model is a self-contained ice maker with internal drain pump producing up to **55kg (10°C Air temp; 10°C Water)** of cube ice per 24 hours.

- Produces compact, dry, tasteless and slow melting cube ice, allowing just the right amount of dilution.
- Automated cleaning (wash auto-restart).
- Water circuit cleaning notification.
- Condenser cleaning notification.
- Magnetic dc pump motor with variable speed.
- High grade stainless steel.
- Stand-by/wash buttons.
- Removable door gasket.
- Easy-clean air filter.
- Flexicube models include an integrated drain pump, enabling flexible placement of the ice maker, regardless of drain position or height.
- Internal drain pump models allow for positioning radius of 10m distance and up to 1.5m height to drain point (based at max 10m distance).



Cube Size: **STANDARD**
Weight: 23 g

PRODUCT SPECIFICATION

Ice Type	Cube
Production Capacity per 24hours	Approx. 55kg @ 10°C Air temp; 10°C Water Approx. 48kg @ 21°C Air temp; 15°C Water Approx. 39kg @ 32°C Air temp; 21°C Water
Max Storage Capacity	Approx. 26kg (Bin Control Setting Approx. 18kg)
Dimensions	633mm (W), 506mm (D), 930mm (H) (840mm without legs)
Weight Net Packed Weight	49kg 59kg
Cooling	Air
AC Supply Voltage	1 PHASE 220-240V 50Hz/ 10 AMP Plug
Refrigerant	R290
Operating Conditions	Ambient Temp.: 1-40°C Water Supply Temp.: 5-35°C Water Supply Pressure: 0.07-0.8MPa (0.7 - 8bar) Voltage Range: Rated Voltage ±6%
Water Consumption Per 24h	Approx. 0.43m³ @ 10°C Air temp; 10°C Water Approx. 0.12m³ @ 21°C Air temp; 15°C Water Approx. 0.10m³ @ 32°C Air temp; 21°C Water
Heat Rejection (AT 32°C, WT 21°C)	830W
Accessories included	Installation kit, Scoop
GEM Number	AIM0010

INSTALLATION REQUIREMENTS

- Ensure the condenser is cleaned periodically as per the manufacturer's manual.
- Do not plug the unit into multi-plug power boards with other appliances
- Room ventilation or air conditioning can improve the situation by reducing the humidity.
- Hoshizaki recommends the use of a compatible water filter to prevent non-warrantable scale & sediment complications.

*Refer to manual for full installation & maintenance requirements.



For free 6 month extended warranty, register online within 4 weeks of purchase date.
hoshizaki.com.au

Descriptions and specifications are subject to change at any time, without notice.
Illustrations for demonstration purposes. Copyright © 2026 Hoshizaki Lancer Pty Ltd. All right reserved.







HOSHIZAKI

IM - 65PE - 28 - F

48KG Cube Ice Maker, Self Contained

TECHNICAL DRAWING

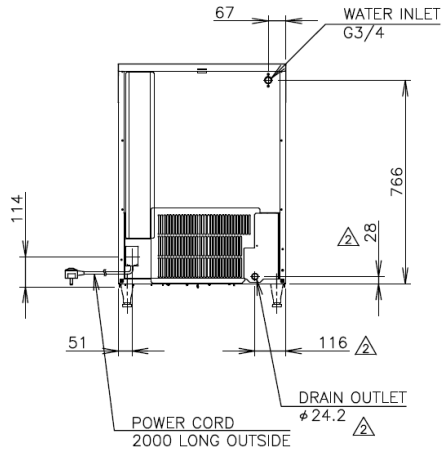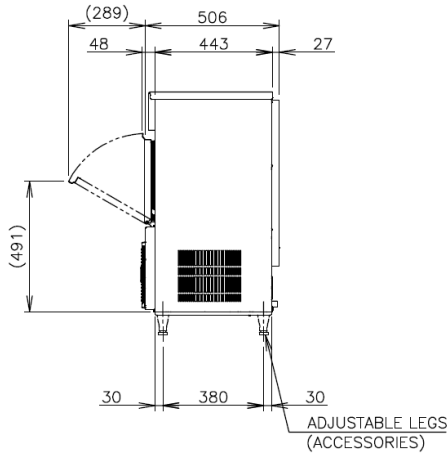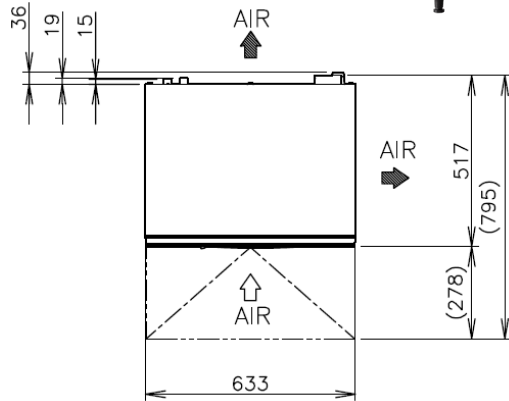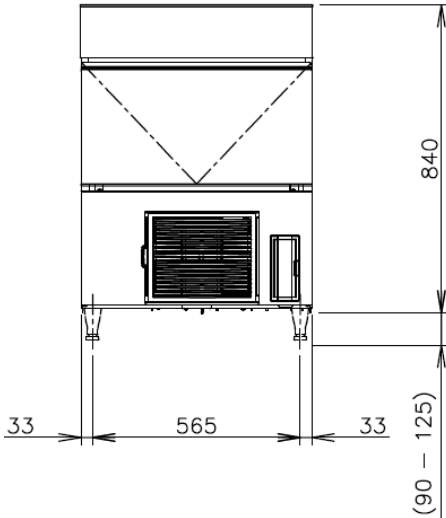

For free 6 month extended warranty, register online within 4 weeks of purchase date.

hoshizaki.com.au

Descriptions and specifications are subject to change at any time, without notice.
Illustrations for demonstration purposes. Copyright © 2026 Hoshizaki Lancer Pty Ltd. All right reserved.