



## PRODUCT DOCUMENT PACK

Prepared and distributed by KW Commercial Kitchen

### PRODUCT

**Hoshizaki 91000167 IM-240PE-23 145KG CUBE ICE MAKER – SELF CONTAINED**

**Model / SKU: 91000167**

#### KW COMMERCIAL KITCHEN

7/72 Canterbury Road, Bankstown NSW 2200

Phone 1300 001 366

Email [sales@kwcommercial.com.au](mailto:sales@kwcommercial.com.au)

Web [www.kwcommercial.com.au](http://www.kwcommercial.com.au)



Scan for the current KW product page

### DOCUMENT NOTICE

The supplier document begins on the next page. KW contact branding is added in a separate footer area and does not replace the supplier's instructions, specifications or warranty terms.

Official supplier source: [/media/products/82245/documents/spec\\_sheet-3.pdf](/media/products/82245/documents/spec_sheet-3.pdf)



# HOSHIZAKI




Hoshizaki IM-240PE-F-23 FlexiCube model is a self-contained ice maker with internal drain pump producing up to 165kg (10°C Air temp; 10°C Water) of cube ice per 24 hours.

- Produces compact, dry, tasteless and slow melting cube ice, allowing just the right amount of dilution.
- Automated cleaning (wash auto-restart).
- Water circuit cleaning notification.
- Condenser cleaning notification.
- Magnetic dc pump motor with variable speed.
- High grade stainless steel.
- Stand-by/wash buttons.
- Removable door gasket.
- Easy-clean air filter.
- Flexicube models include an integrated drain pump, enabling flexible placement of the ice maker, regardless of drain position or height.
- Internal drain pump models allow for positioning radius of 10m distance and up to 1.5m height to drain point (based at max 10m distance).

## IM - 240PE - 23 - F

Model Number  
**91000188**

Cube 145kg Ice Maker with Drain Pump - Self Contained



Cube Size: **M-23**  
Weight: 17 g

### PRODUCT SPECIFICATION

| Ice Type                          | Cube                                                                                                                                                                      |
|-----------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Production Capacity per 24hours   | Approx. 165kg @10°C Air temp; 10°C Water<br>Approx. 145kg @ 21°C Air temp; 15°C Water<br>Approx. 140kg @ 32°C Air temp; 21°C Water                                        |
| Max Storage Capacity              | Approx. 110kg<br>(Bin Control Setting Approx. 80kg)                                                                                                                       |
| Dimensions                        | 704mm (W), 665mm (D), 1580mm (H)                                                                                                                                          |
| Weight Net   Packed Weight        | 102kg   115kg                                                                                                                                                             |
| Cooling                           | Air                                                                                                                                                                       |
| AC Supply Voltage                 | 1 PHASE 220-240V 50Hz/ 10 AMP Plug                                                                                                                                        |
| Refrigerant                       | R290                                                                                                                                                                      |
| Operating Conditions              | Ambient Temp.: 1-40°C<br>Water Supply Temp.: 5-35°C<br>Water Supply Pressure: 0.07-0.8MPa (0.7 - 8bar)<br>Voltage Range: Rated Voltage ±6%                                |
| Water Consumption Per 24h         | Approx. 0.68m <sup>3</sup> @10°C Air temp; 10°C Water<br>Approx. 0.37m <sup>3</sup> @ 21°C Air temp; 15°C Water<br>Approx. 0.36m <sup>3</sup> @ 32°C Air temp; 21°C Water |
| Heat Rejection (AT 32°C, WT 21°C) | 2580W                                                                                                                                                                     |
| Accessories included              | Installation kit, Scoop                                                                                                                                                   |
| GEM Number                        | AIM0029                                                                                                                                                                   |

### INSTALLATION REQUIREMENTS

- Ensure the condenser is cleaned periodically as per the manufacturer's manual.
- Do not plug the unit into multi-plug power boards with other appliances
- Room ventilation or air conditioning can improve the situation by reducing the humidity.
- Hoshizaki recommends the use of a compatible water filter to prevent non-warrantable scale & sediment complications.

\*Refer to manual for full installation & maintenance requirements.



For free 6 month extended warranty, register online within 4 weeks of purchase date.  
[hoshizaki.com.au](http://hoshizaki.com.au)

Descriptions and specifications are subject to change at any time, without notice.  
Illustrations for demonstration purposes. Copyright © 2026 Hoshizaki Lancer Pty Ltd. All right reserved.




# HOSHIZAKI

## IM - 240PE - 23 - F

Cube 145kg Ice Maker with Drain Pump - Self Contained

### TECHNICAL DRAWING

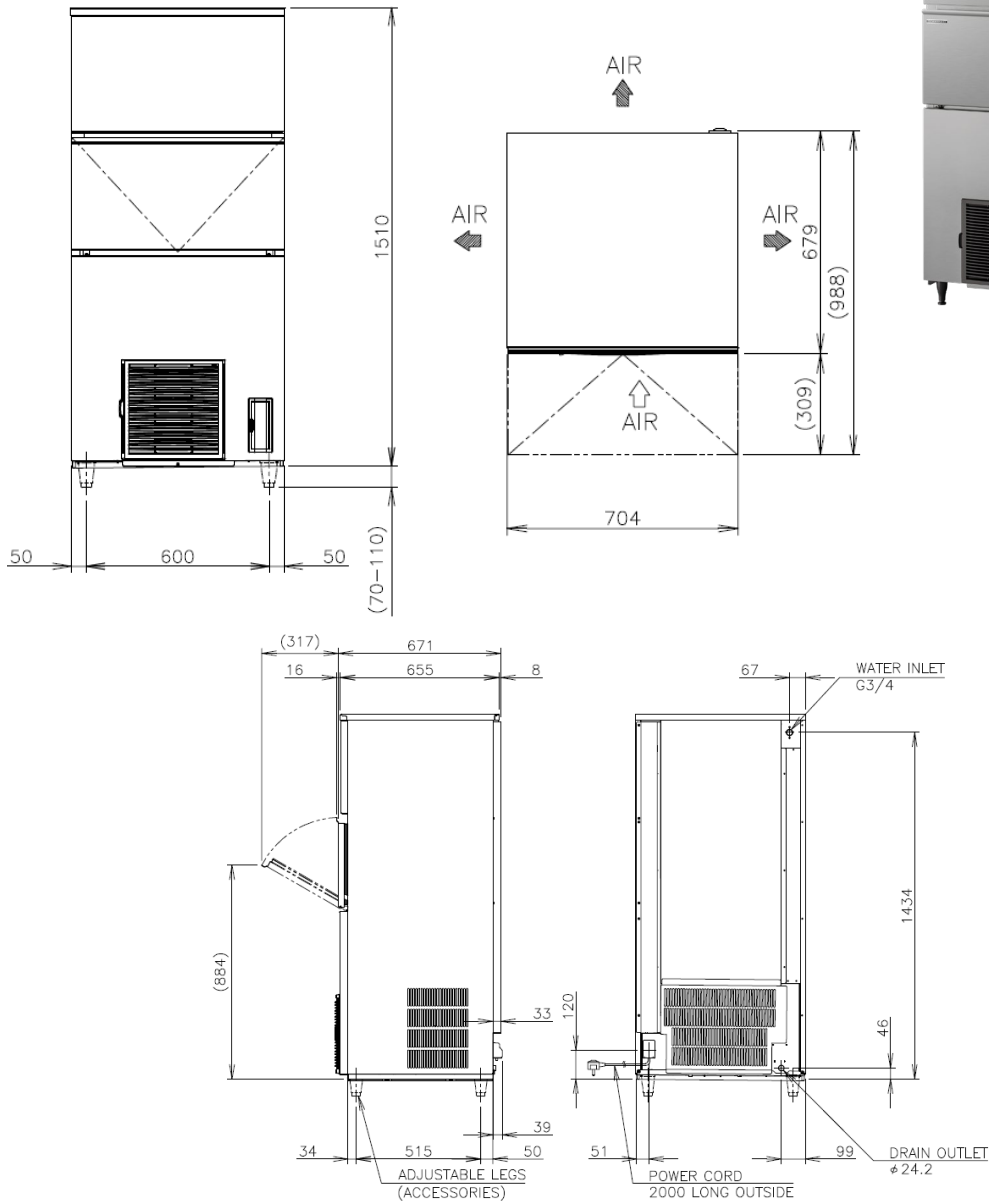

For free 6 month extended warranty, register online within 4 weeks of purchase date.

[hoshizaki.com.au](http://hoshizaki.com.au)

Descriptions and specifications are subject to change at any time, without notice.  
Illustrations for demonstration purposes. Copyright © 2026 Hoshizaki Lancer Pty Ltd. All right reserved.