



PRODUCT DOCUMENT PACK

Prepared and distributed by KW Commercial Kitchen

PRODUCT

True TGN-1R-1G RH 2/1 GN Upright Reach-In Food Service Refrigerator, 1 Full Glass Swir

Model / SKU: TGN-1R-1G RH

KW COMMERCIAL KITCHEN

7/72 Canterbury Road, Bankstown NSW 2200

Phone 1300 001 366

Email sales@kwcommercial.com.au

Web www.kwcommercial.com.au



Scan for the current KW product page

DOCUMENT NOTICE

The supplier document begins on the next page. KW contact branding is added in a separate footer area and does not replace the supplier's instructions, specifications or warranty terms.

Official supplier source: <https://true-middleware.s3.eu-west-1.amazonaws.com/pdfs/aus/TGN-1R-1G.pdf>

Upright Cabinets

TGN-1R-1G



2/1 GN Upright Reach-In Food Service Refrigerator, 1 Glass Swing Glass Door



Dimensions	
External Width (mm)	729
External Depth (mm)	858
External Height (mm)	2079
Exclusions	Depth does not include 44 mm for door handle or 12 mm for rear access panel.
Net Volume (Litres)	435
Gross Volume (Litres)	570
Display Area (m ²)	0.61
Supplied Shelves	3
Shelf Size (L x D mm)	530 x 650
Internal Net Height (mm)	1330
Packaged Weight (kg)	152
Packaged Dimensions (W x D x H mm)	1016 x 813 x 2134
Supplied with	Heavy duty lock-in-place ø 64 mm castors (83 mm height)
Unpackaged Weight (kg)	140

Build	
Door Description	1 Full Glass Swing Door
Door Opening	Right (standard) or Left Field Reversible
Exterior Construction	Stainless steel front with aluminum ends. Corrosion resistant GalFan coated steel back and top.
Interior Construction	Clear aluminum liner with stainless steel floor.
Air Intake Position	Front
Ventilation Position	Rear
Clearance Required	26 mm rear, zero sides
Cord Length (Meters)	3.05
Internal Lighting	LED
Standard w/ Locks	Standard

Technical	
Temperature Range	0.5 : 3.3°C
Refrigerant	R290
Voltage/Frequency/Phase	220-240V/50-60Hz /1
Amps	1.3
Watts	298
Climate Class	3
Operating Statement	Tested at 25°C, 60% RH, per 'Refrigerators with a Direct Sales Function' for perishable food merchandising.
Test Standard	EN ISO 23953-2:2023
EEC	A
Energy Efficiency Index	8.8
Defrost Type	Auto
Energy Consumption (kWh/24h)	1.64
Energy Consumption (kWh/Annum)	599
Temperature Class	M1

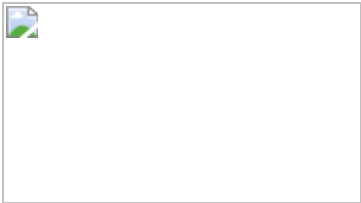


Specifications subject to change without notice.
Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")

UK & Ireland
EMEA
Australia



[0800 783 2049](tel:08007832049)
[+41 61 563 07 05](tel:+41615630705)
[+61 2 9619 9999](tel:+61296199999)

TFIUK@truemfg.com
TrueCHCustomerService@truemfg.com
TrueRefAus@truemfg.com



TGN-1R-1G

2/1 GN Upright Reach-In Food Service Refrigerator, 1 Glass Swing Glass Door

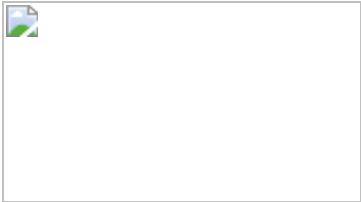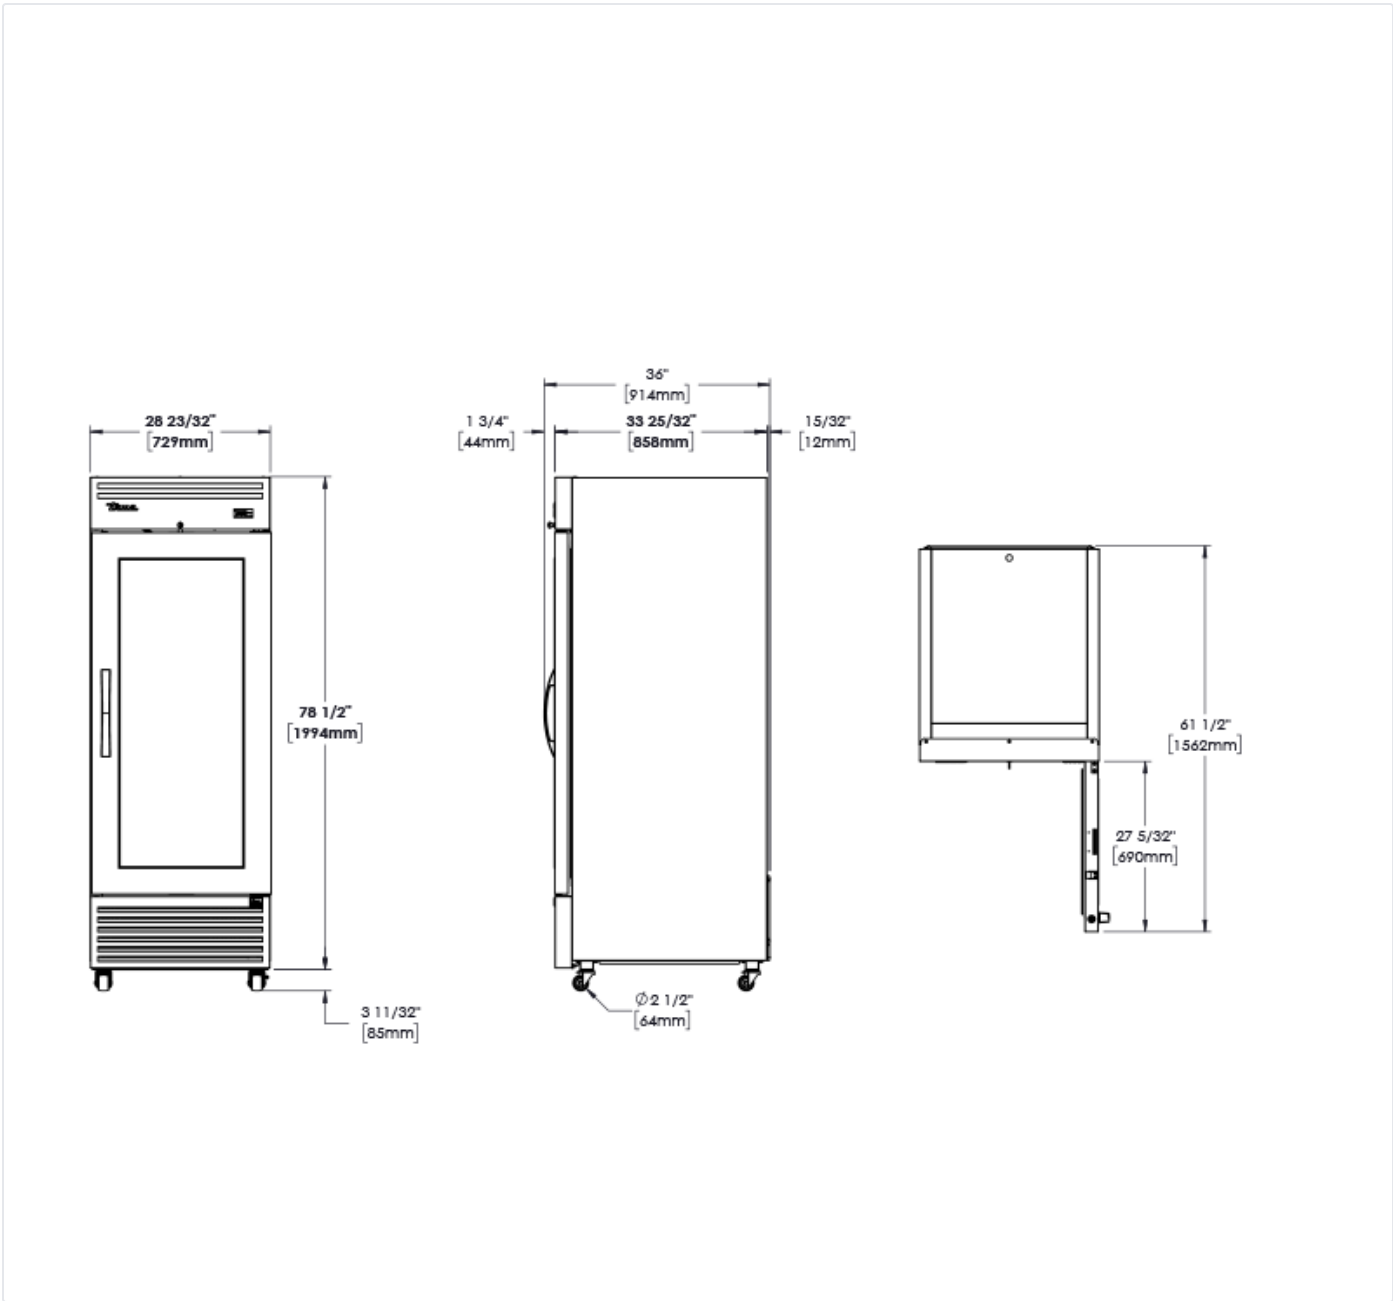

Specifications subject to change without notice.
Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")

UK & Ireland
EMEA
Australia

0800 783 2049
+41 61 563 07 05
+61 2 9619 9999

TFIUK@truemfg.com
TrueCHCustomerService@truemfg.com
TrueRefAus@truemfg.com

