



## PRODUCT DOCUMENT PACK

Prepared and distributed by KW Commercial Kitchen

### PRODUCT

**True T-11-HC RH Super Slimline Upright Foodservice Refrigerator, 1 Full Solid Swing Door**

**Model / SKU: T-11-HC RH**

#### KW COMMERCIAL KITCHEN

7/72 Canterbury Road, Bankstown NSW 2200

Phone 1300 001 366

Email [sales@kwcommercial.com.au](mailto:sales@kwcommercial.com.au)

Web [www.kwcommercial.com.au](http://www.kwcommercial.com.au)



Scan for the current KW product page

### DOCUMENT NOTICE

The supplier document begins on the next page. KW contact branding is added in a separate footer area and does not replace the supplier's instructions, specifications or warranty terms.

Official supplier source: <https://true-middleware.s3.eu-west-1.amazonaws.com/pdfs/aus/T-11-HC.pdf>

Upright Cabinets

T-11-HC

Super Slimline Upright Foodservice Refrigerator, 1 Full Solid Swing Door



| Dimensions                         |                                                         |
|------------------------------------|---------------------------------------------------------|
| External Width (mm)                | 487                                                     |
| External Depth (mm)                | 539                                                     |
| External Height (mm)               | 1855                                                    |
| Exclusions                         | Depth does not include 26mm for rear bumper.            |
| Net Volume (Litres)                | 186                                                     |
| Gross Volume (Litres)              | 311                                                     |
| Supplied Shelves                   | 4                                                       |
| Shelf Size (L x D mm)              | 375 x 394                                               |
| Internal Net Height (mm)           | 1300                                                    |
| Unpackaged Weight (kg)             | 75                                                      |
| Packaged Weight (kg)               | 86                                                      |
| Packaged Dimensions (W x D x H mm) | 699 x 737 x 1909                                        |
| Supplied with                      | Heavy duty lock-in-place ø 51 mm castors (71 mm height) |

| Build                 |                                               |
|-----------------------|-----------------------------------------------|
| Door Description      | 1 Solid Swing Door                            |
| Door Opening          | Right (standard) or Left                      |
| Exterior Construction | Stainless steel front, aluminium sides & rear |
| Interior Construction | Clear coated aluminium, stainless steel base  |
| Air Intake Position   | Front                                         |
| Ventilation Position  | Rear                                          |
| Clearance Required    | 26 mm rear, zero sides                        |
| Cord Length (Meters)  | 2.74                                          |
| Internal Lighting     | LED                                           |
| Standard w/ Locks     | Standard                                      |

| Technical                      |                                                                                    |
|--------------------------------|------------------------------------------------------------------------------------|
| Temperature Range              | 0.5 : 3.3°C                                                                        |
| Refrigerant                    | R290                                                                               |
| Voltage/Frequency/Phase        | 220-240V/50-60Hz/1                                                                 |
| Amps                           | 0.8                                                                                |
| Watts                          | 184                                                                                |
| Climate Class                  | 5                                                                                  |
| Operating Statement            | Heavy Duty: This appliance is intended for use in ambient temperatures up to 40°C. |
| Test Standard                  | EN 16825                                                                           |
| EEC                            | C                                                                                  |
| Energy Efficiency Index        | 47.6                                                                               |
| Defrost Type                   | Auto                                                                               |
| Energy Consumption (kWh/24h)   | 1.19                                                                               |
| Energy Consumption (kWh/Annum) | 435                                                                                |



Specifications subject to change without notice.  
Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")

UK & Ireland  
EMEA  
Australia



[0800 783 2049](tel:08007832049)  
[+41 61 563 07 05](tel:+61615630705)  
[+61 2 9619 9999](tel:+61296199999)

[TFIUK@truemfg.com](mailto:TFIUK@truemfg.com)  
[TrueCHCustomerService@truemfg.com](mailto:TrueCHCustomerService@truemfg.com)  
[TrueRefAus@truemfg.com](mailto:TrueRefAus@truemfg.com)



T-11-HC

Super Slimline Upright Foodservice Refrigerator, 1 Full Solid Swing Door

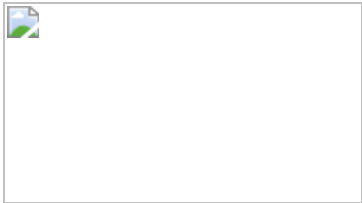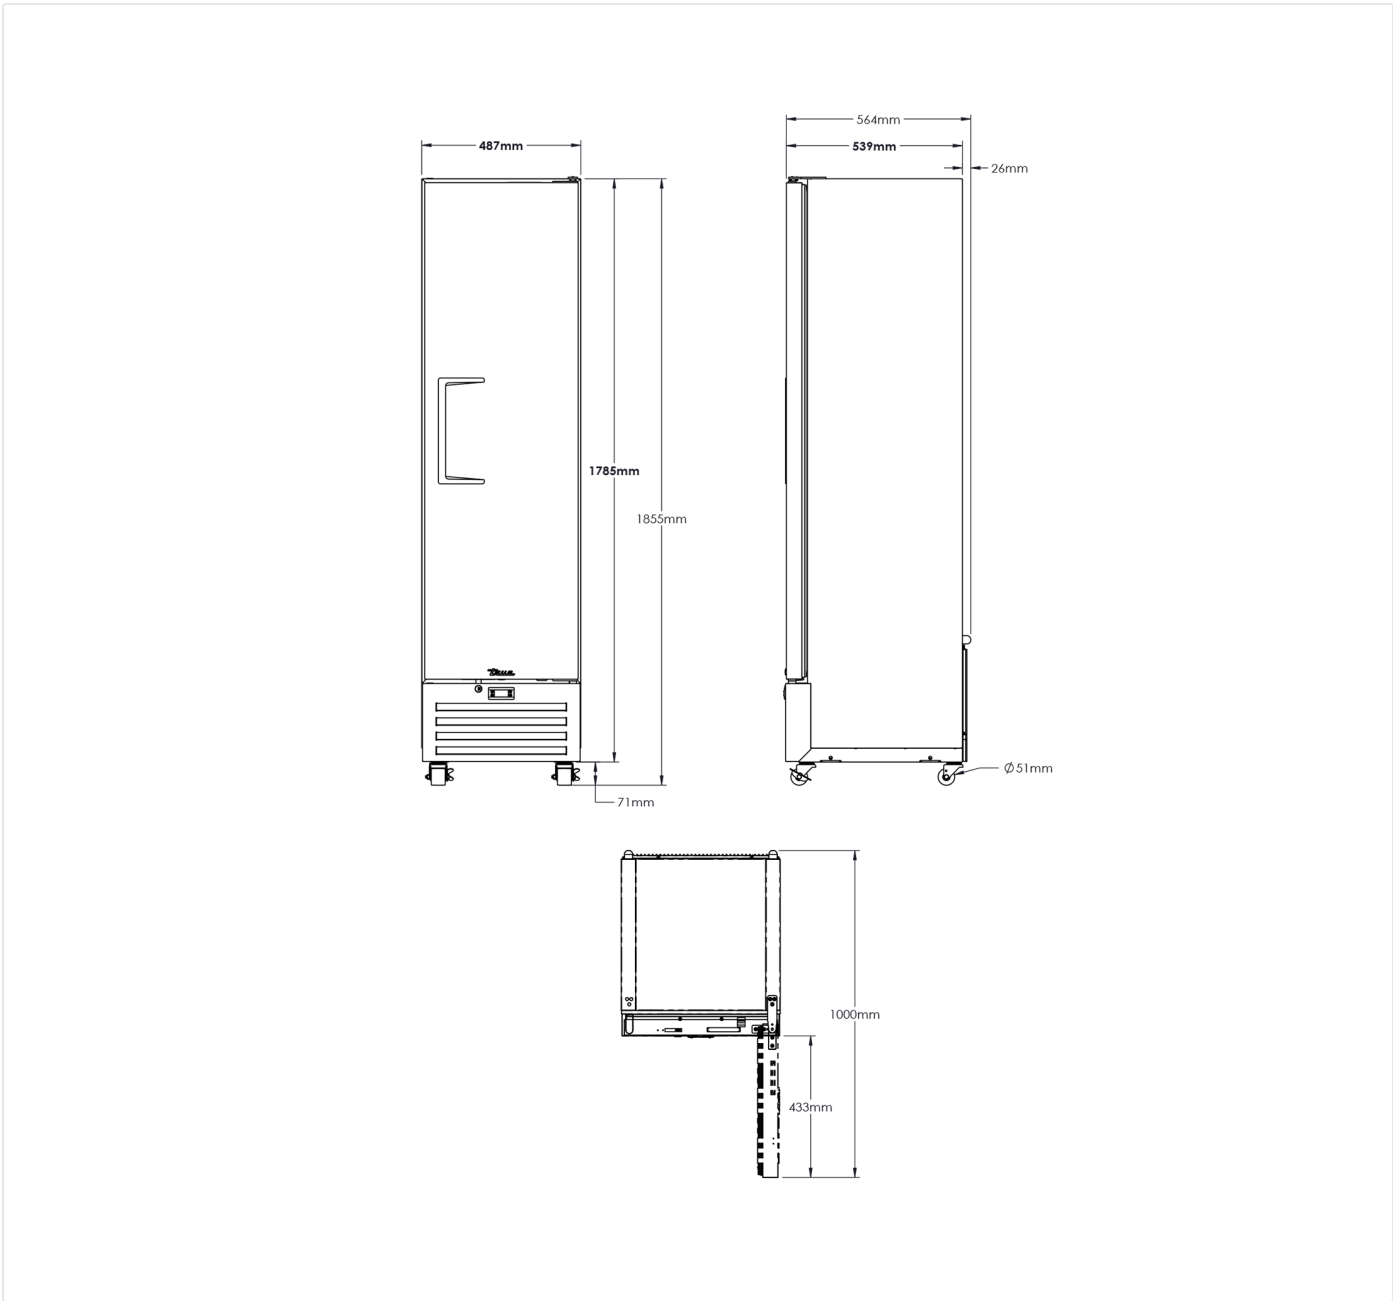

Specifications subject to change without notice.  
Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")

UK & Ireland  
EMEA  
Australia

[0800 783 2049](tel:08007832049)  
[+41 61 563 07 05](tel:+41615630705)  
[+61 2 9619 9999](tel:+61296199999)

[TFIUK@truemfg.com](mailto:TFIUK@truemfg.com)  
[TrueCHCustomerService@truemfg.com](mailto:TrueCHCustomerService@truemfg.com)  
[TrueRefAus@truemfg.com](mailto:TrueRefAus@truemfg.com)

