



## PRODUCT DOCUMENT PACK

Prepared and distributed by KW Commercial Kitchen

### PRODUCT

## True T-23-2-HC Upright Foodservice Refrigerator, 2 Half Solid Swing Doors

**Model / SKU: T-23-2-HC**

### KW COMMERCIAL KITCHEN

7/72 Canterbury Road, Bankstown NSW 2200

Phone 1300 001 366

Email [sales@kwcommercial.com.au](mailto:sales@kwcommercial.com.au)

Web [www.kwcommercial.com.au](http://www.kwcommercial.com.au)



Scan for the current KW product page

### DOCUMENT NOTICE

The supplier document begins on the next page. KW contact branding is added in a separate footer area and does not replace the supplier's instructions, specifications or warranty terms.

Official supplier source: <https://true-middleware.s3.eu-west-1.amazonaws.com/pdfs/aus/T-23-2-HC.pdf>

Upright Cabinets

# T-23-2-HC


Upright Foodservice Refrigerator, 2 Half Solid Swing Doors



| Dimensions                         |                                                         |
|------------------------------------|---------------------------------------------------------|
| External Width (mm)                | 686                                                     |
| External Depth (mm)                | 750                                                     |
| External Height (mm)               | 2074                                                    |
| Exclusions                         | Depth does not include 13 mm for rear access panel.     |
| Net Volume (Litres)                | 438                                                     |
| Gross Volume (Litres)              | 651                                                     |
| Supplied Shelves                   | 4                                                       |
| Shelf Size (L x D mm)              | 582 x 591                                               |
| Internal Net Height (mm)           | 1300                                                    |
| Unpackaged Weight (kg)             | 114                                                     |
| Packaged Weight (kg)               | 125                                                     |
| Packaged Dimensions (W x D x H mm) | 909 x 788 x 2134                                        |
| Supplied with                      | Heavy duty lock-in-place ø 64 mm castors (83 mm height) |

| Build                 |                                               |
|-----------------------|-----------------------------------------------|
| Door Description      | 2 Half Solid Swing Doors                      |
| Door Opening          | Right (standard) or Left                      |
| Exterior Construction | Stainless steel front, aluminium sides & rear |
| Interior Construction | Clear coated aluminium, stainless steel base  |
| Air Intake Position   | Front                                         |
| Ventilation Position  | Rear                                          |
| Clearance Required    | 26 mm rear, zero sides                        |
| Cord Length (Meters)  | 2.74                                          |
| Internal Lighting     | LED                                           |
| Standard w/ Locks     | Standard                                      |

| Technical                      |                                                                                    |
|--------------------------------|------------------------------------------------------------------------------------|
| Temperature Range              | 0.5 : 3.3°C                                                                        |
| Refrigerant                    | R290                                                                               |
| Voltage/Frequency/Phase        | 220-240V/50-60Hz/1                                                                 |
| Amps                           | 1.3                                                                                |
| Watts                          | 299                                                                                |
| Climate Class                  | 5                                                                                  |
| Operating Statement            | Heavy Duty: This appliance is intended for use in ambient temperatures up to 40°C. |
| Test Standard                  | EN 16825                                                                           |
| EEC                            | C                                                                                  |
| Energy Efficiency Index        | 36.8                                                                               |
| Defrost Type                   | Auto                                                                               |
| Energy Consumption (kWh/24h)   | 1.34                                                                               |
| Energy Consumption (kWh/Annum) | 489                                                                                |




UK & Ireland  
EMEA  
Australia



0800 783 2049  
[+61 61 563 07 05](tel:+61615630705)  
[+61 2 9619 9999](tel:+61296199999)

[TFIUK@truemfg.com](mailto:TFIUK@truemfg.com)  
[TrueCHCustomerService@truemfg.com](mailto:TrueCHCustomerService@truemfg.com)  
[TrueRefAus@truemfg.com](mailto:TrueRefAus@truemfg.com)



Specifications subject to change without notice.  
Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")




Upright Cabinets

# T-23-2-HC

Upright Foodservice Refrigerator, 2 Half Solid Swing Doors

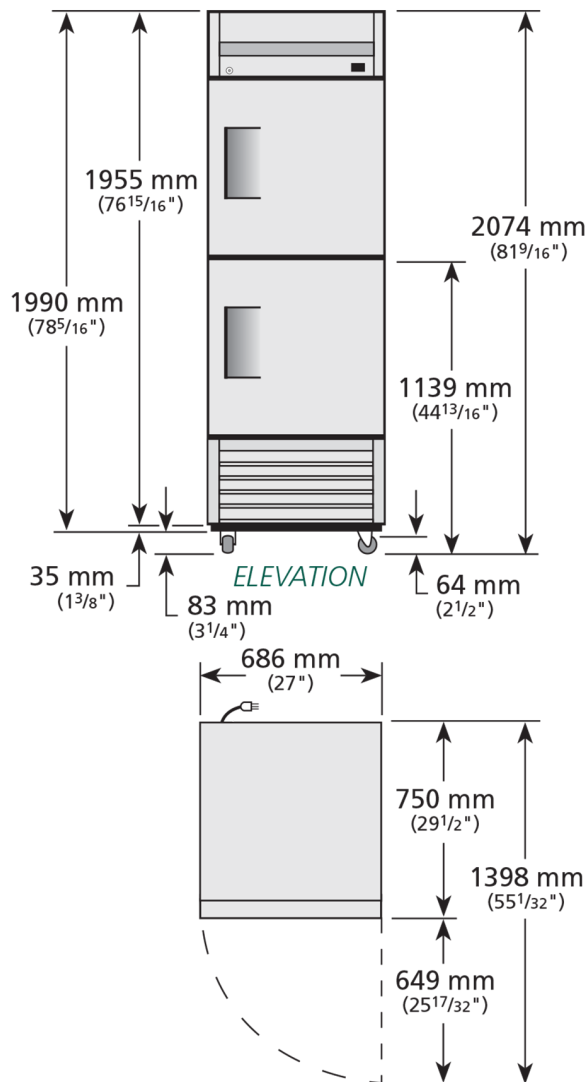

UK & Ireland  
EMEA  
Australia

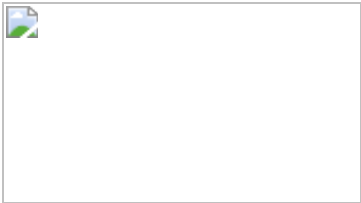

0800 783 2049  
+41 61 563 07 05  
+61 2 9619 9999

TFIUK@truemfg.com  
TrueCHCustomerService@truemfg.com  
TrueRefAus@truemfg.com

Specifications subject to change without notice.  
Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")

