



PRODUCT DOCUMENT PACK

Prepared and distributed by KW Commercial Kitchen

PRODUCT

True T-23G-PT-HC-FGD011G-1G Upright "Pass-Thru" Display Refrigerator, 1 Glass Door F

Model / SKU: T-23G-PT-HC-FGD011G-1G

KW COMMERCIAL KITCHEN

7/72 Canterbury Road, Bankstown NSW 2200

Phone 1300 001 366

Email sales@kwcommercial.com.au

Web www.kwcommercial.com.au



Scan for the current KW product page

DOCUMENT NOTICE

The supplier document begins on the next page. KW contact branding is added in a separate footer area and does not replace the supplier's instructions, specifications or warranty terms.

Official supplier source: <https://true-middleware.s3.eu-west-1.amazonaws.com/pdfs/aus/T-23G-PT-HC-FGD01-1G-1G.pdf>

Upright Cabinets

T-23G-PT-HC~FGD01 1G-1G


Upright "Pass-Thru" Display Refrigerator, 1 Glass Door Front, 1 Glass Door Rear



Dimensions	
External Width (mm)	686
External Depth (mm)	818
External Height (mm)	2074
Exclusions	Depth does not include 46 mm for front door handle or 46 mm for rear door handle.
Net Volume (Litres)	438
Gross Volume (Litres)	651
Display Area (m²)	1.38
Supplied Shelves	4
Shelf Size (L x D mm)	582 x 591
Internal Net Height (mm)	1300
Unpackaged Weight (kg)	146
Packaged Weight (kg)	157
Packaged Dimensions (W x D x H mm)	909 x 788 x 2134
Supplied with	Heavy duty lock-in-place ø 64 mm castors (83 mm height)

Build	
Door Description	1 Glass Door Front + 1 Glass Door Rear
Door Opening	Right (standard) or Left
Exterior Construction	Stainless steel front and rear, aluminium sides
Interior Construction	Clear coated aluminium, stainless steel base
Air Intake Position	Front
Ventilation Position	Rear
Clearance Required	26 mm rear, zero sides
Cord Length (Meters)	2.74
Internal Lighting	LED
Standard w/ Locks	Standard

Technical	
Temperature Range	0.5 : 3.3°C
Refrigerant	R290
Voltage/Frequency/Phase	220-240V/50-60Hz/1
Amps	1.3
Watts	299
Temperature Class	M1
Operating Statement	Tested at 25°C, 60% RH, per 'Refrigerators with a Direct Sales Function' for perishable food merchandising.
Test Standard	EN 23953
EEC	A
Energy Efficiency Index	8.3
Defrost Type	Auto
Energy Consumption (kWh/24h)	2.278
Energy Consumption (kWh/Annum)	831

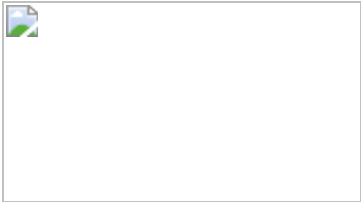


Specifications subject to change without notice.
Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")

UK & Ireland
EMEA
Australia



0800 783 2049
[+41 61 563 07 05](tel:+41615630705)
[+61 2 9619 9999](tel:+61296199999)

TFIUK@truemfg.com
TrueCHCustomerService@truemfg.com
TrueRefAus@truemfg.com



T-23G-PT-HC~FGD01 1G-1G

Upright "Pass-Thru" Display Refrigerator, 1 Glass Door Front, 1 Glass Door Rear

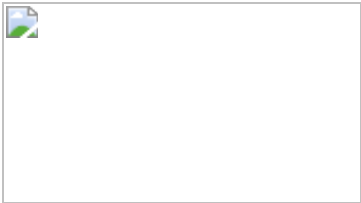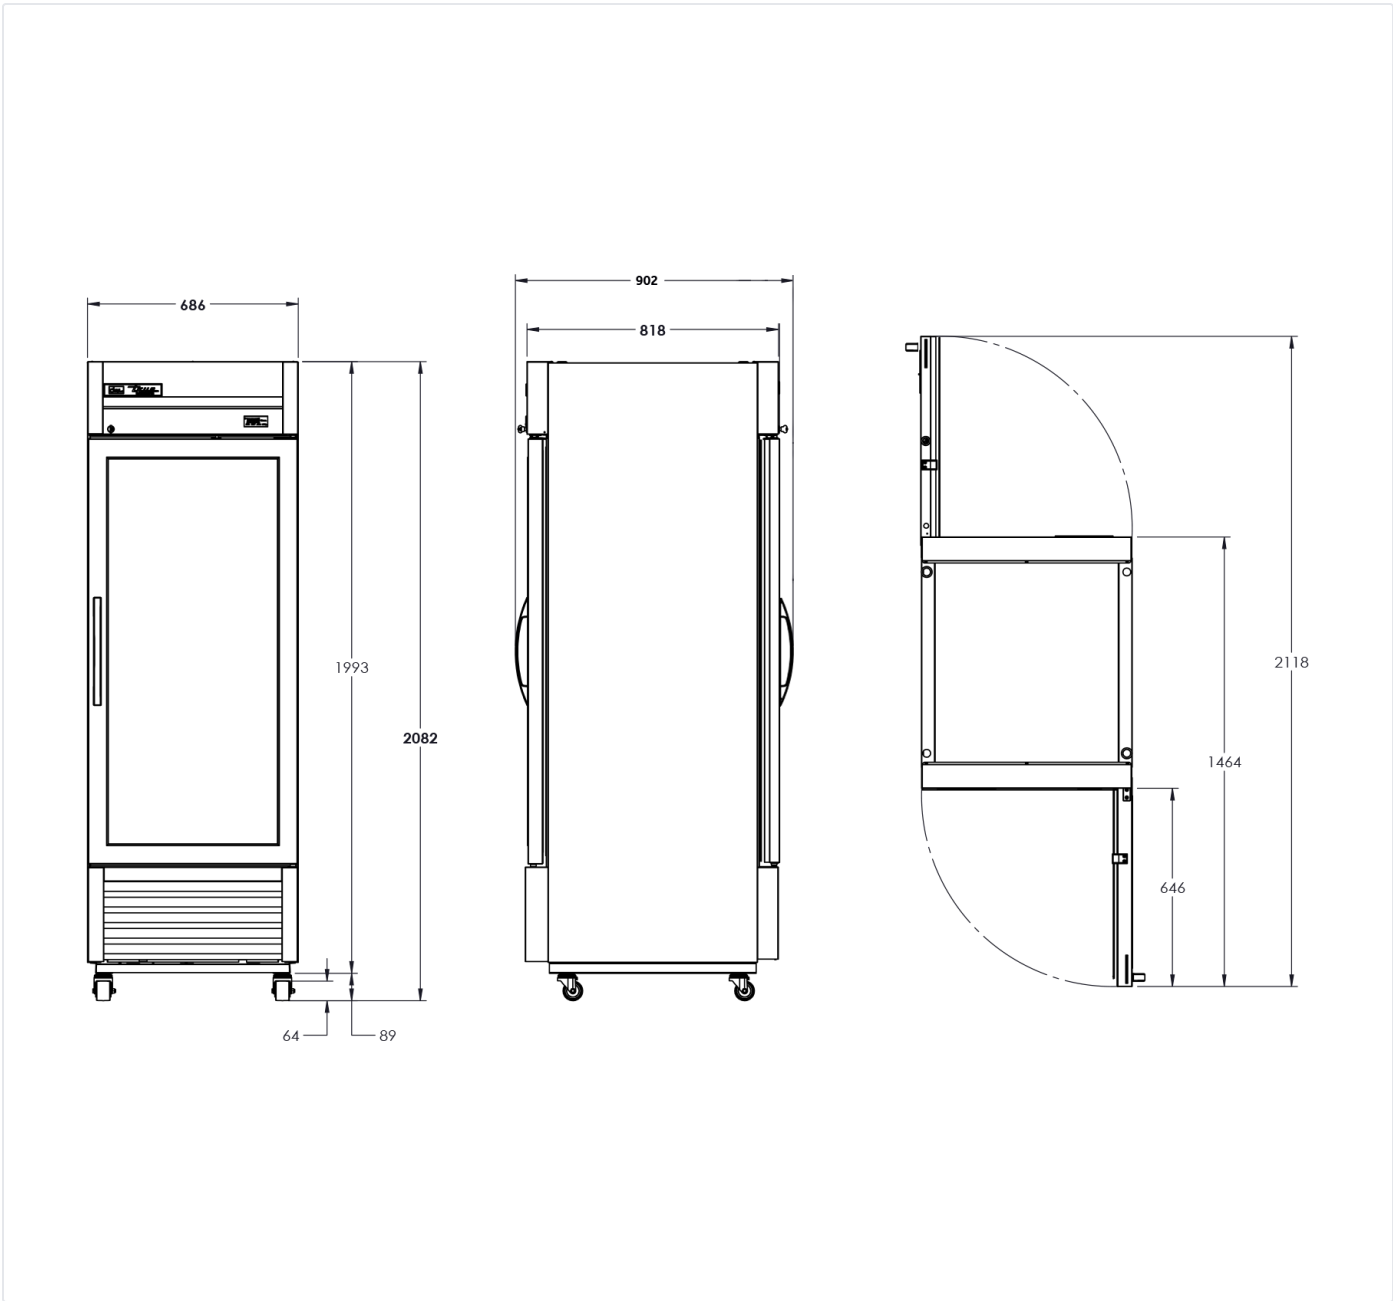

Specifications subject to change without notice.
Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")

UK & Ireland
EMEA
Australia

0800 783 2049
+41 61 563 07 05
+61 2 9619 9999

TFIUK@truemfg.com
TrueCHCustomerService@truemfg.com
TrueRefAus@truemfg.com

