



PRODUCT DOCUMENT PACK

Prepared and distributed by KW Commercial Kitchen

PRODUCT

True TSSU-72-24M-B-ST-HC FLID Prep Table, 24x 1/6 Top Pans, 3 Solid Swing Doors, Ren

Model / SKU: TSSU-72-24M-B-ST-HC FLID

KW COMMERCIAL KITCHEN

7/72 Canterbury Road, Bankstown NSW 2200

Phone 1300 001 366

Email sales@kwcommercial.com.au

Web www.kwcommercial.com.au



Scan for the current KW product page

DOCUMENT NOTICE

The supplier document begins on the next page. KW contact branding is added in a separate footer area and does not replace the supplier's instructions, specifications or warranty terms.

Official supplier source: <https://true-middleware.s3.eu-west-1.amazonaws.com/pdfs/aus/TSSU-72-24M-B-ST-HC-FLID.pdf>

TSSU-72-24M-B-ST-HC FLID

Prep Table, 24x 1/6 Top Pans, 3 Solid Swing Doors, Removable lids




Dimensions	
External Width (mm)	1839
External Depth (mm)	867
External Height (mm)	961
Exclusions	Depth does not include 26 mm for rear bumpers. Height with lid closed.
Gross Volume (Litres)	538
Supplied Shelves	6
Shelf Size (L x D mm)	Left & Right Upper: 547 x 514. Central Upper: 596 x 539. Left & Right Lower: 547 x 349. Central Lower: 596 x 349
Internal Net Height (mm)	535
Top Pans Supplied (depth mm)	24x 1/6 GN (100)
Unpackaged Weight (kg)	196
Packaged Weight (kg)	207
Packaged Dimensions (W x D x H mm)	1931 x 940 x 1270
Cutting Board (L x D mm)	1893 x 226
Supplied with	Heavy duty lock-in-place ø 127 mm castors (158 mm height)

Build	
Door Description	3 Solid Swing Doors
Exterior Construction	Stainless steel front, top & lids, aluminium sides and rear
Interior Construction	Clear coated aluminium, stainless steel base
Air Intake Position	Front
Ventilation Position	Front
Clearance Required	Zero back and sides
Cord Length (Meters)	3.35
Standard w/ Locks	Not Standard (SPEC3 option)

Technical	
Temperature Range	0.5 : 5°C
Refrigerant	R290
Voltage/Frequency/Phase	220-240V/50Hz/1
Amps	3.1
Watts	713
Defrost Type	Auto



UK & Ireland
EMEA
Australia

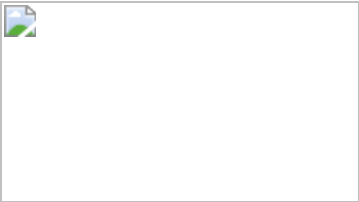

0800 783 2049
+41 61 563 07 05
+61 2 9619 9999


TFIUK@truemfg.com
TrueCHCustomerService@truemfg.com
TrueRefAus@truemfg.com

Specifications subject to change without notice.
Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")



TSSU-72-24M-B-ST-HC FLID

Prep Table, 24x 1/6 Top Pans, 3 Solid Swing Doors, Removable lids

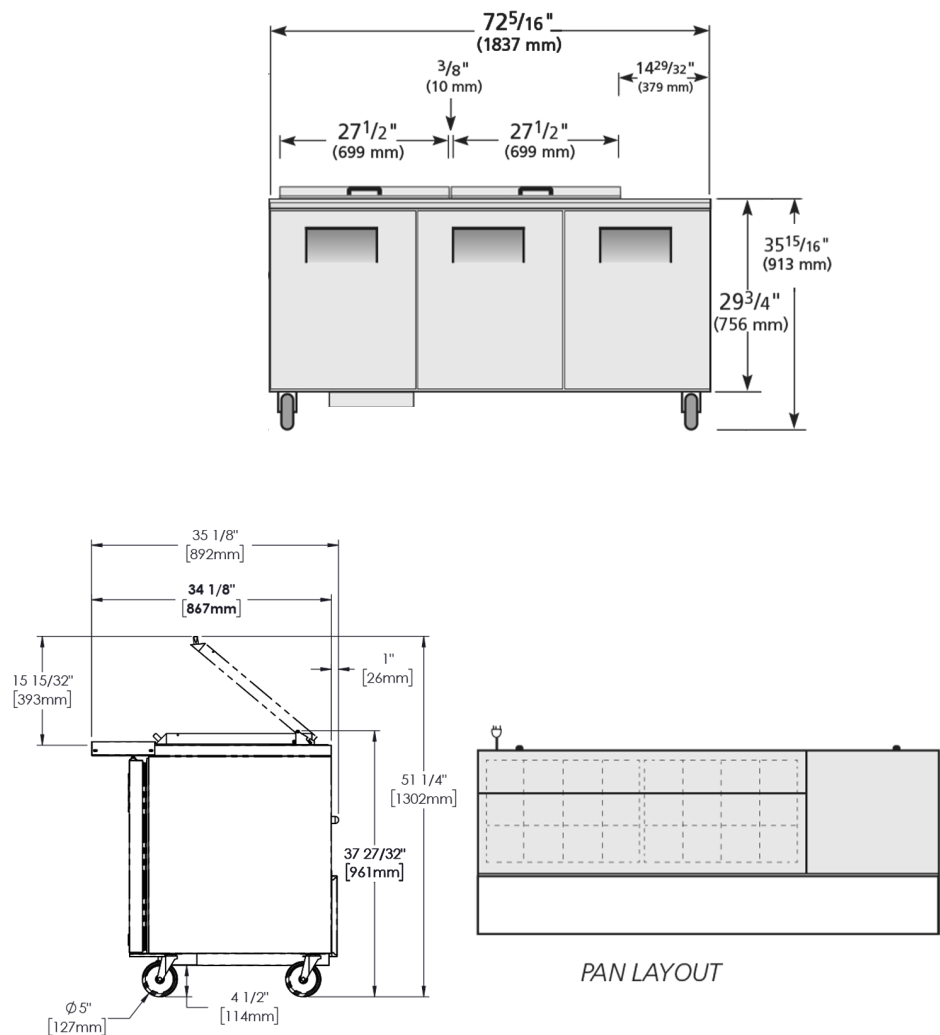

Specifications subject to change without notice.
Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")

UK & Ireland
EMEA
Australia

0800 783 2049
+41 61 563 07 05
+61 2 9619 9999

TFIUK@truemfg.com
TrueCHCustomerService@truemfg.com
TrueRefAus@truemfg.com