



PRODUCT DOCUMENT PACK

Prepared and distributed by KW Commercial Kitchen

PRODUCT

True TSSU-60-24M-B-DS-ST-HC Dual-Sided Prep Table, 24x 1/6 Top Pans, 2 Solid Swing D

Model / SKU: TSSU-60-24M-B-DS-ST-HC

KW COMMERCIAL KITCHEN

7/72 Canterbury Road, Bankstown NSW 2200

Phone 1300 001 366

Email sales@kwcommercial.com.au

Web www.kwcommercial.com.au



Scan for the current KW product page

DOCUMENT NOTICE

The supplier document begins on the next page. KW contact branding is added in a separate footer area and does not replace the supplier's instructions, specifications or warranty terms.

Official supplier source: <https://true-middleware.s3.eu-west-1.amazonaws.com/pdfs/aus/TSSU-60-24M-B-DS-ST-HC.pdf>

TSSU-60-24M-B-DS-ST-HC

Dual-Sided Prep Table, 24x 1/6 Top Pans, 2 Solid Swing Doors




Dimensions	
External Width (mm)	1534
External Depth (mm)	1026
External Height (mm)	956
Exclusions	Depth does not include 80 mm each side for the two cutting boards. Width does not include 7 mm each side for cutting board brackets.
Gross Volume (Litres)	439
Supplied Shelves	4
Shelf Size (L x D mm)	Two 700 x 546 + Two 700 x 349
Internal Net Height (mm)	535
Top Pans Supplied (depth mm)	24x 1/6 GN (100)
Unpackaged Weight (kg)	180
Packaged Weight (kg)	191
Packaged Dimensions (W x D x H mm)	1601 x 1105 x 1270
Cutting Board (L x D mm)	1534 x 299
Supplied with	Heavy duty lock-in-place ø 127 mm castors (158 mm height)

Build	
Door Description	2 Solid Swing Doors
Exterior Construction	Stainless steel front, top & lids, aluminium sides and rear
Interior Construction	Clear coated aluminium, stainless steel base
Air Intake Position	Front
Ventilation Position	Front
Clearance Required	Zero back and sides
Cord Length (Meters)	3.35
Standard w/ Locks	Not Standard (SPEC3 option)

Technical	
Temperature Range	0.5 : 5°C
Refrigerant	R290
Voltage/Frequency/Phase	220-240V/50-60Hz/1
Amps	2.2
Watts	506
Defrost Type	Auto



UK & Ireland
EMEA
Australia

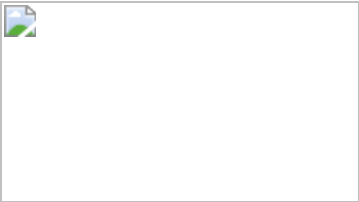

0800 783 2049
+41 61 563 07 05
+61 2 9619 9999


TFIUK@truemfg.com
TrueCHCustomerService@truemfg.com
TrueRefAus@truemfg.com

Specifications subject to change without notice.
Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")



TSSU-60-24M-B-DS-ST-HC

Dual-Sided Prep Table, 24x 1/6 Top Pans, 2 Solid Swing Doors

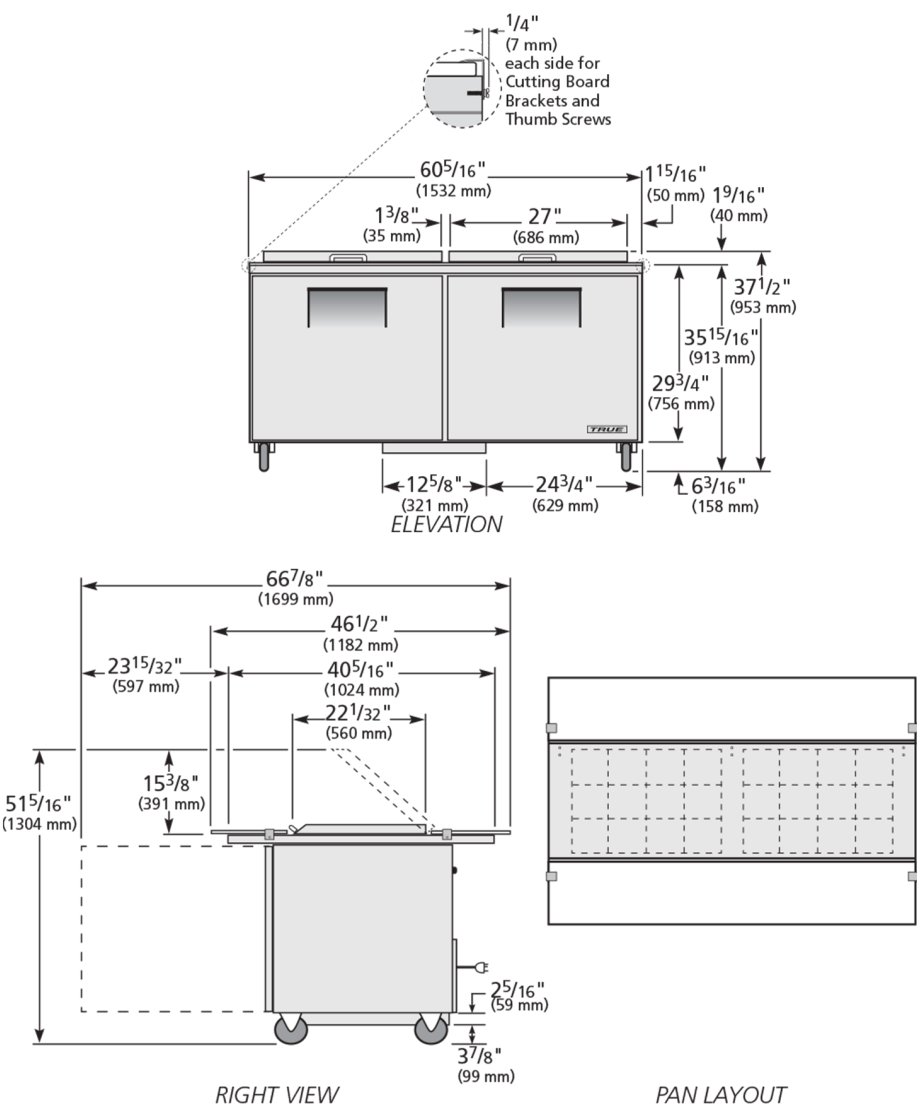

Specifications subject to change without notice.
Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")

UK & Ireland
EMEA
Australia

0800 783 2049
+41 61 563 07 05
+61 2 9619 9999

TFIUK@truemfg.com
TrueCHCustomerService@truemfg.com
TrueRefAus@truemfg.com