



PRODUCT DOCUMENT PACK

Prepared and distributed by KW Commercial Kitchen

PRODUCT

True GDM-41CPT-48-HC-LD Low-Height Narrow-Depth Pass-Through Glass Door Merch

Model / SKU: GDM-41CPT-48-HC-LD

KW COMMERCIAL KITCHEN

7/72 Canterbury Road, Bankstown NSW 2200

Phone 1300 001 366

Email sales@kwcommercial.com.au

Web www.kwcommercial.com.au



Scan for the current KW product page

DOCUMENT NOTICE

The supplier document begins on the next page. KW contact branding is added in a separate footer area and does not replace the supplier's instructions, specifications or warranty terms.

Official supplier source: <https://true-middleware.s3.eu-west-1.amazonaws.com/pdfs/aus/GDM-41CPT-48-HC-LD.pdf>

Glass Door Display

GDM-41CPT-48-HC-LD

Glass Door Merchandiser: Slide Door Lower Height Narrow Depth Fast Lane Pass-Thru Refrigerator with R290 Refrigerant and LED Light



Dimensions	
External Width (mm)	1220
External Depth (mm)	613
External Height (mm)	1220
Exclusions	Depth does not include 23 mm each side for door handles.
Net Volume (Litres)	-
Gross Volume (Litres)	395
Display Area (m²)	1.5
Supplied Shelves	6
Shelf Size (L x D mm)	524 x 417
Internal Net Height (mm)	762
Unpackaged Weight (kg)	167
Packaged Weight (kg)	179
Packaged Dimensions (W x D x H mm)	1296 x 999 x 1344
Supplied with	Leg Levelers. Additional Option: 2-1/2" (64mm) Diameter Castors available.

Build	
Door Description	2 Front/2 Back Low-E, Double Pane Thermal Insulated Glass Slide Doors
Exterior Construction	Black Powder Coated Cold Rolled Steel
Interior Construction	White Aluminum Interior Liner with Stainless Steel Floor
Air Intake Position	Front
Ventilation Position	Rear
Clearance Required	26 mm rear, zero sides
Cord Length (Meters)	2.74
Internal Lighting	LED
Standard w/ Locks	Not Standard. Optional: Barrel /Ratchet Locks

Technical	
Temperature Range	0.5 : 3.3°C
Refrigerant	R290
Voltage/Frequency/Phase	220-240V/50-60Hz/1
Amps	1.6
Watts	341
Climate Class	3
Operating Statement	Tested at 25°C, 60% RH, per 'Refrigerators with a Direct Sales Function' for perishable food merchandising.
Test Standard	EN ISO 23953-2:2023
EEC	A
Energy Efficiency Index	10
Defrost Type	Auto
Energy Consumption (kWh/24h)	2.87
Energy Consumption (kWh/Annum)	1048
Temperature Class	M1




UK & Ireland
EMEA
Australia



0800 783 2049
+41 61 563 07 05
+61 2 9619 9999



TFIUK@truemfg.com
TrueCHCustomerService@truemfg.com
TrueRefAus@truemfg.com

Specifications subject to change without notice.
Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")



GDM-41CPT-48-HC-LD

Glass Door Merchandiser: Slide Door Lower Height Narrow Depth Fast Lane Pass-Thru Refrigerator with R290 Refrigerant and LED Light

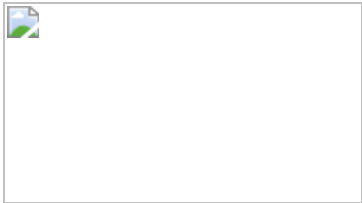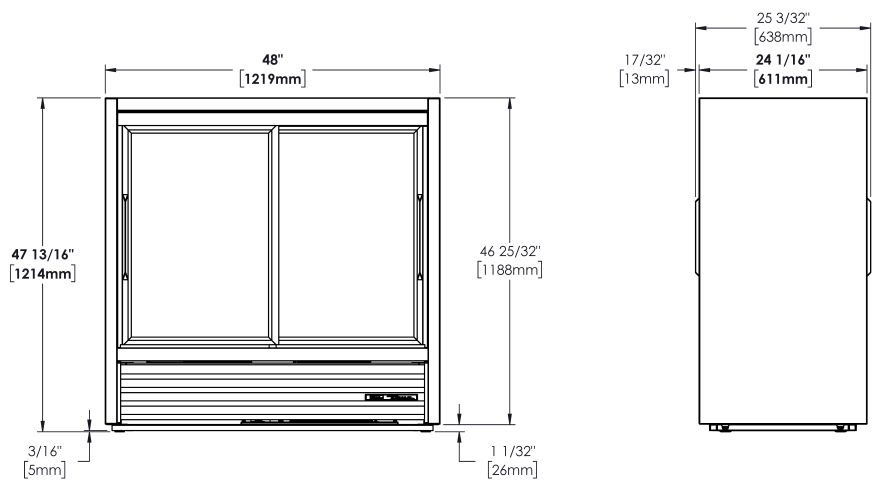

Specifications subject to change without notice.
Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")

UK & Ireland
EMEA
Australia

0800 783 2049
+41 61 563 07 05
+61 2 9619 9999

TFIUK@truemfg.com
TrueCHCustomerService@truemfg.com
TrueRefAus@truemfg.com

