



PRODUCT DOCUMENT PACK

Prepared and distributed by KW Commercial Kitchen

PRODUCT

True TBR48-RISZ1-L-B-GG-2 Bar Refrigerator, Black Ext, 2 Glass Swing Doors

Model / SKU: TBR48-RISZ1-L-B-GG-2

KW COMMERCIAL KITCHEN

7/72 Canterbury Road, Bankstown NSW 2200

Phone 1300 001 366

Email sales@kwcommercial.com.au

Web www.kwcommercial.com.au



Scan for the current KW product page

DOCUMENT NOTICE

The supplier document begins on the next page. KW contact branding is added in a separate footer area and does not replace the supplier's instructions, specifications or warranty terms.

Official supplier source: <https://true-middleware.s3.eu-west-1.amazonaws.com/pdfs/aus/TBR48-RISZ1-L-B-GG-2.pdf>

Bar Refrigeration

TBR48-RISZ1-L-B-GG-2


Bar Refrigerator, Black Ext, 2 Glass Swing Doors



Dimensions	
External Width (mm)	1219
External Depth (mm)	631
External Height (mm)	881
Exclusions	Depth does not include 35 mm for door handle. Height does not include 7 mm for leg levelers.
Gross Volume (Litres)	440
Supplied Shelves	6
Shelf Size (L x D mm)	394 x 458
Internal Net Height (mm)	730
Unpackaged Weight (kg)	141
Packaged Weight (kg)	152
Packaged Dimensions (W x D x H mm)	1397 x 724 x 1067
Supplied with	Levelling Screws. Optional castors sold seperately.

Build	
Door Description	2 Full Glass Swing Doors
Exterior Construction	Black powder coated steel front. Matching black coated Aluminium sides & rear. Stainless steel countertop.
Interior Construction	Stainless Steel
Air Intake Position	Front
Ventilation Position	Front
Clearance Required	Zero back and sides
Cord Length (Meters)	3.04
Internal Lighting	TruLumina®
Standard w/ Locks	Standard

Technical	
Temperature Range	0.5 : 3.3°C
Refrigerant	R290
Voltage/Frequency/Phase	220-240V/50-60Hz/1
Amps	1.3
Watts	299
Defrost Type	Auto



UK & Ireland
EMEA
Australia



0800 783 2049
[+41 61 563 07 05](tel:+41615630705)
[+61 2 9619 9999](tel:+61296199999)

TFIUK@truemfg.com
TrueCHCustomerService@truemfg.com
TrueRefAus@truemfg.com

Specifications subject to change without notice.
Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")



Front View:

- Overall Width: 48" [1219]
- Door Opening: 14 9/32" [363] X 28 5/16" [719]
- Top Right Corner: 2 7/32" [56]
- Left Side Panel: 1 3/4" [44]
- Left Side Panel Height: 34 11/16" [881]
- Right Side Panel: 31 11/16" [805]
- Bottom Right Corner: 25 5/32" [20]
- Glass Door Viewing Area: 11 5/8" [295] X 25 11/16" [652]
- Bottom Left Corner: 11 19/32" [294]
- Bottom Middle: 17 5/8" [448]

Side View:

- Overall Depth: 10 31/32" [278]
- Power Cord Exit: 18 1/2" [470] X 19 7/16" [494]
- Bottom Right Corner: 6" [152]

Top View:

- Overall Width: 26 13/32" [670]
- Overall Depth: 24 27/32" [631]
- Left Side Panel: 20 3/4" [527]
- Left Side Panel Height: 30 27/32" [783]
- Access Opposite Condensing Unit: 3 15/16" [100]
- Bottom Left Corner: 22 3/4" [578]
- Bottom Middle: 24 21/32" [626]
- Bottom Right Corner: 4 5/16" [110]
- Drain Access: 4 11/32" [111]
- Right Side Panel: 18 3/4" [476]
- Overall Depth: 41 19/32" [1057]
- Bottom Right Corner: 16 3/4" [426]
- Overall Width: 32 13/32" [823]
- Radius: R16 31/32" [431]
- Left Side Panel: 1 3/8" [35]
- Left Side Panel Height: 4 31/32" [126]
- Top Left Corner: 16 3/4" [426]
- Top Middle: 7 3/4" [197]
- Top Right Corner: 16 3/4" [426]


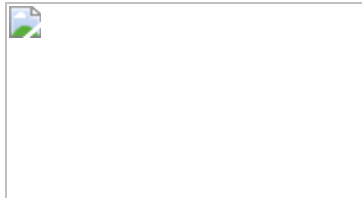


Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")

