



PRODUCT DOCUMENT PACK

Prepared and distributed by KW Commercial Kitchen

PRODUCT

True TBR60-RISZ1-L-B-GG-2 Bar Refrigerator, Black Ext, 2 Glass Swing Doors

Model / SKU: TBR60-RISZ1-L-B-GG-2

KW COMMERCIAL KITCHEN

7/72 Canterbury Road, Bankstown NSW 2200

Phone 1300 001 366

Email sales@kwcommercial.com.au

Web www.kwcommercial.com.au



Scan for the current KW product page

DOCUMENT NOTICE

The supplier document begins on the next page. KW contact branding is added in a separate footer area and does not replace the supplier's instructions, specifications or warranty terms.

Official supplier source: <https://true-middleware.s3.eu-west-1.amazonaws.com/pdfs/aus/TBR60-RISZ1-L-B-GG-2.pdf>

Bar Refrigeration

TBR60-RISZ1-L-B-GG-2

Bar Refrigerator, Black Ext, 2 Glass Swing Doors



Dimensions	
External Width (mm)	1524
External Depth (mm)	631
External Height (mm)	881
Exclusions	Depth does not include 35 mm for door handle. Height does not include 7 mm for leg levelers.
Gross Volume (Litres)	550
Supplied Shelves	6
Shelf Size (L x D mm)	551 x 458
Internal Net Height (mm)	730
Unpackaged Weight (kg)	166
Packaged Weight (kg)	177
Packaged Dimensions (W x D x H mm)	1690 x 724 x 1067
Supplied with	Levelling Screws. Optional castors sold seperately.

Build	
Door Description	2 Full Glass Swing Doors
Exterior Construction	Black powder coated steel front. Matching black coated Aluminium sides & rear. Stainless steel countertop.
Interior Construction	Stainless Steel
Air Intake Position	Front
Ventilation Position	Front
Clearance Required	Zero back and sides
Cord Length (Meters)	3.04
Internal Lighting	TruLumina®
Standard w/ Locks	Standard

Technical	
Temperature Range	0.5 : 3.3°C
Refrigerant	R290
Voltage/Frequency/Phase	220-240V/50-60Hz/1
Amps	1.3
Watts	299
Defrost Type	Auto



UK & Ireland
EMEA
Australia



0800 783 2049
+41 61 563 07 05
+61 2 9619 9999

TFIUK@truemfg.com
TrueCHCustomerService@truemfg.com
TrueRefAus@truemfg.com

Specifications subject to change without notice.
Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")



TBR60-RISZ1-L-B-GG-2

Technical drawings of the CryoChest 1000, showing dimensions in inches and millimeters.

Front View:

- Overall Width: 60" [1524]
- Door Opening: 20 9/32" [515] X 28 5/16" [719]
- Top Panel Height: 2 7/32" [56]
- Left Panel Height: 34 11/16" [881]
- Bottom Panel Height: 11 19/32" [294]
- Right Panel Height: 31 11/16" [805]
- Bottom Panel Width: 23 5/8" [600]
- Glass Door Viewing Area: 17 5/8" [448] X 25 11/16" [652]
- Bottom Panel Width (Right): 25 3/32" [20]

Side View:

- Overall Depth: 10 31/32" [278]
- Power Cord Exit: 18 1/2" [470]
- Bottom Panel Depth: 19 7/16" [494]
- Bottom Panel Width (Right): 6" [152]

Detail View (Left):

- Overall Width: 26 13/32" [670]
- Overall Height: 24 27/32" [631]
- Internal Width: 20 3/4" [527]
- Internal Height: 30 27/32" [783]
- Access Opposite Condensing Unit: ϕ 1" [25]
- Bottom Panel Width: 22 3/4" [578]
- Bottom Panel Height: 3 15/16" [100]
- Bottom Panel Width (Right): 4 5/16" [110]
- Overall Width (Right): 24 21/32" [626]

Detail View (Right):

- Floor Access: ϕ 2 1/4" [57]
- Top Panel Height: 16 3/4" [426]
- Bottom Panel Height: 1 3/8" [35]
- Bottom Panel Width (Left): 4 31/32" [126]
- Drain Access: ϕ 1" [25]
- Drain Access Height: 7 3/4" [197]
- Bottom Panel Height (Right): 18 3/4" [476]
- Bottom Panel Width (Right): 47 19/32" [1209]
- Bottom Panel Width (Right): 22 3/4" [578]
- Bottom Panel Width (Right): R22 31/32" [583]
- Overall Width (Right): 44 13/32" [1128]


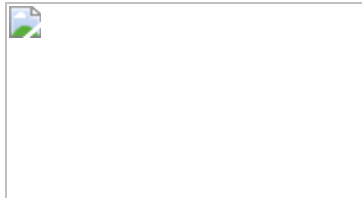


Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")

TFIUK@truemfg.com
TrueCHCustomerService@truemfg.com
TrueRefAus@truemfg.com

