



PRODUCT DOCUMENT PACK

Prepared and distributed by KW Commercial Kitchen

PRODUCT

True TBR72-RISZ1-L-B-GGG-2 Bar Refrigerator, Black Ext, 3 Glass Swing Doors

Model / SKU: TBR72-RISZ1-L-B-GGG-2

KW COMMERCIAL KITCHEN

7/72 Canterbury Road, Bankstown NSW 2200

Phone 1300 001 366

Email sales@kwcommercial.com.au

Web www.kwcommercial.com.au



Scan for the current KW product page

DOCUMENT NOTICE

The supplier document begins on the next page. KW contact branding is added in a separate footer area and does not replace the supplier's instructions, specifications or warranty terms.

Official supplier source: <https://true-middleware.s3.eu-west-1.amazonaws.com/pdfs/aus/TBR72-RISZ1-L-B-GGG-2.pdf>

Bar Refrigeration

TBR72-RISZ1-L-B-GGG-2


Bar Refrigerator, Black Ext, 3 Glass Swing Doors




Dimensions	
External Width (mm)	1829
External Depth (mm)	631
External Height (mm)	881
Exclusions	Depth does not include 35 mm for door handle. Height does not include 7 mm for leg levelers.
Gross Volume (Litres)	660
Supplied Shelves	9
Shelf Size (L x D mm)	450 x 458
Internal Net Height (mm)	730
Unpackaged Weight (kg)	194
Packaged Weight (kg)	205
Packaged Dimensions (W x D x H mm)	2007 x 724 x 1067
Supplied with	Levelling Screws. Optional castors sold seperately.

Build	
Door Description	3 Full Glass Swing Doors
Exterior Construction	Black powder coated steel front. Matching black coated Aluminium sides & rear. Stainless steel countertop.
Interior Construction	Stainless Steel
Air Intake Position	Front
Ventilation Position	Front
Clearance Required	Zero back and sides
Cord Length (Meters)	3.04
Internal Lighting	TruLumina®
Standard w/ Locks	Standard

Technical	
Temperature Range	0.5 : 3.3°C
Refrigerant	R290
Voltage/Frequency/Phase	220-240V/50-60Hz/1
Amps	1.3
Watts	299
Defrost Type	Auto




UK & Ireland
EMEA
Australia

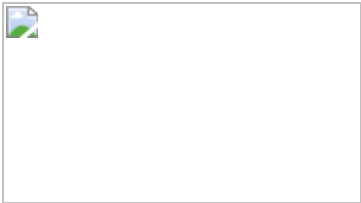

0800 783 2049
[+41 61 563 07 05](tel:+41615630705)
[+61 2 9619 9999](tel:+61296199999)

TFIUK@truemfg.com
TrueCHCustomerService@truemfg.com
TrueRefAus@truemfg.com

Specifications subject to change without notice.
Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")



TBR72-RISZ1-L-B-GGG-2

Technical drawings of the 3000 Series Condensing Unit showing front, side, and top views with dimensions in inches and millimeters.

Front View:

- Overall Width: 72" [1829]
- Overall Height: 34 11/16" [881]
- Door Opening: 16 9/32" [414] X 28 3/16" [716]
- Top Panel Height: 2 7/32" [56]
- Right Side Height: 31 11/16" [805]
- Bottom Panel Height: 25 3/32" [20]
- Glass Door Viewing Area: 13 5/8" [346] X 25 11/16" [652]
- Left Panel Height: 11 19/32" [294]
- Panel Spacing: 19 5/8" [498]

Side View:

- Overall Depth: 10 31/32" [278]
- Power Cord Exit Height: 18 1/2" [470]
- Top Panel Depth: 19 7/16" [494]
- Bottom Panel Depth: 6" [152]

Top View:

- Overall Width: 26 13/32" [670]
- Overall Depth: 24 27/32" [631]
- Left Panel Width: 20 3/4" [527]
- Left Panel Depth: 30 27/32" [783]
- Access Opposite Condensing Unit: ϕ 1" [25]
- Right Panel Width: 22 3/4" [578]
- Right Panel Depth: 24 21/32" [626]
- Panel Spacing: 3 15/16" [100]
- Bottom Panel Depth: 4 5/16" [110]

Bottom View:

- Overall Width: 56 13/32" [1433]
- Overall Depth: 43 19/32" [1107]
- Left Panel Width: 16 3/4" [426]
- Left Panel Depth: 7 3/4" [196]
- Right Panel Width: 18 3/4" [476]
- Right Panel Depth: 18 3/4" [476]
- Bottom Panel Depth: 18 3/4" [476]
- Drain Access: ϕ 1" [25]
- Drain Access Depth: 4 11/32" [111]
- Radius: R18 31/32" [482]



Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")

TFIUK@truemfg.com
TrueCHCustomerService@truemfg.com
TrueRefAus@truemfg.com

