



PRODUCT DOCUMENT PACK

Prepared and distributed by KW Commercial Kitchen

PRODUCT

True TDR48-RISZ1-L-B-SG-2 Keg Chiller / Dispenser, Black Ext, 1 Solid Swing Door + 1 GL

Model / SKU: TDR48-RISZ1-L-B-SG-2

KW COMMERCIAL KITCHEN

7/72 Canterbury Road, Bankstown NSW 2200

Phone 1300 001 366

Email sales@kwcommercial.com.au

Web www.kwcommercial.com.au



Scan for the current KW product page

DOCUMENT NOTICE

The supplier document begins on the next page. KW contact branding is added in a separate footer area and does not replace the supplier's instructions, specifications or warranty terms.

Official supplier source: <https://true-middleware.s3.eu-west-1.amazonaws.com/pdfs/aus/TDR48-RISZ1-L-B-SG-2.pdf>

TDR48-RISZ1-L-B-SG-2

Keg Chiller / Dispenser, Black Ext, 1 Solid Swing Door + 1 Glass Swing Door



Dimensions	
External Width (mm)	1219
External Depth (mm)	631
External Height (mm)	881
Exclusions	Depth does not include 35 mm for door handles. Height does not include 7 mm for leg levelers or 400 mm for draft tower.
Gross Volume (Litres)	440
Supplied Shelves	3
Shelf Size (L x D mm)	394 x 458
Internal Net Height (mm)	730
Unpackaged Weight (kg)	109
Packaged Weight (kg)	120
Packaged Dimensions (W x D x H mm)	1397 x 724 x 1067
Internal Capacity for Keg (L x D x H mm)	448 x 477 x 783
Supplied with	Draft tower and levelling screws. Optional castors sold separately.

Build	
Door Description	1 Solid Swing Door + 1 Glass Swing Door
Exterior Construction	Black powder coated steel front. Matching black coated Aluminium sides & rear. Stainless steel countertop.
Interior Construction	Stainless Steel
Air Intake Position	Front
Ventilation Position	Front
Clearance Required	Zero back and sides
Cord Length (Meters)	3.04
Internal Lighting	LED
Standard w/ Locks	Standard

Technical	
Temperature Range	0.5 : 3.3°C
Refrigerant	R290
Voltage/Frequency/Phase	220-240V/50-60Hz/1
Amps	1.3
Watts	299
Defrost Type	Auto



Specifications subject to change without notice.
Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")

UK & Ireland
EMEA
Australia

[0800 783 2049](tel:08007832049)
[+41 61 563 07 05](tel:+41615630705)
[+61 2 9619 9999](tel:+61296199999)

TFIUK@truemfg.com
TrueCHCustomerService@truemfg.com
TrueRefAus@truemfg.com



Technical drawings of the 1000 Series Condensing Unit showing front, side, and top views with dimensions in inches and millimeters.

Front View Dimensions:

- Overall Width: 48" [1219]
- Overall Height: 34 11/16" [881]
- Top Section Height: 15 3/4" [400]
- Door Opening Height: 27 7/32" [56]
- Door Opening Width: 14 9/32" [363] X 28 3/16" [716]
- Bottom Section Height: 11 19/32" [294]
- Bottom Section Width: 17 5/8" [448]
- Glass Door Viewing Area: 11 5/8" [295] X 25 11/16" [652]
- Door Opening Height (Internal): 31 11/16" [805]
- Door Opening Width (Internal): 25 3/32" [20]

Side View Dimensions:

- Overall Width: 10 31/32" [278]
- Overall Height: 18 1/2" [470]
- Power Cord Exit Height: 19 7/16" [494]
- Power Cord Exit Width: 6" [152]

Top View Dimensions:

- Overall Length: 26 13/32" [670]
- Overall Width: 24 27/32" [631]
- Top Section Width: 20 3/4" [527]
- Top Section Length: 30 27/32" [783]
- Top Section Width (Internal): 22 3/4" [578]
- Top Section Length (Internal): 3 15/16" [100]
- Top Section Width (Internal): 4 5/16" [110]
- Top Section Length (Internal): 24 21/32" [626]
- Top Section Width (Internal): 1 3/8" [35]
- Top Section Length (Internal): 4 31/32" [126]
- Top Section Width (Internal): 16 3/4" [426]
- Top Section Length (Internal): 21" [533]
- Top Section Width (Internal): 27" [686]
- Top Section Length (Internal): 7 3/4" [197]
- Top Section Width (Internal): 12 7/32" [310]
- Top Section Length (Internal): 18 3/4" [476]
- Top Section Width (Internal): 41 19/32" [1057]
- Top Section Length (Internal): 16 3/4" [426]
- Top Section Width (Internal): 32 13/32" [823]
- Top Section Length (Internal): R16 31/32" [431]
- Top Section Width (Internal): 1 3/8" [35]
- Top Section Length (Internal): 4 31/32" [126]
- Top Section Width (Internal): 16 3/4" [426]
- Top Section Length (Internal): 21" [533]
- Top Section Width (Internal): 27" [686]
- Top Section Length (Internal): 7 3/4" [197]
- Top Section Width (Internal): 12 7/32" [310]
- Top Section Length (Internal): 18 3/4" [476]
- Top Section Width (Internal): 41 19/32" [1057]
- Top Section Length (Internal): 16 3/4" [426]
- Top Section Width (Internal): 32 13/32" [823]
- Top Section Length (Internal): R16 31/32" [431]

Access Points:

- DOOR OPENING
- POWER CORD EXIT
- Glass Door Viewing Area
- ACCESS OPPOSITE CONDENSING UNIT
- FLOOR ACCESS
- DRAIN ACCESS


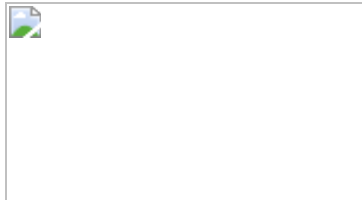


Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")

TFIUK@truemfg.com
TrueCHCustomerService@truemfg.com
TrueRefAus@truemfg.com

