



PRODUCT DOCUMENT PACK

Prepared and distributed by KW Commercial Kitchen

PRODUCT

Anets AGP75D Gas Fryer – 31-39 Litre Capacity - Digital Control

Model / SKU: AGP75D

KW COMMERCIAL KITCHEN

7/72 Canterbury Road, Bankstown NSW 2200

Phone 1300 001 366

Email sales@kwcommercial.com.au

Web www.kwcommercial.com.au



Scan for the current KW product page

DOCUMENT NOTICE

The supplier document begins on the next page. KW contact branding is added in a separate footer area and does not replace the supplier's instructions, specifications or warranty terms.

agp75d b2 datasheet

SKU: AGP75D

Distributed by KW Commercial - kwcommercial.com.au

Manufacturer documentation - (c) Anets

Retrieved: 2026-07-08

<https://www.kwcommercial.com.au/product/anets-platinum-agp75d-gas-fryer-39l-digital-control>



The Platinum series gas fryer are high efficiency fryers that deliver optimum performance while using minimal gas. Platinum fryers are supplied standard with Anets Platinum burner technology incorporating a highly efficient Energy Star® rated atmospheric burner recovery up to 70% thermal efficiency and lower flue temperatures. The patented burner incorporates a daily self-cleaning cycle, keeping burners tuned to operate in the most energy efficient manner.

Product Information:

- 5 x 102mm deep tube burners
- Energy Star® rated Platinum tube burners
- Tank - Stainless steel construction
- Cabinet - Stainless steel front, door & sides
- 4 channel digital control is standard on all Anets Platinum fryers with melt cycle and boil out modes. Complete with backup solidstate controller which can be switched on should the digital control fail.
- Cooking capacity of approximately 60kg of frozen 10mm fries / 70kg of frozen french cut fries per hour
- Supplied with 3 x 140mm wide nickle plated wire fryer baskets, removable stainless steel basket support, lid, drain pipe extension & clean out rod
- 10 year warranty on stainless steel frypot

OPTIONAL EXTRAS:

- Fish plate alternative
- Capping strips & Splashguards
- 229mm (9") fixed and swivel castors with brakes
- Computer control to substitute digital control
- Heat tape

TECHNICAL DATA:

Dimensions (W x D x H):	498 x 876 x 1172
Total Weight:	125Kg
Cooking Area (W x D x H):	457 x 127 x 457mm
Oil Capacity:	31-39 Litres


GAS DETAILS	Natural Gas (NG)	Universal LP Gas (ULPG)
Minimum Supply Pressure	1.7 kPa	2.74 kPa
Operating Pressure	1.0 kPa	2.5 kPa
Total Gas Supply	116MJ/Hr	116MJ/Hr
	3/4" BSP connection	

240 Volt 10Amp connection required to run control board.

Legend:

- A Gas Connection
- B Electrical Connection
- C Solid State Controls
- D Digital Control Panel
- E Basket Lifter (Optional)
- F Computer Control Panel (Optional)

NOTE: It is the responsibility of the installing gas plumber to ensure correct supply and connection sustaining appropriate pressure when all appliances are full on.

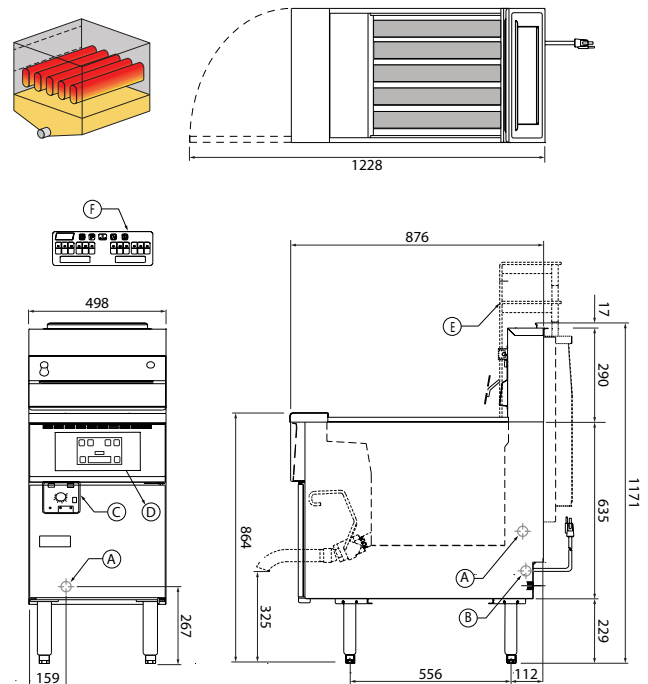

Due to continuous product research and development, the information contained herein is subject to change without notice.

Revision: B - 2/8/2024 - 02

www.stoddart.com.au

www.stoddart.co.nz

