



# K+ SERIES: KAWBT-SB2L

## Two Burner Boiling Top Left Hand Wok Attachment

Project: \_\_\_\_\_ Item: \_\_\_\_




#### **Standard Features:**


- AISI grade stainless steel
- Heavy duty complete stainless steel frame to suit K+ wok cookers
- 30MJ removable two-piece open cooktop burner
- · Heavy duty cast iron boiling top trivets
- Flame failure device included as standard
- Multi-setting gas valve allows greater regulation of flame settings
- Universal fixing mounts to allow LH to RH changeover
- Easy access to all components for servicing and adjustments
- Easy to clean fat spillage tray and rear splashback heat deflector

#### **Options:**

- NG/LPG Available in Natural or LP Gas
- PLT Pilot light per burner

### Specifications:

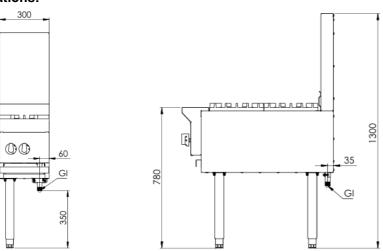



|  | MODEL      | LENGTH<br>(mm) | DEPTH<br>(mm) | HEIGHT<br>(mm) | NET WEIGHT<br>(kg) | GAS CONSUMPTION (MJ/h) |     |
|--|------------|----------------|---------------|----------------|--------------------|------------------------|-----|
|  |            |                |               |                |                    | NG                     | LPG |
|  | KAWBT-SB2L | 300            | 840           | 1300           | 50                 | 60                     | 50  |

#### **Connections:**

| GAS (GI)                          | SUPPLY PRESSURE (kPa) |     |  |  |
|-----------------------------------|-----------------------|-----|--|--|
| (BSP)                             | NG                    | LPG |  |  |
| <sup>3</sup> ⁄ <sub>4</sub> " (M) | 1.0                   | 2.6 |  |  |

- · Gas regulator is supplied with the unit
- The unit must be installed by an authorised installer in accordance to AS/NZS5601 refer to current version

Due to ongoing Product Development, Product Improvement and Research, B+S Commercial Kitchens reserves the right to alter specifications and the design of the product without notice.

**Approval Number: GMK 10703** 





