



## PRODUCT DOCUMENT PACK

Prepared and distributed by KW Commercial Kitchen

### PRODUCT

**Blizzard SN-420P Air-Cooled Ice Maker – 189kg/24hr, Cube Ice with 125kg Bin**

**Model / SKU: SN-420P**


#### KW COMMERCIAL KITCHEN

7/72 Canterbury Road, Bankstown NSW 2200

Phone 1300 001 366

Email [sales@kwcommercial.com.au](mailto:sales@kwcommercial.com.au)

Web [www.kwcommercial.com.au](http://www.kwcommercial.com.au)




Scan for the current KW product page

### DOCUMENT NOTICE

The supplier document begins on the next page. KW contact branding is added in a separate footer area and does not replace the supplier's instructions, specifications or warranty terms.

Official supplier source: <https://www.foodequipment.com.au/amfile/file/download/file/3497/product/2072/>

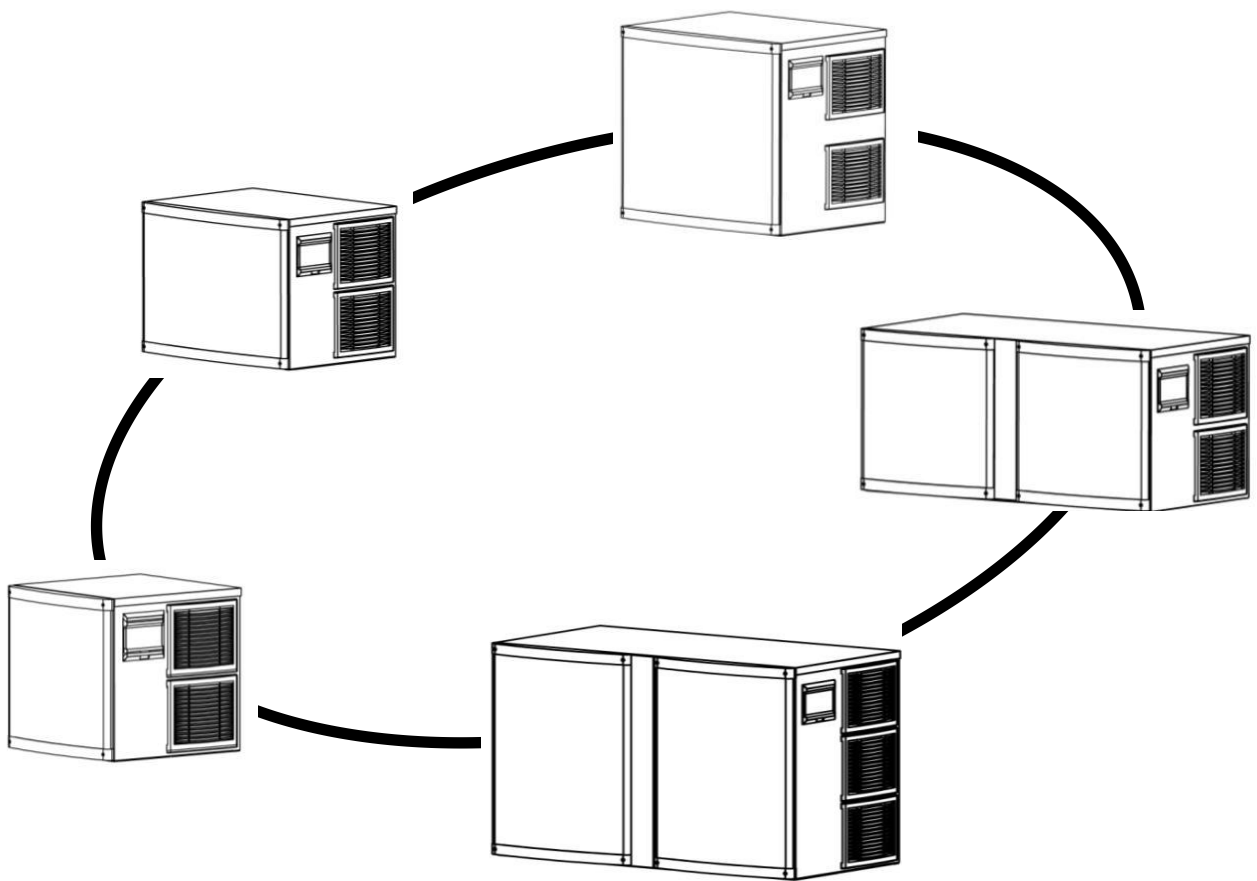

# Modular Type Ice Machine Installation and Maintenance Instructions

Please read the attached instructions carefully before installation

Part Number: 09501003-00    Version: 2018.08

# Content

## I. The Installation of Ice Machine

|                              |   |
|------------------------------|---|
| 1.Unpacking Note             | 3 |
| 2.Environmental Requirements | 3 |
| 3.Water supply installation  | 3 |
| 4.Power Supply Requirements  | 4 |

## II. The Use of Ice Machine

|                                        |   |
|----------------------------------------|---|
| 1.Checking before Operation            | 4 |
| 2.Familiarize with the Operation Panel | 5 |
| 3.Operating process                    | 6 |
| 4.Other Special Stop Conditions        | 7 |

## III. Maintenance and Common Faults

|                                      |   |
|--------------------------------------|---|
| 1.Maintenance                        | 7 |
| 2.Common Faults and Removal          | 8 |
| 3.Conditions Not Covered By Warranty | 8 |

## IV. Attachment

|                       |   |
|-----------------------|---|
| 1.List of Attachments | 8 |
|-----------------------|---|

## V. Annex

|                    |   |
|--------------------|---|
| 1.Error Codes      | 9 |
| 2.Circuit Diagrams | 9 |

Note: We reserve the rights to amend any part of the content in this manual without prior notifications.

# Modular Type Ice Machine Installation and Maintenance Instructions

## I. Ice Machine Installation

### 1. Unpacking Note

- Check the machine model before unpacking.
- Check whether the outer package is intact before unpacking.
- Check whether the machine is in good condition, or whether the accessories are complete after unpacking.

### 2. Environmental Requirements

- Indoor use only. Running the machine below freezing point is strictly prohibited.
- Environment temperature: Maximum temperature  $< 43^{\circ}\text{C}$ , minimum temperature  $> 3^{\circ}\text{C}$ .
- Peripheral spacing: Proper spacing must be observed.(spacing can be reduced accordingly with water cooling machine).Please refer to the table below:

| Machine | Spacing in cm |
|---------|---------------|
| Side    | 15            |
| Back    | 20            |
| Front   | 30            |

- Machine level placement: Level the machine in place. (It can be adjusted through the adjustable foot at the bottom of the machine.)

### 3. Water Supply Installation


- The water used for the ice making must be in accordance with the standards of local drinking water.
- The water used for the ice making may be connected to a filtration device first. (Depending on the local water quality)
- **It is forbidden to connect the ice machine with hot water.** ⚠
- Please refer to the water inlet and drain pipe layout as following:

| Water Temperature ( $^{\circ}\text{C}$ ) | Ice Making Water Pressure (Mpa) | Cooling Water Pressure (Mpa) | Inlet Pipe Diameter (mm) | Drain Pipe Diameter (mm)     |
|------------------------------------------|---------------------------------|------------------------------|--------------------------|------------------------------|
| $>0.6$                                   | $>0.13$                         | $>0.59$                      | $>9.5$ (3/8")            | $>15.8$ (5/8")               |
| $<32$                                    | $<0.55$                         | $<1.17$                      |                          | Drop per meter $>3\text{cm}$ |

**The installation of drain pipe must observe the following principles (Please refer to the diagram below):** ⚠


1. Any point in the middle of drain pipe shall not be higher than the outfall.
2. Any point in the middle of drain pipe shall not be higher than outlet.

- **Installation Diagram (for reference only):**
- **Air-Cooling Machine**

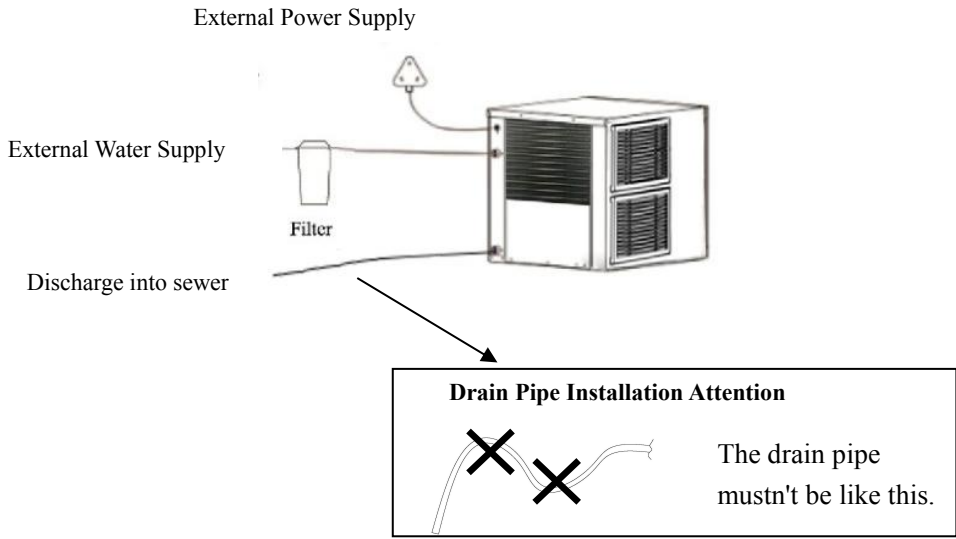

Note:  
(a) The outer filter is optional.

- **Water-Cooling Machine**

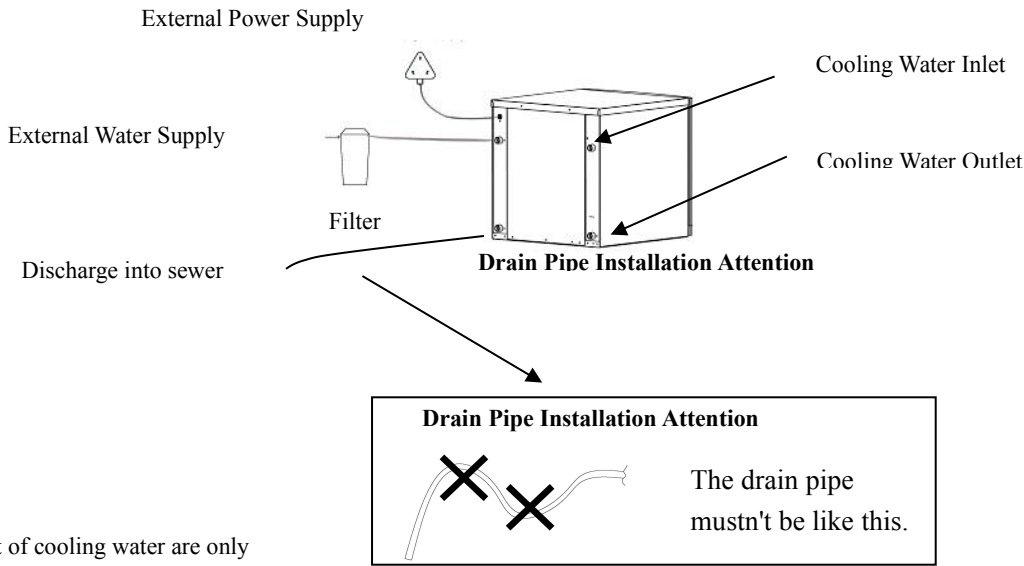

Note:  
(a) The inlet and outlet of cooling water are only applicable to the water cooling machine.  
(b) The outer filter is optional.

## 4. Power Supply Requirements

- The voltage, frequency and capacity of power supply provided is consistent with that marked on the machine nameplate.
- **The earth terminal of the power supply, socket or plug must be connected to the external grounding steadily! ⚠**
- The power supply wire provided etc. shall all be in accordance with the standards of the local country or region.
- The power supply voltage fluctuation shall not exceed  $\pm 10\%$  of the rated voltage.


## II. The Use of Ice Machine

### 1. Checking Before Operation


- Whether all the temporary fixed tapes in the ice machine has been removed!
- Whether all the accessories or other items in the ice machine has been taken out!
- Whether the ice machine is appropriately leveled!
- Whether all the water pipes are correctly connected!
- Whether the plug is connected to the power supply steadily!
- **Whether the machine grounding is connected to external grounding steadily! ⚠**
- To confirm that the power supply's voltage frequency and others are consistent with the machine nameplate!
- To confirm that the environment temperature and water temperature is with the scope mentioned!

## 2. Familiarize with the Operation Panel

- With voice panel:

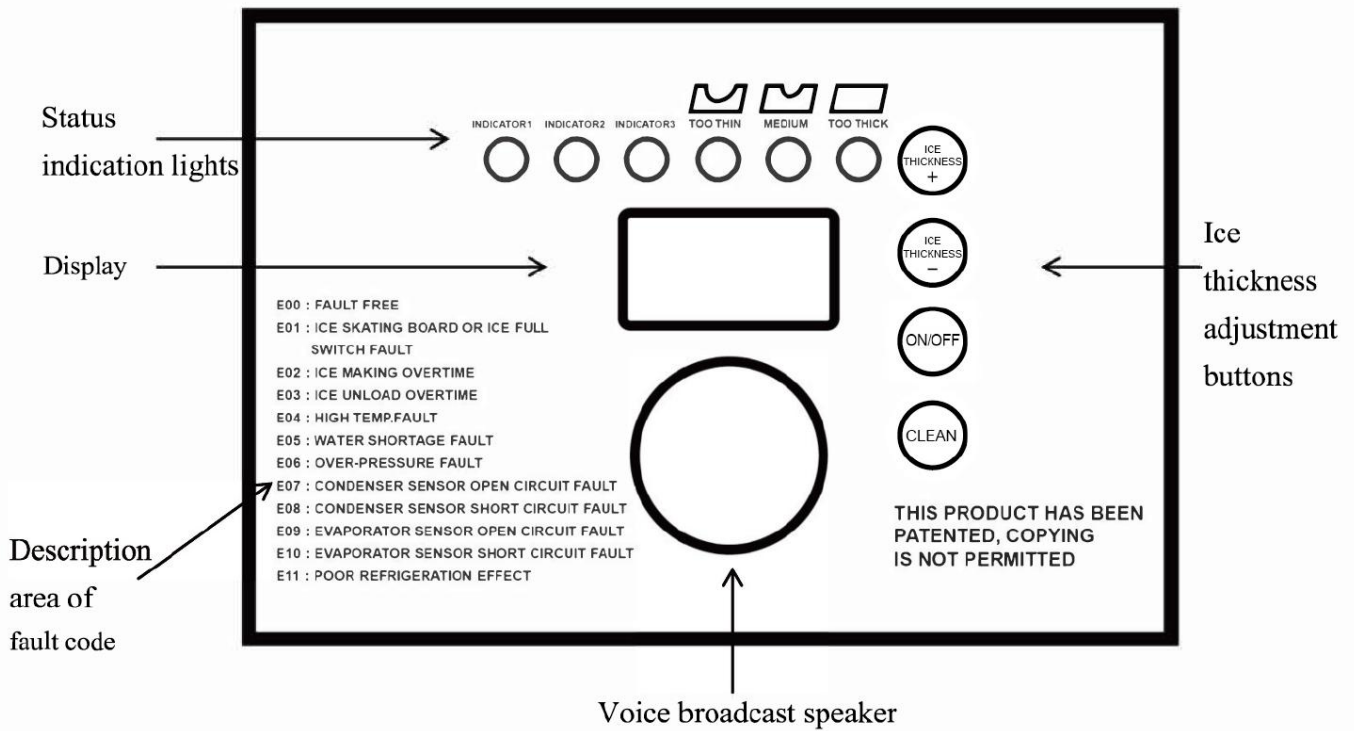

### Without voice panel:

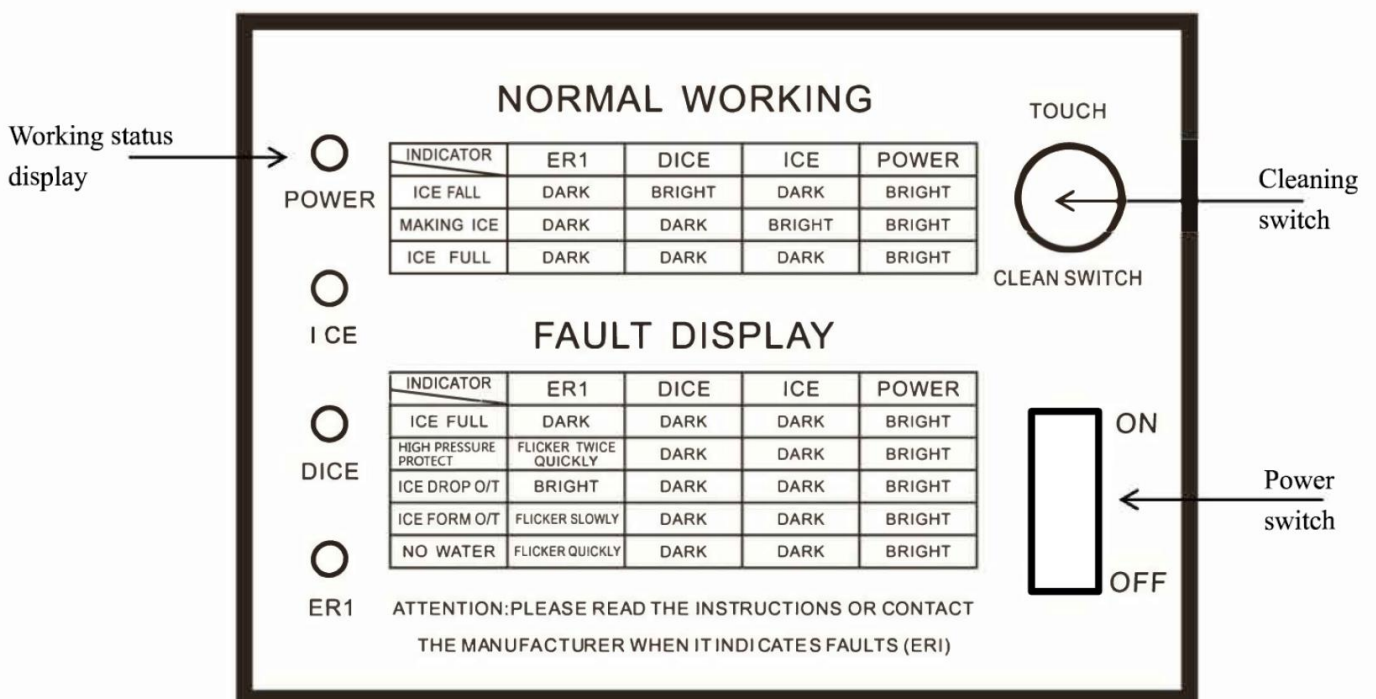


### 3. Operating Process

- **Start up:** Clicking the button (switch) on the panel after connected to the power and water supply correctly, the machine will on. During the whole operating process, it will work automatically.(Note: Please turn off the power supply in case of thunderstorm or long time not in use.)
- **Pre-cooling:** After power on, the water inlet valve will turn on automatically, the evaporator pre-cools for 30 seconds before the water pump starts up, meanwhile the compressor starts, the water pump stops running, the water inlet valve continues to take in water till the specified level (that is to say water floating ball switch stops water inlet).
- **Ice making:** After pre-cooling for 30 seconds, the water pump starts up, continuous water flows smoothly and ice comes into being gradually in ice tray of the evaporator.
- **Ice falling:** After reaching the stipulated ice making time, the water pump shuts down, the defrost valve powers on and open, and hot air enters into the evaporator, at the same time the drain valve closes after 30 seconds. The water inlet valve open, the whole sheet of ice will slide from the evaporator into the storage refrigerator after defrosting for 1~2minutes. **During the process of ice falling, hands should be away from the storage refrigerator to avoid being hit by i△**
- **Shutdown:** When the machine runs, clicking the button(switch) on the panel and the machine stops working.
- **Automatic Stop When Ice is Full:** In the running, with the accumulation of ice in the ice bin, it will reach to a certain height and block other ice fall down .Eventually the full of ice result in sliding board cannot be rebounded and reset. After machine detected it for a few time (30 seconds or so) and confirmed ice bin is full of ice , the machine will stop working automatically. Until removed full of ice ,the sliding board will be rebounded and reset again ,then machine will work automatically again.
- **Ice thickness adjustment:** There are two methods to adjust the ice thickness. Please choose one according to the machine.

**Method I,** In the process of ice making, the adjusting screw on the ice thickness detector can be rotated left or right according to the actual condition and the attached adjustment instruction labeling if the ice thickness isn't satisfactory, and tightens the screw after the adjustment is completed.


Note: The adjustment shall be limited to a circle each time.

Ice Thickness Adjusting Screw

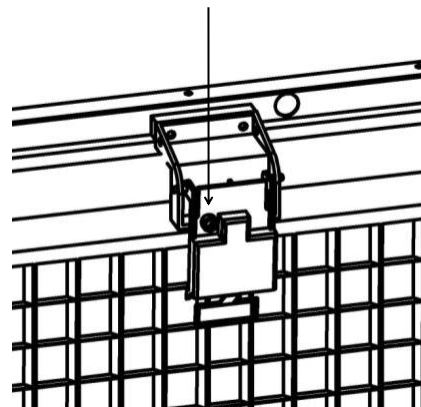

**Method II,** In ice making process, if you are not satisfied with ice thickness please adjust it through clicking the button on the touch panel (increase ice thickness + , reduce ice thickness -)

Note: ice making time will extend or shorten one minute for every click.

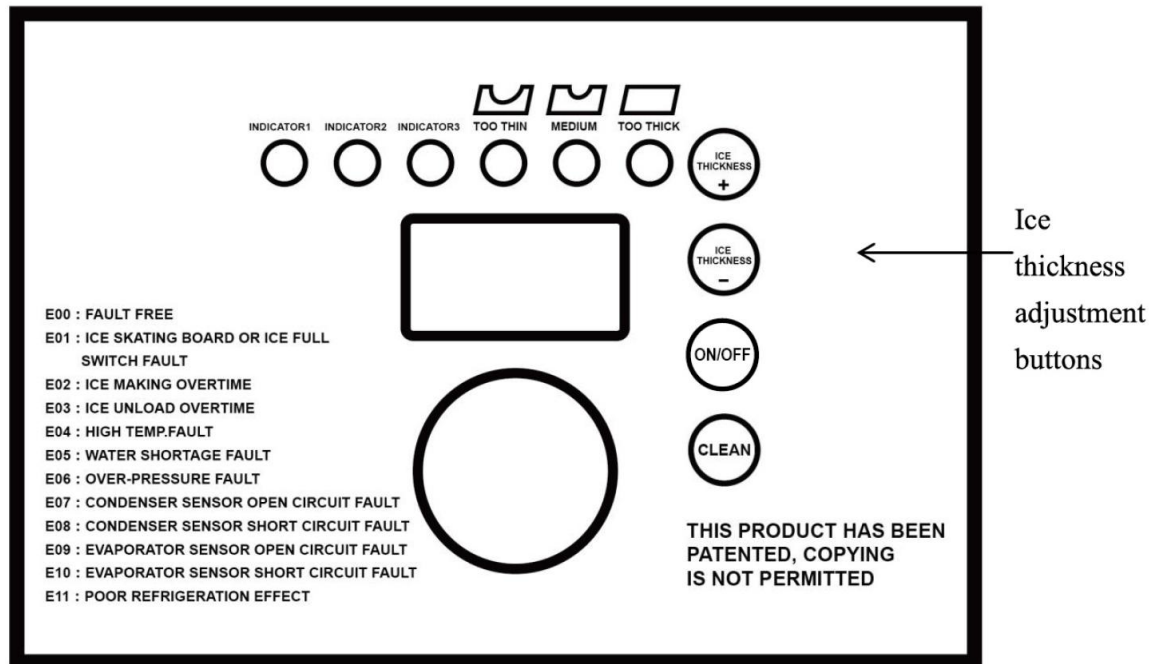


### 4. Other Special Stop Conditions

- There is no ice falling in three times consecutive cycles, this series of machine stops automatically.
- Environmental temperatures exceeds the prescribed temperature, this series of machine stops automatically.
- No condensed water in water cooling machine, this series of machine stops automatically.

## III. Maintenance and Common Faults

### 1. Maintenance:

- **Before maintenance and repair, the power must be cut off!** ⚠
- Maintenance and repair shall be handled by qualified professionals only.
- Please read this manual in detail before maintenance and repair.
- The manufacturer isn't responsible for the consequences of poor water quality and wrong operation.
- Clear the dust on the surface of machine regularly.
- Clean the filter net (only applicable to air cooling machine) regularly, As shown by picture:



Take out all the filter nets along the direction of arrow on both sides, and put back the net into the ventilation window after dusting by soft brush.

- Clean the cooling fin regularly at least at every 6 months. Please use the soft brush to work in up-and-down lightly. Don't swipe left-and-right for fear of damaging the cooling fin and influencing the heat dissipation effect.

## 2.Common Faults and Removal:

| Fault Phenomenon                                            | The possible causes of troubleshooting                                                                       | Check and eliminate                                                               |
|-------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|
| Ice Machine not starting up                                 | No power supply                                                                                              | Power switch, power wire                                                          |
| Automatic stop after starting the ice machine for 3 minutes | High pressure protection                                                                                     | High ambient temperature, dirty condenser , high voltage switch, air cooled motor |
| Ice machine can only make ice once whenever it starts       | Ice full                                                                                                     | Ice sliding board                                                                 |
| Ice cannot fall                                             | Ice machine is dirty, the ambient temperature is low                                                         | Clean, ambient temperature up to requirement.                                     |
| Ice is too thin or incomplete                               | Tank water level is too low, inlet valve doesn't work, water pressure is not enough 、 waterway is not smooth | Check water level, water inlet valve, water pressure and pipeline                 |
| Ice making is too slow                                      | Condenser is dirty, high ambient temperature and poor ventilation                                            | Clean the filter and condenser, keep specific spacing around the machine          |

## 3.Conditions Not Covered By Warranty:

The following conditions are not with the scope of ice machine warranty:

- Normal maintenance, adjustment and cleaning.
- Modify ice machine without authorization or use the non-original parts without prior written permission from manufacturer.
- Damage incurred due to improper installation, power supply, water supply and drainage, etc.

- D. Additional labor fee due to holidays, overtime, etc., travel expenses during the travel and reimbursement, etc. The extra expenses caused by inconvenience of maintenance.
- E. Damage parts caused by misuse, abuse or negligence.
- F. Damage or malfunction incurred caused by failure to follow the installation cleaning or maintenance of the ice machine in the manual.
- G. Other external damages not mentioned above.

## IV. Attachment

Please refer to the attached list in detail.

## V. Annex

### 1. Error Codes:

| Code | Annotation                                                                | Machine Action      |
|------|---------------------------------------------------------------------------|---------------------|
| E00  | Fault Free                                                                | Operating           |
| E01  | Ice skating board or ice full switch fault                                | Protection Shutdown |
| E02  | Ice making overtime                                                       | Protection Shutdown |
| E03  | Ice unload overtime                                                       | Protection shutdown |
| E04  | High temperature fault                                                    | Protection shutdown |
| E05  | Water shortage fault                                                      | Protection shutdown |
| E06  | Over-pressure fault                                                       | Protection shutdown |
| E07  | Condensation sensor open circuit fault<br>(display once every 5 seconds ) | Non stop            |
| E08  | Condensation sensor short circuit fault<br>(display once every 5 seconds) | Non stop            |
| E09  | Evaporator sensor open circuit fault<br>(display once every 5 seconds )   | Non stop            |
| E10  | Evaporator sensor short circuit fault<br>(display once every 5 seconds )  | Non stop            |
| E11  | Poor refrigeration effect                                                 | Protection Shutdown |

### 2.Circuit Diagrams

- Please refer to the machine body in detail.

Note: We reserve the rights to amend any part of the content in this manual without prior notifications.