



## PRODUCT DOCUMENT PACK

Prepared and distributed by KW Commercial Kitchen

### PRODUCT

**Fagor Kore FT-E905L Electric Fry Top | 7.5kW Commercial Griddle | 415V**

**Model / SKU: FT-E905L**

#### KW COMMERCIAL KITCHEN

7/72 Canterbury Road, Bankstown NSW 2200

Phone 1300 001 366

Email [sales@kwcommercial.com.au](mailto:sales@kwcommercial.com.au)

Web [www.kwcommercial.com.au](http://www.kwcommercial.com.au)



Scan for the current KW product page

### DOCUMENT NOTICE

The supplier document begins on the next page. KW contact branding is added in a separate footer area and does not replace the supplier's instructions, specifications or warranty terms.

Official supplier source: <https://www.foodequipment.com.au/amfile/file/download/file/2527/product/8165/>



Catalogue  
FOOD SERVICE  
Chapter  
COOKING

Model  
FT-E705 L 400V 3N

19058922

09/03/2020

ELECTRIC FRY-TOP, FT-E705 L


- Deep-drawn surface tops manufactured in 1.5 mm thick AISI-304 stainless steel.
- Laser-cut joints, automatic welding and polishing. Hidden screws.
- 12 or 15 mm thick mild steel fry tops which are quick-heating and high power.
- Whole-module fry tops have two separate heating areas.
- Rapid reaction and recovery times of the fry-top temperature.
- The fry tops are welded to the deep-drawn surface top.
- The deep-drawn shell and its rounded edges and corners make cleaning much easier.
- The fry top is tilted towards the front to make it easier to collect grease and liquids.
- Fitted with an opening to collect cooking grease and a tray to store it which has capacity to store up to 2 litres depending on the model.
- Optional anti-splash side and rear guards, easy to remove.
- High-temperature enamelled cast iron flue protector.
- Access to components from the front.
- Machines with IPX5 grade water protection.
- Electrically heated models with stainless steel heating elements; thermostatic temperature control, between 100 and 300 °C.
- Safety thermostat.
- Model with smooth plate of 328 x 468 mm.
- Single heating zone.

OPTIONAL ACCESSORIES

- Scraper (The models with a chrome surface include the scraper as standard.).
- Anti-splash guard (in three parts to make cleaning easier).
- "
- "

DIMENSIONS

|            |          |                |          |
|------------|----------|----------------|----------|
| X Width    | 400 mm   | X Gross width  | 440 mm   |
| Y Depth    | 730 mm   | Y Gross depth  | 822 mm   |
| Z Height   | 290 mm   | Z Gross height | 535 mm   |
| Net Weight | 70,0 kg  | Gross Weight   | 83,0 kg  |
| Net volume | 0,080 m3 | Gross volume   | 0,193 m3 |



ELECTRICITY TECHNICAL SPECIFICATIONS

|                    |           |
|--------------------|-----------|
| Electric power     | 5,000 kW  |
| Amperage (A)       | 7,3A      |
| Heating power      | 5,00 kW   |
| Voltage            | 400V - 3N |
| Electric frequency | 50/60Hz   |

CONNECTIONS TECHNICAL SPECIFICATIONS

|                            |              |
|----------------------------|--------------|
| 230 V three-phase wiring   | 3X2,5MM2+T   |
| Single-phase 230V wiring   | 2X4MM2+T     |
| Three-phase +N 400V wiring | 3X1,5MM2+T+N |



www.fagorindustrial.com

Catalogue  
**FOOD SERVICE**


Chapter  
**COOKING**

Model  
**FT-E705 L 400V 3N**


19058922

09/03/2020

## **FT-E705**

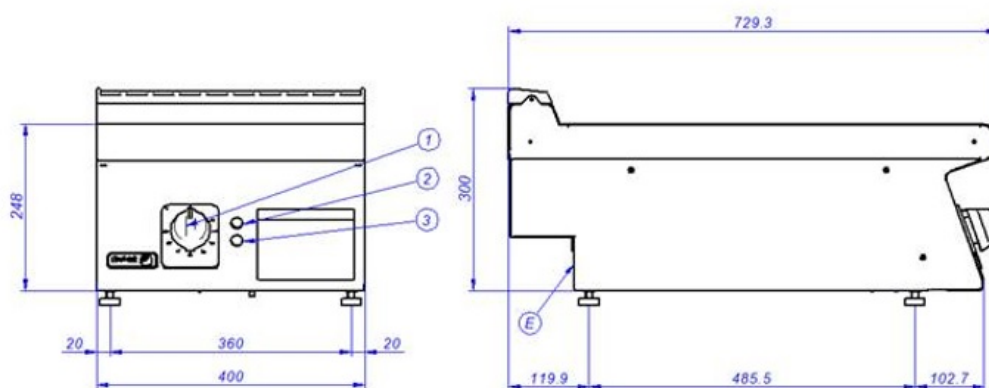

## **FT-E710**

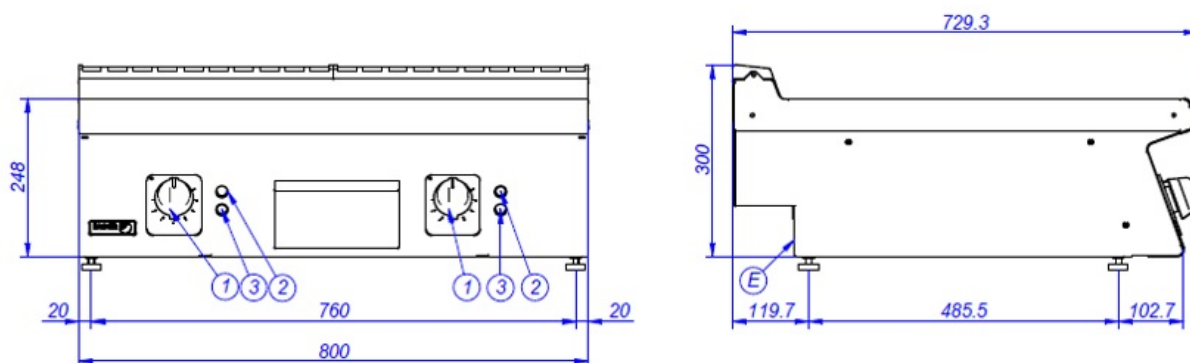

E – Conexión eléctrica  
1 – Mando termostato  
2 – Piloto verde  
3 – Piloto ámbar

Electrical connection  
Thermostat control  
Green pilot  
Ambar pilot

Connexion électrique  
Commande de thermostat  
Lumière verte  
Lumière ambre