



PRODUCT DOCUMENT PACK

Prepared and distributed by KW Commercial Kitchen

PRODUCT

Washtech M2 Passthrough Dishwasher – 500mm Rack, HUD Controls

Model / SKU: M2


KW COMMERCIAL KITCHEN

7/72 Canterbury Road, Bankstown NSW 2200

Phone 1300 001 366

Email sales@kwcommercial.com.au

Web www.kwcommercial.com.au



Scan for the current KW product page

DOCUMENT NOTICE

The supplier document begins on the next page. KW contact branding is added in a separate footer area and does not replace the supplier's instructions, specifications or warranty terms.

Official supplier source: https://moffat.global.ssl.fastly.net/sites/default/files/products/specification/M2_au.pdf

M2

PASSTHROUGH DISHWASHER

WASHTECH®



STANDARD FEATURES

60, 120 and 180 second cycles
 Wash capacity of up to 1,080 plates per hour
 Compatible with 595mm to 640mm benchgaps
 Touchscreen controls with versatile Heads Up Display
 1.0HP soft start wash pump
 Dual chemical pumps
 Assured rinse with break tank and booster pump
 Hands-free drainage system with sump and drain pump
 Two-stage stainless steel wash and drain filtration
 Heavy-duty stainless-steel construction and manifold
 Independent stainless-steel arms
 Uprateable power options for rapid rinse recovery

1x 500mm dish rack (600 70028)
 1x 500mm cup rack (600 70029)
 1x cutlery container (C660503)
 1x quick connection kit (all hoses and 1p/15A plugset)

SPECIFICATIONS

A - Hot Water

Temperature	65°C*
Connection	3/4" male, hose supplied
Pressure	100-500kPa
Flow	10L per minute
Backflow prevention	Atmospheric vacuum breaker
Consumption	2.4L per cycle

D - Drainage


Drain pump flexi-hose	25mm
-----------------------	------

C - Electrical

	V	Hz	A/ph	Max kW
Single phase	230-240	50	15	3.75
Three phase	400-415	50	15	9.00

*Suitable for connection to low inlet water temp, flow and/or pressure supplies.
 Isolating switch must be within 1m of, and not directly behind, the machine
 Refer to operator manual for installation instructions

In line with policy to continually develop and improve its products, Washtech reserves the right to change specifications and design without notice.

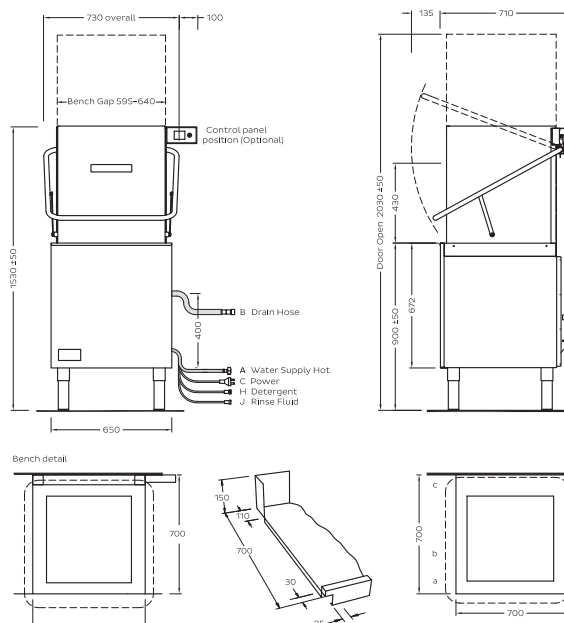

Dimensions

	Machine	Packed
Width (mm)	730	760
Depth (mm)	710	820
Height (mm)	1530	1460
Weight (kg)	94	125
Volume (m3)		0.91

Water Quality

	Min	Max
pH	7	8
TDS	1	135
Cl-		100
SO4		400
Fe		0.1
Mn		0.5
Cu		0.05
Cl2		0.1

Corner Installation Notes:

- Machine should be installed so racks are pushed into the back of the machine.
- Allow 300mm clearance to front for service access.
- Splashback return to be no higher than 150mm.

Touchscreen Control:

- Bracket supplied with controls enables install either side, under bench or on wall.
- Consult Operator Manual for full details on correct installation.



moffat.com.au | 1300 269 801

Manufactured in New Zealand by Washtech Limited - Distributed in Australia by Moffat PTY Limited
 © Copyright Washtech Limited / Washtech M2 Series-5 / WM20040 / Feb-25



an Ali Group Company



the spirit of excellence