



PRODUCT DOCUMENT PACK

Prepared and distributed by KW Commercial Kitchen

PRODUCT

Culinaire CH.IBSJ.BMC.U.GSF.6 Hot Food Bain Marie – 6 Bay, S/S Top & Joinery Panels

Model / SKU: CH.IBSJ.BMC.U.GSF.6

KW COMMERCIAL KITCHEN

7/72 Canterbury Road, Bankstown NSW 2200

Phone 1300 001 366

Email sales@kwcommercial.com.au

Web www.kwcommercial.com.au



Scan for the current KW product page

DOCUMENT NOTICE

The supplier document begins on the next page. KW contact branding is added in a separate footer area and does not replace the supplier's instructions, specifications or warranty terms.

ch.ibsj.bmc.u.gsf.6 a3 datasheet

SKU: CH.IBSJ.BMC.U.GSF.6

Distributed by KW Commercial - kwcommercial.com.au

Manufacturer documentation - (c) Culinaire

Retrieved: 2026-07-08

<https://www.kwcommercial.com.au/product/culinaire-ch-ibsj-bmc-u-gsf-6-hot-food-bain-marie-6-bay-s-s-top-joi>

Product Information

- Mobile heated island buffet 6 bay, with stainless steel top and joinery panels.
- Fitted with an underbench bain marie & heated gantry (CH.BMC.U.GSF)
- Robust 304 grade stainless steel construction with stainless steel top and joinery panels
- Wet or dry operation (temperature varies greatly when run dry, should not be left unattended for long periods of time)
- Temperature regulation via digital control, designed to hold product between 65°C - 90°C
- Air insulated, double skinned tank for energy efficient heating
- Independent controls for bainie marie and gantry
- Gantry fitted with 10mm thick toughened glass and overhead Quartz IR heat lamps with adjustable temperature
- Manual fill and manual empty, valve operated waste
- 1/1 GN sized well, fits pans up to 150mm deep (sold separately). Pans are recessed to minimise water condensation on surrounding bench top
- Additional items can be incorporated into the buffet unit such as plate dispensers, plate shelves under, induction warming units, etc.
- Heavy-duty non-marking 75mm swivel castors, two with brakes
- **Made to Order**
- **12-month parts and labour warranty**



Specifications



Model	CH.IBSJ.BMC.U.GSF.6
W x D x H (mm)	2400 x 1000 x 1260
Total Connected Load	5.7kW
Electrical Connection	3Ø+N+E 400VAC / 50Hz (Onsite connection)
Water Connection	G 1/2" BSP
Waste Connection	1 1/4" BSP

Optional Extras

Radius Well
 Add **R** to code after the **U** CH.IBSJ.BMC.UR.GSF.6
Note: Optional extras must be selected at time of order

Legend

- A** Electrical Connection
- B** Water Connection
- C** Waste Connection

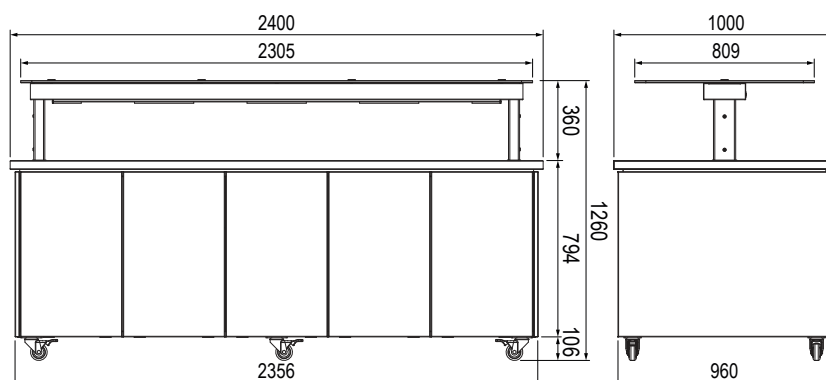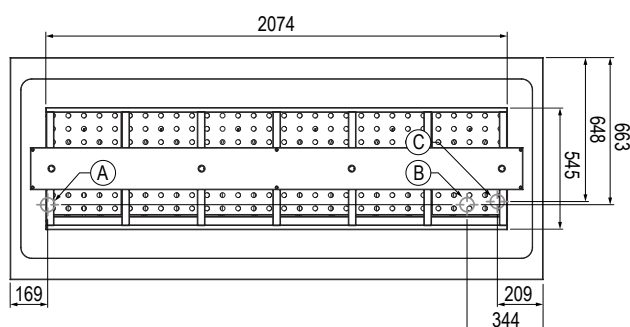

www.stoddart.com.au
www.stoddart.co.nz

Revision: A - 14/01/2025 - 03

Due to continuous product research and development,
 the information contained herein is subject to change without notice.

