

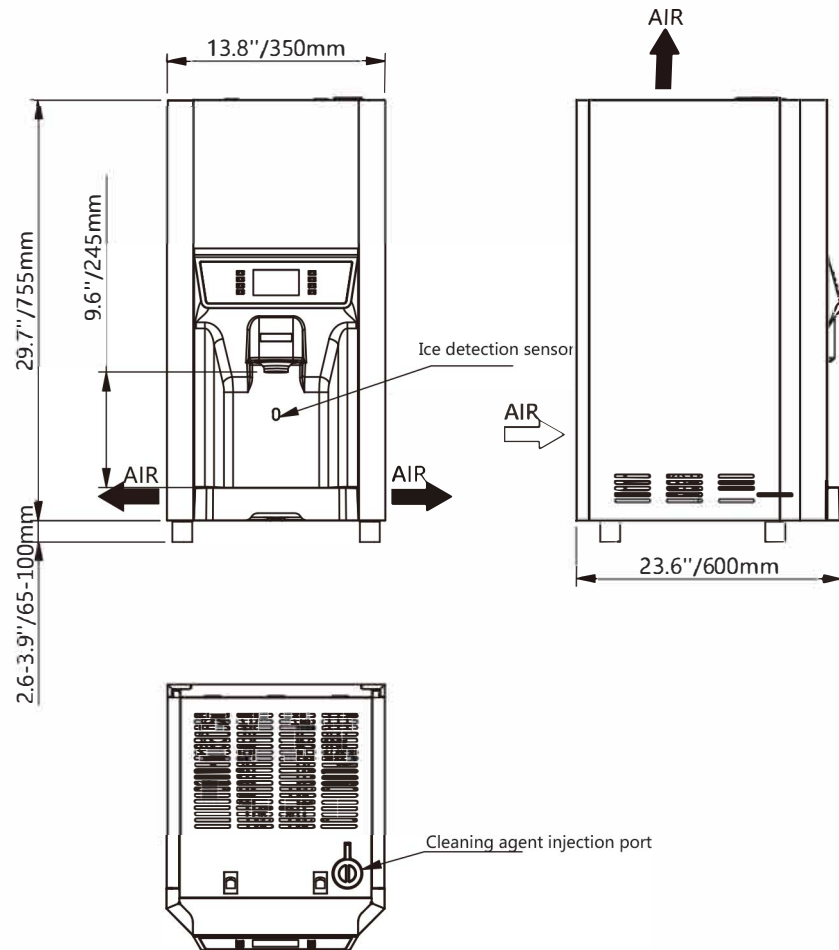




*We reserve the right to make changes in specifications and design without prior notice.

1. Install this product correctly in accordance with the instructions for water supply/drainage connection and electrical connection described in the attached user manual and installation manual;
2. The ice-making capacity depends on the ambient temperature and the water supply temperature around the product ;

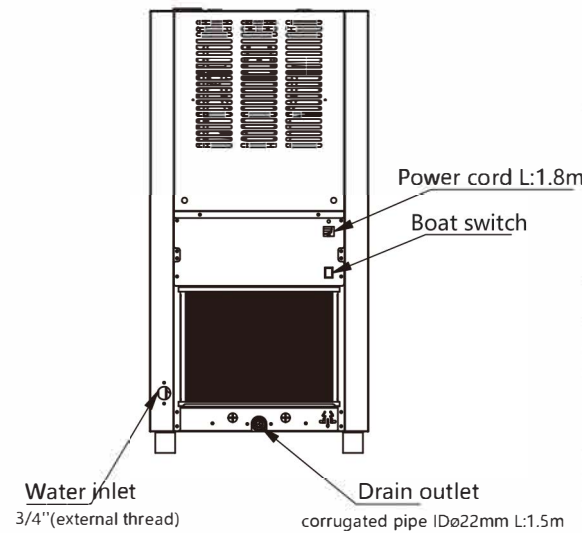

Item	Counter Top Ice&Water Dispenser
Model	SN-229D
Rated voltage	single-phase 240V 50Hz
Rated current	3.7
Rated power	525W (power factor: 95%)
Ice shape	Nugget ice (6.35mm × 9.52mm × 15.9mm × 17mm) (1/4" × 3/8" × 5/8"×2/3")
Ice storage	Real ice storage: 6.2lbs
Ice-making capacity	About 100kg/24h(ambient temperature: 21℃, water temperature: 10℃)
Ice removal method	"Button-touch screen, quantitative ice dispensing, adjustable ice dispensing amount; Infrared sensor ice dispensing; Ice and ice water can be switched; "
Water discharge method	Push button-touch screen, quantitative water discharge, adjustable water discharge volume; water and ice water can be switched;
External dimensions	350mm(W) × 600mm(D) × 830mm(H) 13.8"(D) × 23.6(W) × 32.7(H)
Exterior materials	ABS (front panel) Stainless steel (front, top, sides) Carbon steel plate (back side)
Insulation material	Cyclopentane foaming
Electrical connection	Y-type connection
Water supply connection	3/4" external threaded inlet (rear)
Drainage connection specifications	Corrugated pipe (back side)
Ice-making system	Thin-walled cylindrical ice making
Ice-making system	Screw drill extrusion ice extraction
Evaporator	Stainless steel
Compressor type	fully enclosed
Condenser type	Air-cooled, finned tube type
Heat dissipation	/
Refrigeration control	capillary
Refrigerant	R290
Ice Making Control	Ice full sensor, photoelectric liquid level switch
Ice storage control	Ice full sensor
Product weight	NW: 47kg, GW: 51kg
Packaging type	Carton+wooden pallet: 660mm(D) × 430mm(W) × 920mm(H) Carton+wooden box: 700mm(D) × 470mm(W) × 945mm(H)
Attachment	Instruction manual, water inlet pipe, filter, base feet
Operating conditions	Ambient temperature: 5-38℃; Water supply temperature: 5-32℃ Water supply pressure: 0.07-0.55 MPa Voltage fluctuation rate: ±10%

DISPENSER ICE MACHINE SN-229D

SCALE 1:8

DRAWING NO.