

# Commercial Tapware

3monkeez®

innovate. create. deliver.

Certified System
Quality
ISO 9001
SAI GLOBAL

2026

3monkeez®
www.3monkeez.com.au
sales@3monkeez.com.au

# 3monkeez®

# MISSION STATEMENT

**Put people first. Build a great product. Reinvent industry expectations.**

At 3monkeez, we understand that building a great quality and reliable product is only part of the story.

We provide an experience for our customers that exceeds expectations and makes us a trusted supplier of commercial plumbing and catering products across Australia. By putting people first our highly trained team can not only provide the right product and support, they also work closely with our customers to build long-lasting and rewarding relationships.

Through our commitment to manufacturing exceptional products and offering an unmatched experience for our customers we always strive to exceed and reinvent customer expectations when it comes to dealing with 3monkeez.

GUARDIAN® TAPWARE

SCRAPTRAP

HEEL GUARDIAN®

IN2GR8® LINEAR DRAIN SYSTEM

GUARDIANCARE®

CLEANAJET® STAINLESS STEEL

GUARDIAN® ZEROTOUCH

People are at the centre of everything we do. We provide industry leading customer service with a highly trained team of professionals available across Australia.

As a supplier of commercial stainless steel products for over 30 years the quality of our products matter to us. Our products will always provide creative and reliable solutions.

We are committed to providing innovative solutions that exceed customer expectations through our customer service, products, resources and unbeatable delivery times.

# GUARDIAN® TAPWARE

Lead Free

100% STAINLESS STEEL LEAD FREE

10 YEAR WARRANTY INCLUDING 2 YEAR ONSITE SUPPORT

# ZERO TOUCH RANGE

## Hygienic solutions available now

Scan the QR code to learn more




### Timed Sensor Compact Bubbler

**T-3MSS-BUBCSB**

**T-3MSS-BUBCSM**

- Battery operated or mains powered
- Infrared 6 second timed sensor
- Includes flexi hose – ½" FI BSP
- Full stainless steel construction
- WELS 6 Star 2.5LPM
- Working pressure range 150kPa-500kPa
- Maximum operating temperature 40 degrees



**Suitable for bars, cafés, restaurants, shopping centres, airports and more.**




### Wall Mounted Infrared Sensor Tap

**T-3MSS-WMSTB**

- Battery operated
- Infrared sensor
- Full stainless steel construction
- Working pressure range 150kPa-500kPa
- WELS 6 Star 3.5LPM
- Maximum operating temperature 50 degrees
- All in one, no external parts



sales@3monkeez.com.au

02 9627 6111

3monkeez®

innovate. create. deliver.

**www.3monkeez.com.au**

# The **Stainless Steel Advantage**

## Contents


**Clean-A-Jet® Range**

| | |
|---|---|
| Bench Mount Pre-Rinse Units | 9-20 |
| Wall Mount Pre-Rinse Units | 21-32 |

**Guardian Tapware® Range**

| | |
|---|---|
| Bench Mount Body with Standard Spout | 34-37 |
| Wall Mount Body with Standard Spout | 38-41 |
| Bench Mount Body with Gooseneck Swivel Spout | 42-44 |
| Wall Mount Body with Gooseneck Swivel Spout | 45-47 |
| Single Bench Mounted Pot and Kettle Filler | 48 |
| Single Wall Mounted Pot and Kettle Filler | 49 |
| Stainless Steel Laboratory Tapware | 50-69 |
| School Pillar Taps | 70-71 |
| Gas Turret | 72-74 |
| Stainless Steel Sink and Basin Mixers | 76-79 |
| Stainless Steel Swivel Gooseneck Sink Mixer | 80 |
| Stainless Steel In Wall Mixer | 81 |
| Stainless Steel Lever Handle In Wall Mixer | 82 |
| Wall Mounted Shower Rose | 83 |

**Zero Touch Range, Bib and Pillar Taps**

| | |
|---|---|
| Bench Mount Infrared Sensor Tap | 85 |
| Gooseneck Bench Mounted Sensor Tap | 86 |
| Wall Mounted Infrared Sensor Tap | 87 |
| Pillar Tap with Bench Mount Sensor | 88 |
| Pillar Tap with Wall Mount Sensor | 89 |
| Lever Handle Pillar Tap | 90 |
| Push Button Pillar Tap | 91 |
| Bib Tap with Bench Mount Sensor | 92 |
| Bib Tap with Wall Mount Sensor | 93 |
| Lever Handle Bib Tap | 94 |
| Push Button Bib Tap | 95 |

**Guardian Tapware® | Bubblers and Bottle Filler Range**

| | |
|---|---|
| 45 Degree Metal Mouthguard Range | 96-100 |
| 45 Degree Silicone Mouthguard Range | 101-110 |
| Remote Hob Mount Silicone Mouthguard | 111 |
| Wall Mount Silicone Mouthguard Range | 109-113 |
| Compact Bubblers | 114-116 |
| Wall & Bench Mount Bottle Fillers | 117-128 |

**Commercial range**

| | |
|---|---|
| Knee & Foot Valves | 129-132 |
| Thermostatic Mixing Valve and Tempering Valve | 133 |
| Cleaners Sink Tapware | 134-139 |
| Hot Wash Reel & Trigger Valve | 140 |
| Glass and Jug Rinsers | 141-145 |

**Tapware Accessories and Spare Parts**

| | |
|---|---|
| Pre-Rinse Sub Assemblies | 147-150 |
| Bench Mount Tap Bodies | 151-152 |


*Exclusions apply

3monkeez.com.au

## **Contents** *continued*


| | |
|---|---|
| Wall Mount Tap Bodies | 153-154 |
| Wall Elbow & Bench Outlet | 155 |
| Lever Handle Top Assembly | 156 |
| Cross Handle Top Assembly | 157 |
| Pot Filler & Risers | 158 |
| Pre-Rinse Accessories | 159 |
| Pre-Rinse Hoses & Adaptors | 160 |
| Tap Body Accessories | 161 |
| Trigger Valve & Handle | 162 |
| Standard Spouts | 163 |
| Goose Neck Spouts | 164 |
| Cleaner Sink Spouts and Accessories | 165 |
| Mixer Parts | 166 |
| Top Assembly parts | 167 |
| Pillar and Bib Tap Spare Parts | 168 |
| Compact Bubbler Spare Parts | 169 |
| Bubbler and Bottle Filler Spare Parts | 170-171 |
| Conversion Kits for Bench and Wall Mount Taps | 172-173 |
| Sensor Tap Spare Parts | 174 |




*Exclusions apply

CLEAN A JET®
STAINLESS STEEL


GUARDIAN® TAPWARE

100% STAINLESS STEEL LEAD FREE

## Premium Quality

To ensure 3monkeez® tapware withstands the rigors of any commercial application, our Guardian Tapware® and Clean-A-Jet® range of products are manufactured from 100% stainless steel (S/S).

The clean, attractive appearance and premium qualities of stainless steel protect your health and the environment, making it ideally suited to modern fit-outs to provide a lifetime of satisfaction.

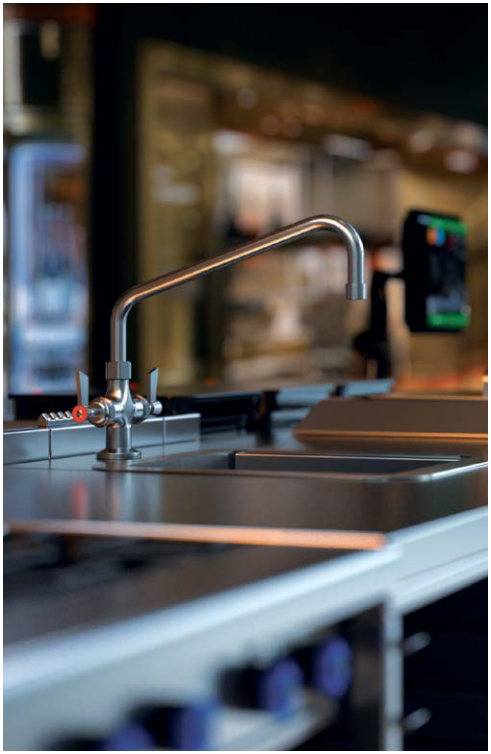

### ZERO LEAD CONTAMINATION
Water quality not compromised.

### NO GRIME BUILD-UP
Waterways remain clean and the quality and taste of the water is not distorted.

### SMOOTH FINISH
Stainless steel provides an easy to clean surface and prevents the build-up of bacteria.

### HIGHLY DURABLE
Strong material reducing the occurrence of dents and bends.

### SMALL FOOTPRINT
Stainless steel is 100% recyclable.

*Exclusions apply

3monkeez.com.au

# Commercial Tapware

Lead Free AS 3718 23145


WATER RATING 4.5 litres per minute Licence No. 1044

100% STAINLESS STEEL LEAD FREE

CLEANAJET® STAINLESS STEEL

## Pre-Rinse Units

3monkeez® is committed to bringing you products that last. Constructed from complete stainless steel, our Pre-Rinse units not only have a clean, attractive appearance, they are able to meet the demands of even the toughest commercial applications to provide a lifetime of satisfaction.

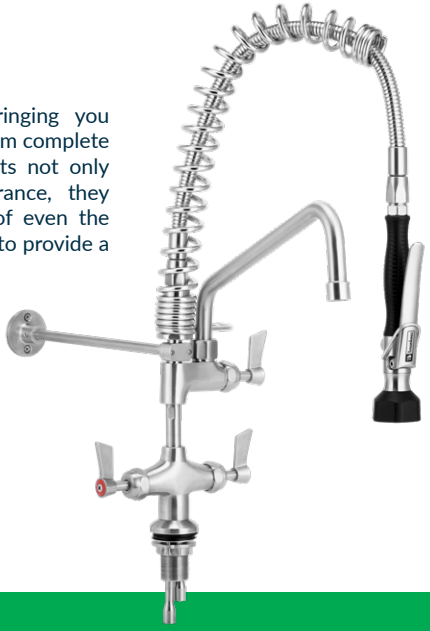

10 YEAR WARRANTY INCLUDING 2 YEAR ONSITE SUPPORT

WATER RATING www.waterrating.gov.au
4.5 litres per minute (spray tap)
In accordance with AS/NZS 6400
Licence No. 1044
3monkeez Pty Ltd
Second outlet 4 star 7.5 litres per minute

100% STAINLESS STEEL LEAD FREE

2 YEAR WARRANTY ONSITE

**FIRST IN FULL STAINLESS STEEL***
**WITH PREMIUM 2 YEAR ONSITE WARRANTY**

Designed, fully assembled and individually bench tested in Australia.

* All rubber components on our stainless steel products are nitrile butadiene rubber.

Lead Free AS 3718 23145

## Variable Spray Gun

Equipped with our unique variable spray gun, making it easy to adjust the intensity of the spray, 3monkeez® pre-rinse units also offer versatility and adaptability, being the highest quality tapware solution available.








3monkeez.com.au

# CLEAN A JET®

STAINLESS STEEL

Certified System Quality ISO 9001 SAI GLOBAL

100% LEAD FREE STAINLESS STEEL

Lead Free

WATER RATING 4.5 litres per minute (spray tap) Licence No. 1044

10 YEAR WARRANTY INCLUDING 2 YEAR ONSITE SUPPORT

* Exclusions apply

## REIMAGINED PRE-RINSE UNIT AND SPRAY GUN

We have reimagined our trusted Pre-Rinse Units to provide a new and improved design that adapts to you and your needs. Equipped with an updated variable spray gun and fitted with a redesigned hose optimised to withstand rigorous commercial settings, this is the highest quality tapware solution available.



### INTUITIVE DESIGN

A carefully considered design positions the new lock and trigger for natural movement and comfort.




### ERGONOMIC GRIP

The reinvented handle fits to the shape of your hand and has added ridges for a comfortable and solid grip.

### VARIABLE SPRAY

A spray setting that adapts to you. Switch from a chisel jet to a shower spray with ease.



### FULLY ASSEMBLED

Individually bench tested and ready to install.

3monkeez®

innovate. create. deliver.

www.3monkeez.com.au
sales@3monkeez.com.au
02 9627 6111

# Commercial Tapware

Lead Free AS 3718 23145

WATER RATING 4.5 stars per minute Licence No. 1044

100% STAINLESS STEEL LEAD FREE

CLEANJET® STAINLESS STEEL


10 YEAR WARRANTY 10 2 YEAR ONSITE SUPPORT

## Dual Bench Mount Pre-Rinse Unit

**T-3M53007**

- Full S/S Construction
- Equipped with a Water Saving 6 Star 4.5LPM Variable Trigger Valve
- Fully Assembled and Bench Tested, with a Unique Traceable Serial Number
- Working Pressure Range 150kPa-500kPa
- Maximum Operating Temperature 80 Degrees



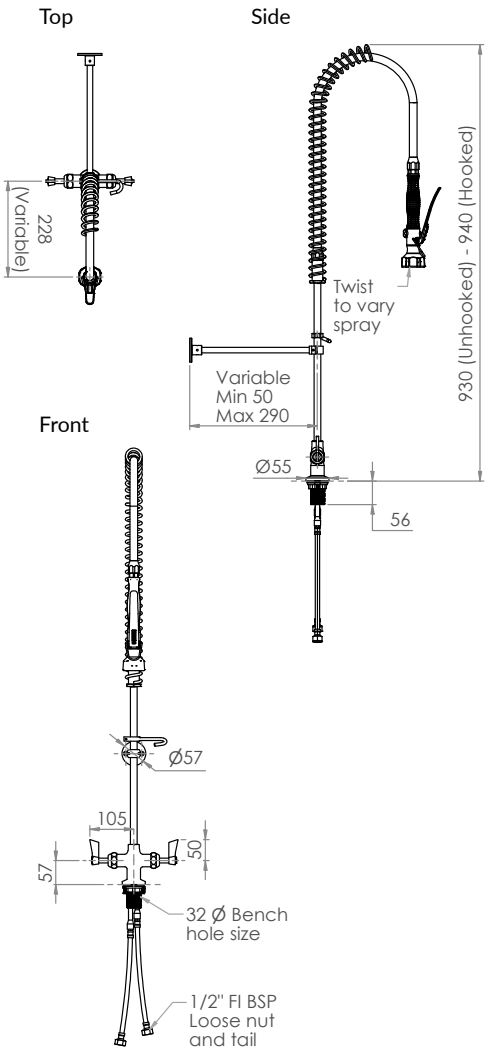


*Exclusions apply

3monkeez.com.au

# Commercial Tapware

Lead Free AS 3718 23145

WATER RATING 4.5 litres per minute

100% STAINLESS STEEL LEAD FREE

CLEANJET® STAINLESS STEEL


10 YEAR WARRANTY 10 2 YEAR ONSITE SUPPORT

## Compact Dual Bench Mount Pre-Rinse Unit


**T-3M53007-C**

- Full S/S Construction
- Compact Model Designed for Applications Where Space Saving is a Priority
- Equipped with a Water Saving 6 Star 4.5LPM Variable Trigger Valve
- Wall Bracket Included
- Fully Assembled and Bench Tested, with a Unique Traceable Serial Number
- Working Pressure Range 150kPa-500kPa
- Maximum Operating Temperature 80 Degrees

Top





Side

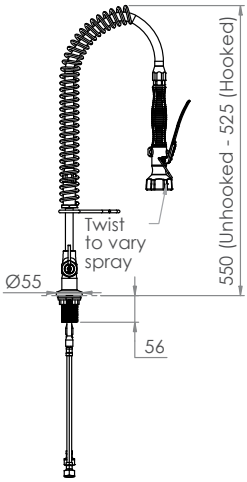




Front

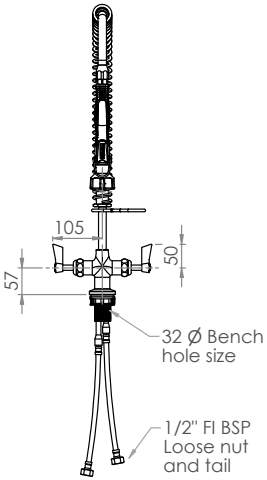


*Exclusions apply

3monkeez.com.au

## Dual Bench Mount Pre-Rinse Unit with Pot Filler


10 YEAR WARRANTY 10 2 YEAR ONSITE SUPPORT

**T-3M53015** – *6" pot filler*

**T-3M53058** – *12" pot filler*

- Full S/S Construction
- Equipped with a Water Saving 6 Star 4.5LPM Variable Trigger Valve
- Available with 6" or 12" Pot Filler – 4 Star 7.5LPM
- Fully Assembled and Bench Tested, with a Unique Traceable Serial Number
- Working Pressure Range 150kPa-500kPa
- Maximum Operating Temperature 80 Degrees



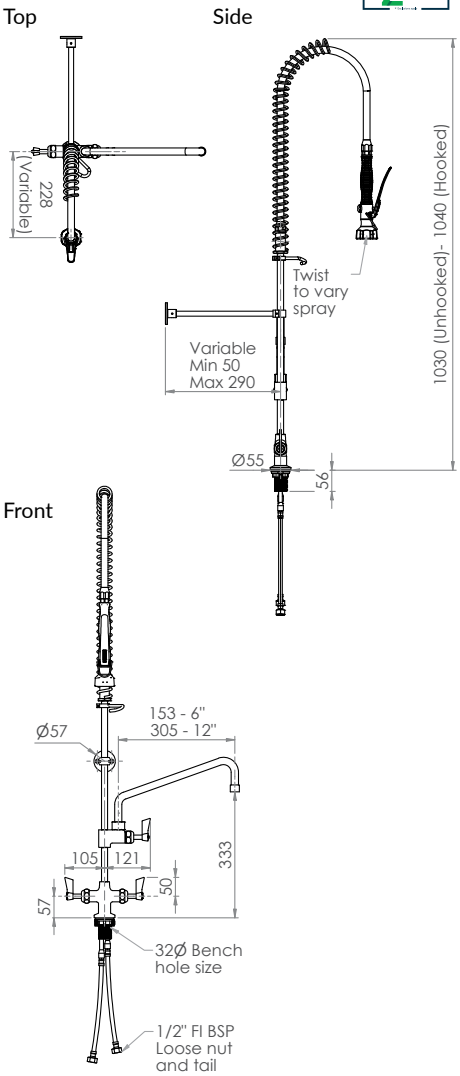


*Exclusions apply

# Commercial Tapware

Lead Free AS 3718 23145

WATER RATING 4.5 litres per minute (spray top) 4 star

100% STAINLESS STEEL LEAD FREE

CLEANJET® STAINLESS STEEL

10 YEAR WARRANTY 2 YEAR ONSITE SUPPORT

## Compact Dual Bench Mount Pre-Rinse with Pot Filler


**T-3M53015-C** – *6" pot filler*

**T-3M53058-C** – *12" pot filler*


- Full S/S Construction
- Compact Model Designed for Applications Where Space Saving is a Priority
- Equipped with a Water Saving 6 Star 4.5LPM Variable Trigger Valve
- Wall Bracket Included
- Available with 6" or 12" Pot Filler – 4 Star 7.5LPM
- Fully Assembled and Bench Tested, with a Unique Traceable Serial Number
- Working Pressure Range 150kPa-500kPa
- Maximum Operating Temperature 80 Degrees




Top




Side

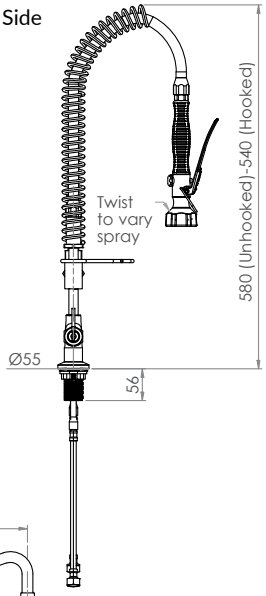


Front

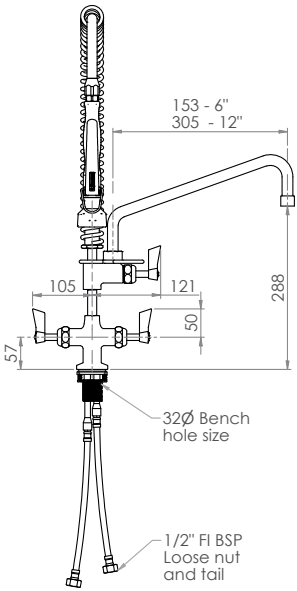


*Exclusions apply

3monkeez.com.au

# Commercial Tapware

Lead Free AS 3718 23145

WATER RATING 4.5 litres per minute Licence No. 1044

100% STAINLESS STEEL LEAD FREE

CLEANJET® STAINLESS STEEL

10 YEAR WARRANTY 10 2 YEAR ONSITE SUPPORT


## Single Bench Mount Pre-Rinse Unit

### T-3M53100


- Full S/S Construction
- Single Control Tap for Single Temperature, Cold or Pre-Mixed Water
- Equipped with a Water Saving 6 Star 4.5LPM Variable Trigger Valve
- Fully Assembled and Bench Tested, with a Unique Traceable Serial Number
- Working Pressure Range 150kPa-500kPa
- Maximum Operating Temperature 80 Degrees




Top




Side

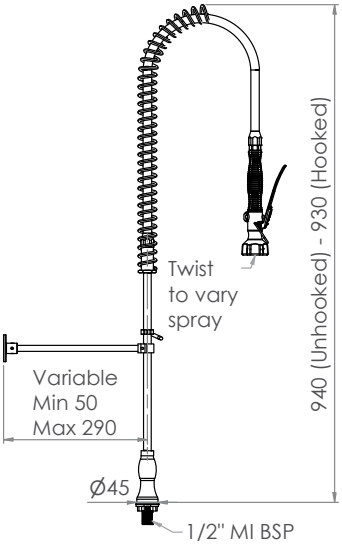


Front

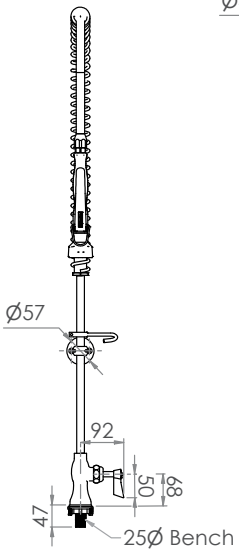


*Exclusions apply

3monkeez.com.au

# Commercial Tapware

Lead Free AS 3718 23145

WATER RATING 4.5 litres per minute Licence No. 1044

100% STAINLESS STEEL LEAD FREE

CLEANJET® STAINLESS STEEL

10 YEAR WARRANTY 10 2 YEAR ONSITE SUPPORT


## Compact Single Bench Mount Pre-Rinse Unit

**T-3M53100-C**


- Full S/S Construction
- Single Control Tap for Single Temperature, Cold or Pre-Mixed Water
- Compact Model Designed for Applications Where Space Saving is a Priority
- Equipped with a Water Saving 6 Star 4.5LPM Variable Trigger Valve
- Wall Bracket Included
- Fully Assembled and Bench Tested, with a Unique Traceable Serial Number
- Working Pressure Range 150kPa-500kPa
- Maximum Operating Temperature 80 Degrees




Top




Side

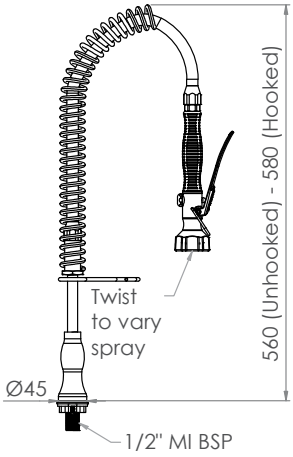


Front

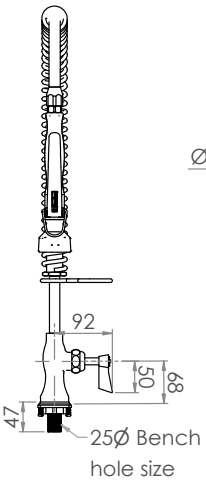


*Exclusions apply

3monkeez.com.au

Lead Free AS 3718 23145

WATER RATING 4.5 litres per minute (spray top) 4 star 7.5 litres per minute

100% STAINLESS STEEL LEAD FREE

CLEANJET® STAINLESS STEEL

10 YEAR WARRANTY 2 YEAR ONSITE SUPPORT

## Single Bench Mount Pre-Rinse Unit with Pot Filler


**T-3M53106** – *6" pot filler*

**T-3M53112** – *12" pot filler*


- Full S/S Construction
- Single Control Tap for Single Temperature, Cold or Pre-Mixed Water
- Equipped with a Water Saving 6 Star 4.5LPM Variable Trigger Valve
- Available with 6" or 12" Pot Filler – 4 Star 7.5LPM
- Fully Assembled and Bench Tested, with a Unique Traceable Serial Number
- Working Pressure Range 150kPa-500kPa
- Maximum Operating Temperature 80 Degrees




Top




Side

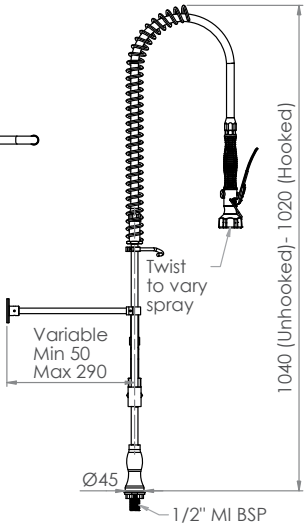


Front

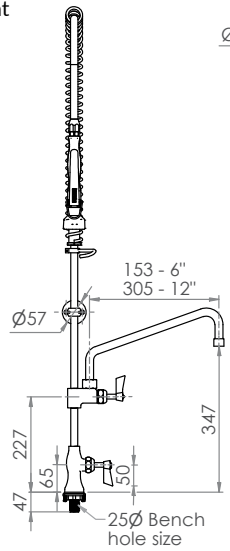


*Exclusions apply

# Commercial Tapware

Lead Free AS 3718 23145

WATER RATING 4.5 Stars per minute (Spray top) Licence No. 1044 Second outlet 4 star 7.5 litres per minute

100% STAINLESS STEEL LEAD FREE

CLEANJET® STAINLESS STEEL

## Compact Single Bench Mount Pre-Rinse Unit with Pot Filler


10 YEAR WARRANTY* 2 YEAR ONSITE SUPPORT

**T-3M53106-C** – *6" pot filler*


**T-3M53112-C** – *12" pot filler*

- Full S/S Construction
- Single Control Tap for Single Temperature, Cold or Pre-Mixed Water
- Compact Model Designed for Applications Where Space Saving is a Priority
- Equipped with a Water Saving 6 Star 4.5LPM Variable Trigger Valve
- Wall Bracket Included
- Available with 6" or 12" Pot Filler – 4 Star 7.5LPM
- Fully Assembled and Bench Tested, with a Unique Traceable Serial Number
- Working Pressure Range 150kPa-500kPa
- Maximum Operating Temperature 80 Degrees

Top





Side

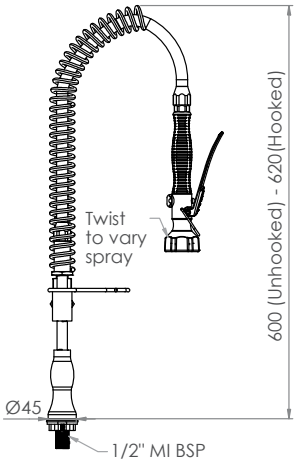




Front

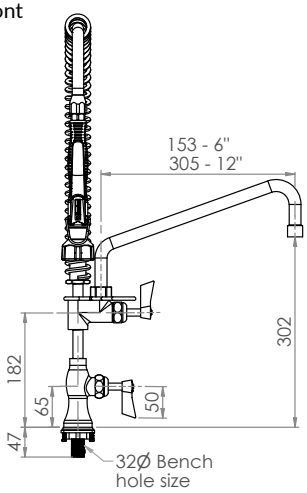


*Exclusions apply

3monkeez.com.au

Lead Free AS 3718 23145

WATER RATING 4.5 litres per minute Licence No. 1044

100% STAINLESS STEEL LEAD FREE


CLEANJET® STAINLESS STEEL

10 YEAR WARRANTY 2 YEAR ONSITE SUPPORT


## Bench Mount (No Stops) Pre-Rinse Unit

**T-3M53200**


- Full S/S Construction
- Equipped with a Water Saving 6 Star 4.5LPM Variable Trigger Valve
- Fully Assembled and Bench Tested, with a Unique Traceable Serial Number
- Working Pressure Range 150kPa-500kPa
- Maximum Operating Temperature 80 Degrees

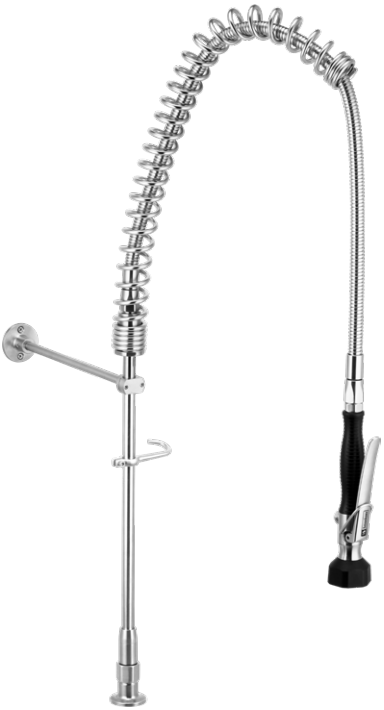


Top




Side

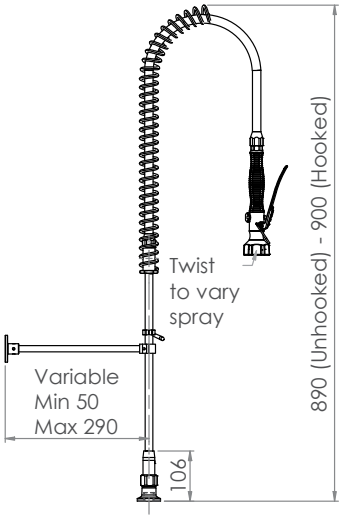


Front

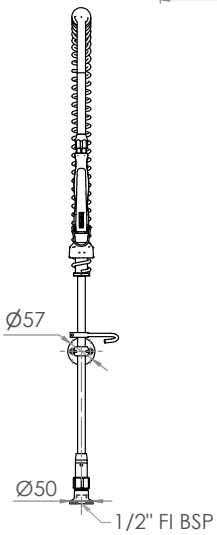


*Exclusions apply

Lead Free AS 3718 23145

WATER RATING 4.5 litres per minute (spray top) 4 star 7.5 litres per minute

100% STAINLESS STEEL LEAD FREE

CLEANJET® STAINLESS STEEL

10 YEAR WARRANTY 2 YEAR ONSITE SUPPORT

## Bench Mount (No Stops) Pre-Rinse Unit with Pot Filler


**T-3M53206** – *6" pot filler*

**T-3M53212** – *12" pot filler*


- Full S/S Construction
- Equipped with a Water Saving 6 Star 4.5LPM Variable Trigger Valve
- Available with 6" or 12" Pot Filler – 4 Star 7.5LPM
- Fully Assembled and Bench Tested, with a Unique Traceable Serial Number
- Working Pressure Range 150kPa-500kPa
- Maximum Operating Temperature 80 Degrees




Top




Side

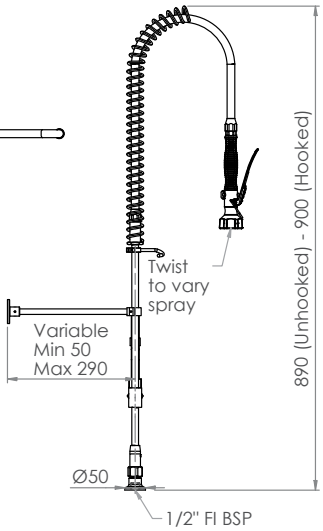


Front

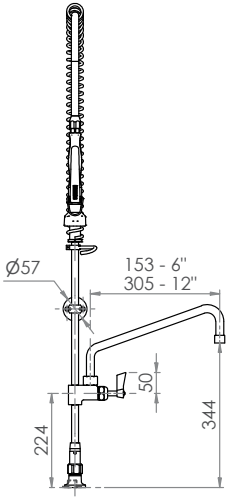


*Exclusions apply

3monkeez.com.au

Lead Free AS 3718 23145

WATER RATING 4.5 litres per minute Licence No. 1044

100% STAINLESS STEEL LEAD FREE

CLEANJET® STAINLESS STEEL

10 YEAR WARRANTY 10 INCLUDING 2 YEAR ONSITE SUPPORT


## Dual Bench Mount Pre Rinse Unit with Line Retractor

**T-3M53500**


- Full S/S Construction
- Comes Complete with a Line Retractor, with 1800mm Cable
- Equipped with a Water Saving 6 Star 4.5LPM Variable Trigger Valve
- Fully Assembled and Bench Tested, with a Unique Traceable Serial Number
- Working Pressure Range 150kPa-500kPa
- Maximum Operating Temperature 80 Degrees




Top




Side

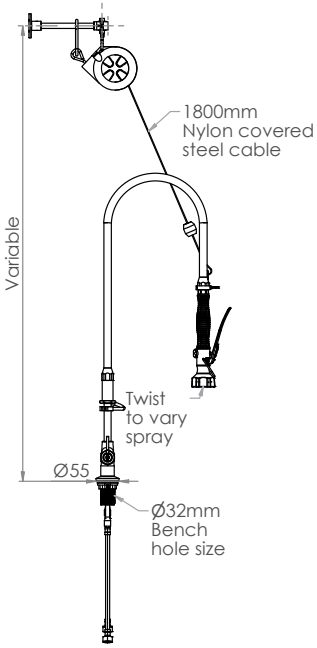


Front

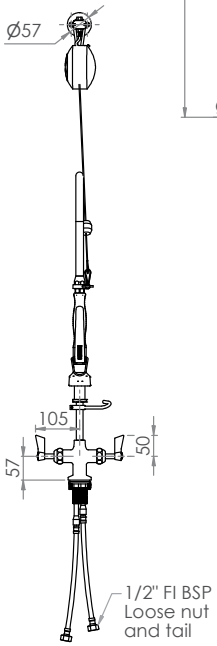


*Exclusions apply

3monkeez.com.au

# Commercial Tapware

Lead Free AS 3718 23145

WATER RATING 4.5 litres per minute (spray top) 4 star 7.5 litres per minute

100% STAINLESS STEEL LEAD FREE

CLEANAJET® STAINLESS STEEL

10 YEAR WARRANTY 2 YEAR ONSITE SUPPORT


## Dual Bench Pre Rinse Unit with Line Retractor and Pot Filler

**T-3M53506** – *6" pot filler*

**T-3M53512** – *12" pot filler*

- Full S/S Construction
- Comes Complete with a Line Retractor, with 1800mm Cable
- Equipped with a Water Saving 6 Star 4.5LPM Variable Trigger Valve
- Available with 6" or 12" Pot Filler – 4 Star 7.5LPM
- Fully Assembled and Bench Tested, with a Unique Traceable Serial Number
- Working Pressure Range 150kPa-500kPa
- Maximum Operating Temperature 80 Degrees



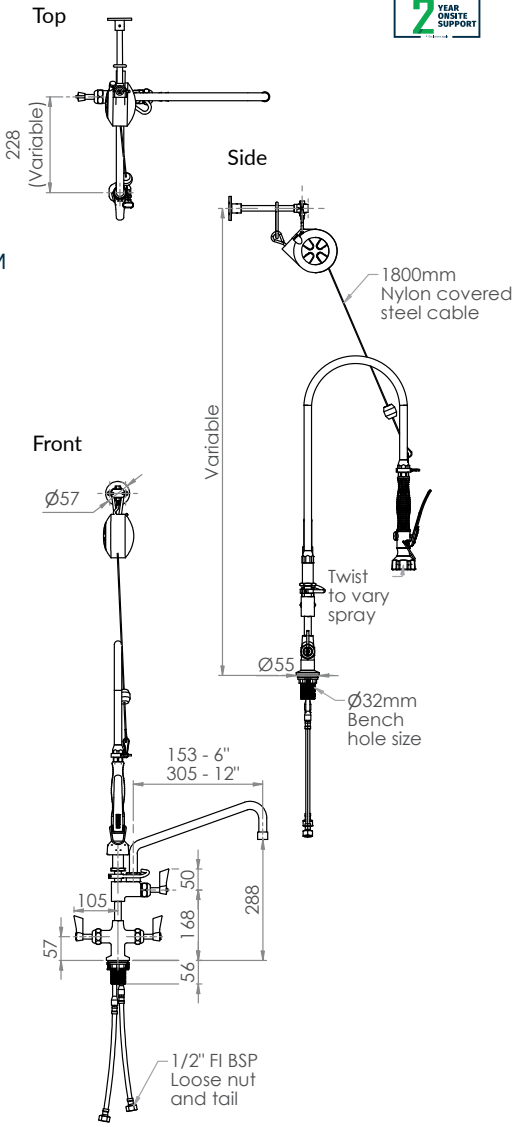


*Exclusions apply

3monkeez.com.au

# Commercial Tapware

Lead Free AS 3718 23145

WATER RATING 4.5 litres per minute

100% STAINLESS STEEL LEAD FREE

CLEANAJET® STAINLESS STEEL

10 YEAR WARRANTY 2 YEAR ONSITE SUPPORT


## Exposed Wall Mount Pre-Rinse Unit

**T-3M53430**


- Full S/S Construction
- Equipped with a Water Saving 6 Star 4.5LPM Variable Trigger Valve
- Fully Assembled and Bench Tested, with a Unique Traceable Serial Number
- Working Pressure Range 150kPa-500kPa
- Maximum Operating Temperature 80 Degrees




Top




Side

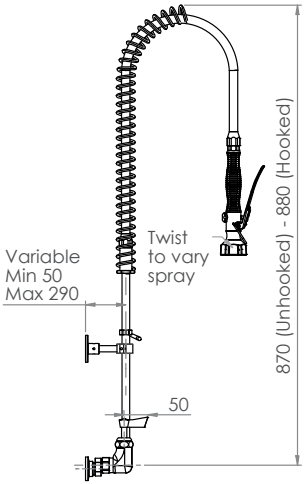


Front

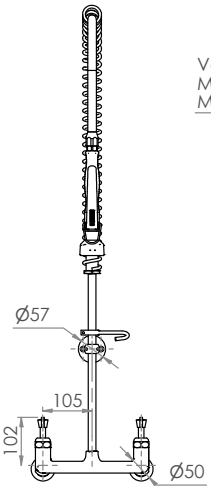


*Exclusions apply

3monkeez.com.au

Lead Free AS 3718 23145

WATER RATING 4.5 litres per minute Licence No. 1044

100% STAINLESS STEEL LEAD FREE

CLEANJET® STAINLESS STEEL

10 YEAR WARRANTY 10 IN TOTAL 2 YEAR ONSITE SUPPORT


## Compact Exposed Wall Mount Pre-Rinse Unit

**T-3M53430-C**


- Full S/S Construction
- Compact Model Designed for Applications Where Space Saving is a Priority
- Equipped with a Water Saving 6 Star 4.5LPM Variable Trigger Valve
- Wall Bracket Included
- Fully Assembled and Bench Tested, with a Unique Traceable Serial Number
- Working Pressure Range 150kPa-500kPa
- Maximum Operating Temperature 80 Degrees




Side

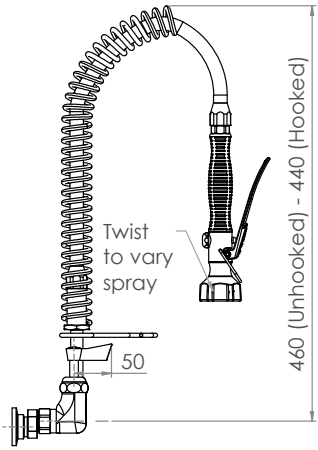


Front

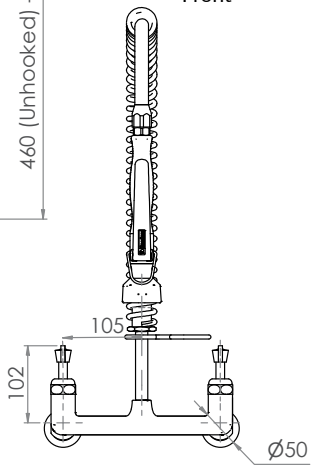


Top

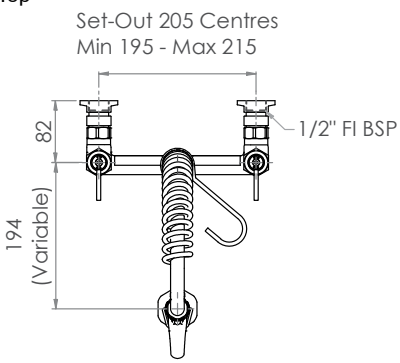


*Exclusions apply

# Commercial Tapware

Lead Free AS 3718 23145

WATER RATING 4.5 Stars per minute (spray top) 4 star 7.5 litres per minute

100% STAINLESS STEEL LEAD FREE

CLEANJET® STAINLESS STEEL

## Exposed Wall Mount Pre-Rinse Unit with Pot Filler

10 YEAR WARRANTY 10 2 YEAR ONSITE SUPPORT


**T-3M53449** – *6" pot filler*

**T-3M53473** – *12" pot filler*


- Full S/S Construction
- Equipped with a Water Saving 6 Star 4.5LPM Variable Trigger Valve
- Available with 6" or 12" Pot Filler – 4 Star 7.5LPM
- Fully Assembled and Bench Tested, with a Unique Traceable Serial Number
- Working Pressure Range 150kPa-500kPa
- Maximum Operating Temperature 80 Degrees




Top




Side

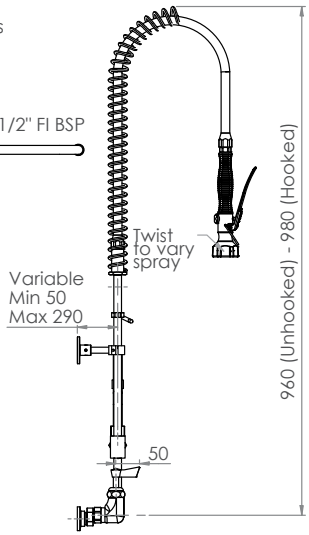


Front

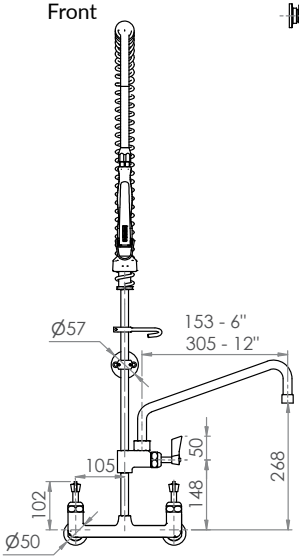


*Exclusions apply

3monkeez.com.au

# Commercial Tapware

Lead Free AS 3718 23145

WATER RATING 4.5 Stars per minute 4 star 7.5 litres per minute

100% STAINLESS STEEL LEAD FREE

CLEANJET® STAINLESS STEEL

10 YEAR WARRANTY 2 YEAR ONSITE SUPPORT

## Compact Exposed Wall Mount Pre-Rinse Unit with Pot Filler


**T-3M53449-C** – *6" pot filler*

**T-3M53473-C** – *12" pot filler*


- Full S/S Construction
- Compact Model Designed for Applications Where Space Saving is a Priority
- Equipped with a Water Saving 6 Star 4.5LPM Variable Trigger Valve
- Wall Bracket Included
- Available with 6" or 12" Pot Filler – 4 Star 7.5LPM
- Fully Assembled and Bench Tested, with a Unique Traceable Serial Number
- Working Pressure Range 150kPa-500kPa
- Maximum Operating Temperature 80 Degrees




Top

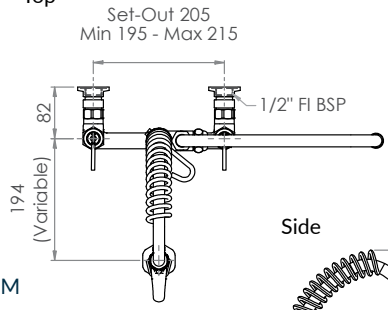


Side

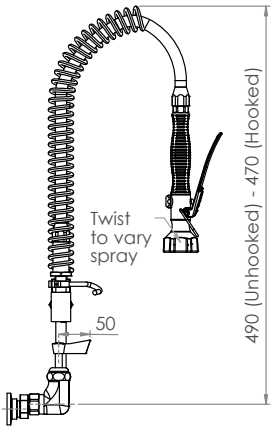


Front

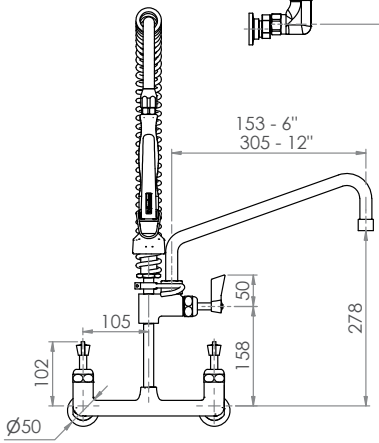


*Exclusions apply

# Commercial Tapware

Lead Free AS 3718 23145

WATER RATING 4.5 litres per minute

100% STAINLESS STEEL LEAD FREE

CLEANJET® STAINLESS STEEL

10 YEAR WARRANTY 10 2 YEAR ONSITE SUPPORT


## Single Wall Mount Pre-Rinse Unit

**T-3M53700**


- Full S/S Construction
- Single Control Tap for Single Temperature, Cold or Pre-Mixed Water
- Equipped with a Water Saving 6 Star 4.5LPM Variable Trigger Valve
- Fully Assembled and Bench Tested, with a Unique Traceable Serial Number
- Working Pressure Range 150kPa-500kPa
- Maximum Operating Temperature 80 Degrees




Side

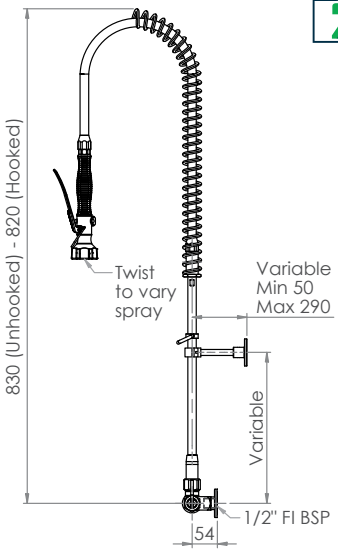


Front

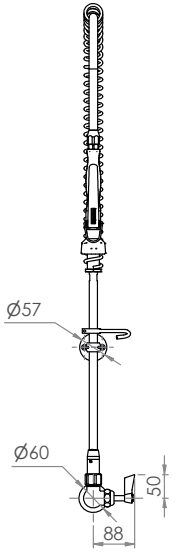


Top




*Exclusions apply

3monkeez.com.au

# Commercial Tapware

Lead Free AS 3718 23145

WATER RATING 4.5 litres per minute Licence No. 1044

100% STAINLESS STEEL LEAD FREE

CLEANJET® STAINLESS STEEL


10 YEAR WARRANTY 2 YEAR ONSITE SUPPORT

## Compact Single Wall Mount Pre-Rinse Unit


**T-3M53700-C**

- Full S/S Construction
- Single Control Tap for Single Temperature, Cold or Pre-Mixed Water
- Equipped with a Water Saving 6 Star 4.5LPM Variable Trigger Valve
- Compact Model Designed for Applications Where Space Saving is a Priority
- Wall Bracket Included
- Fully Assembled and Bench Tested, with a Unique Traceable Serial Number
- Working Pressure Range 150kPa-500kPa
- Maximum Operating Temperature 80 Degrees

Top





Side

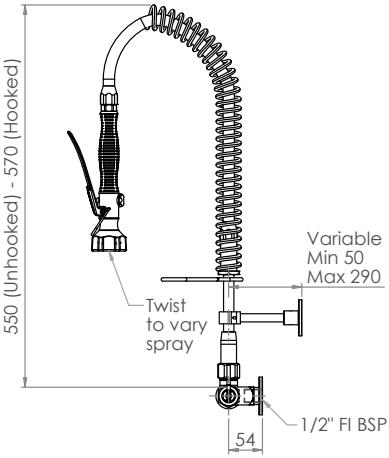




Front

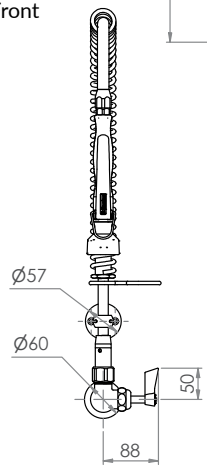


*Exclusions apply

3monkeez.com.au

# Commercial Tapware

Lead Free AS 3718 23145

WATER RATING 4.5 Stars per minute (spray top) Licence No. 1044 Second outlet 4 star 7.5 litres per minute

100% STAINLESS STEEL LEAD FREE

CLEANJET® STAINLESS STEEL

## Single Wall Mount Pre-Rinse Unit with Pot Filler

10 YEAR WARRANTY 10 INCLUDING 2 YEAR ONSITE SUPPORT


**T-3M53706** – *6" pot filler*

**T-3M53712** – *12" pot filler*


- Full S/S Construction
- Single Control Tap for Single Temperature, Cold or Pre-Mixed Water
- Equipped with a Water Saving 6 Star 4.5LPM Variable Trigger Valve
- Available with 6" or 12" Pot Filler – 4 Star 7.5LPM
- Fully Assembled and Bench Tested, with a Unique Traceable Serial Number
- Working Pressure Range 150kPa-500kPa
- Maximum Operating Temperature 80 Degrees




Side

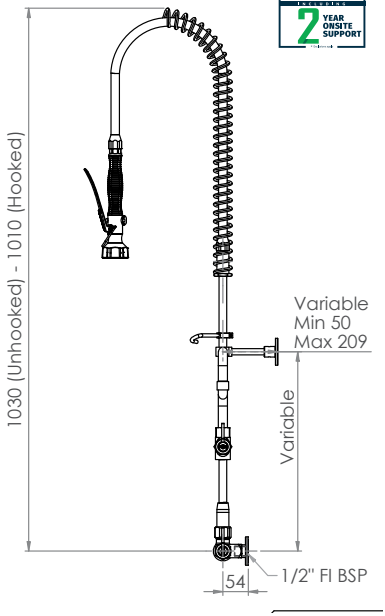


Front

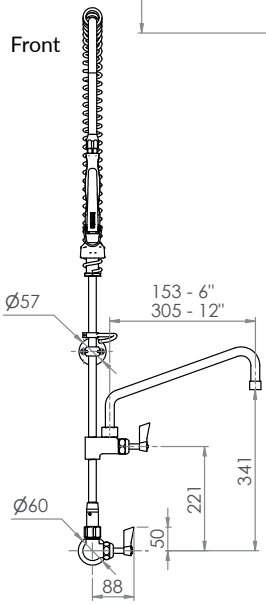


Top




*Exclusions apply

3monkeez.com.au

Lead Free AS 3718 23145

WATER RATING 4.5 Stars per minute (spray type) 4 star 7.5 litres per minute

100% STAINLESS STEEL LEAD FREE

CLEANJET® STAINLESS STEEL

10 YEAR WARRANTY 2 YEAR ONSITE SUPPORT

## Compact Single Wall Mount Pre-Rinse Unit with Pot Filler


**T-3M53706-C** – *6" pot filler*

**T-3M53712-C** – *12" pot filler*


- Full S/S Construction
- Single Control Tap for Single Temperature, Cold or Pre-Mixed Water
- Equipped with a Water Saving 6 Star 4.5LPM Variable Trigger Valve
- Compact Model Designed for Applications Where Space Saving is a Priority
- Wall Bracket Included
- Available with 6" or 12" Pot Filler – 4 Star 7.5LPM
- Fully Assembled and Bench Tested, with a Unique Traceable Serial Number
- Working Pressure Range 150kPa-500kPa
- Maximum Operating Temperature 80 Degrees




Top




Side

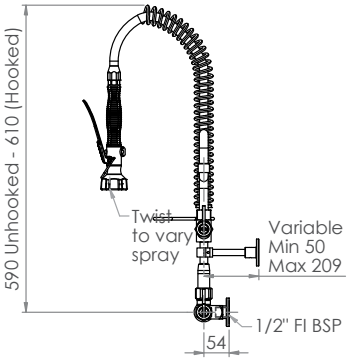


Front

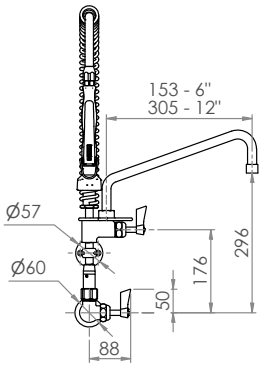


*Exclusions apply

# Commercial Tapware

Lead Free AS 3718 23145

WATER RATING 4.5 litres per minute Licence No. 1044

CLEANJET® STAINLESS STEEL

10 YEAR WARRANTY 10 INTERNAL 2 YEAR ONSITE SUPPORT


## Wall Stops & Elbow Pre-Rinse Unit

**T-3M53810**


- Full S/S Construction
- Wall Elbow and Lever Handle Wall Top Assemblies, ¼ Turn Ceramic Disc. Stainless Steel Outer with Brass Internals to Suit Concealed Breech
- Equipped with a Water Saving 6 Star 4.5LPM Variable Trigger Valve
- Fully Assembled and Bench Tested, with a Unique Traceable Serial Number
- Working Pressure Range 150kPa-500kPa
- Maximum Operating Temperature 80 Degrees




Top




Front

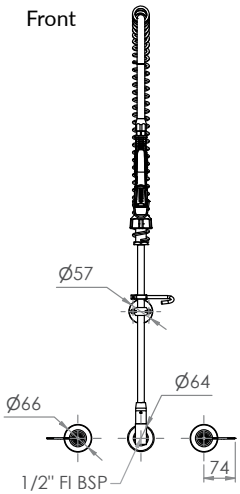


Side

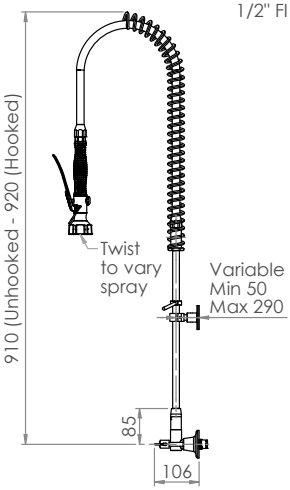


*Exclusions apply

3monkeez.com.au

Lead Free AS 3718 23145

WATER RATING 4.5 litres per minute Licence No. 1044

CLEAN A JET® STAINLESS STEEL


10 YEAR WARRANTY 10 2 YEAR ONSITE SUPPORT

## Compact Wall Stops & Elbow Pre-Rinse Unit


**T-3M53810-C**

- Full S/S Construction
- Compact Model Designed for Applications Where Space Saving is a Priority
- Wall Elbow and Lever Handle Wall Top Assemblies, ¼ Turn Ceramic Disc. Stainless Steel Outer with Brass Internals to Suit Concealed Breech
- Equipped with a Water Saving 6 Star 4.5LPM Variable Trigger Valve
- Wall Bracket Included
- Fully Assembled and Bench Tested, with a Unique Traceable Serial Number
- Working Pressure Range 150kPa-500kPa
- Maximum Operating Temperature 80 Degrees

Top





Front

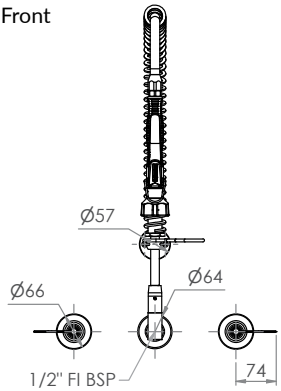




Side

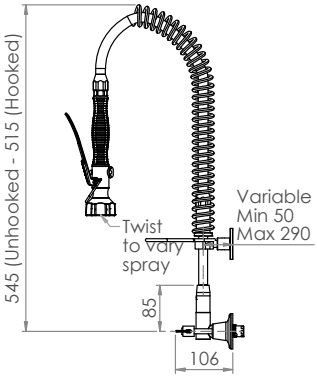


*Exclusions apply

3monkeez.com.au

Lead Free AS 3718 23145

WATER RATING 4.5 litres per minute (spray top) 4 star 7.5 litres per minute

CLEANAJET® STAINLESS STEEL

10 YEAR WARRANTY 10 2 YEAR ONSITE SUPPORT

## Wall Stops & Elbow Pre-Rinse Unit with Pot Filler


**T-3M53816** – *6" pot filler*

**T-3M53822** – *12" pot filler*


- Full S/S Construction
- Wall Elbow and Lever Handle Wall Top Assemblies, ¼ Turn Ceramic Disc. Stainless Steel Outer with Brass Internals to Suit Concealed Breech
- Equipped with a Water Saving 6 Star 4.5LPM Variable Trigger Valve
- Available with 6" or 12" Pot Filler – 4 Star 7.5LPM
- Fully Assembled and Bench Tested, with a Unique Traceable Serial Number
- Working Pressure Range 150kPa-500kPa
- Maximum Operating Temperature 80 Degrees




Top




Side

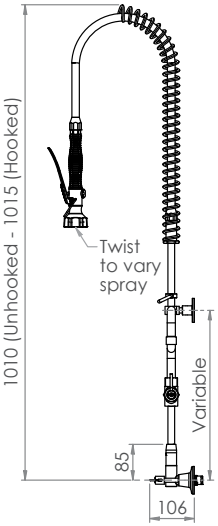


Front

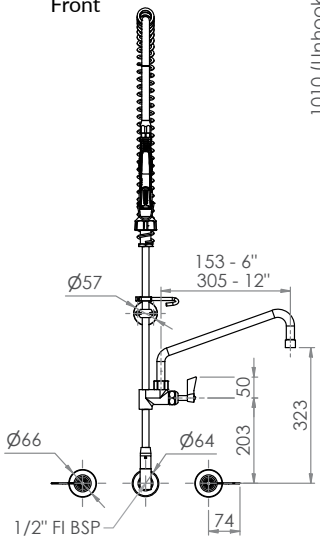


*Exclusions apply

3monkeez.com.au

# Commercial Tapware

Lead Free AS 3718 23145

WATER RATING 4.5 litres per minute (spray top) 4 star 7.5 litres per minute

CLEANJET® STAINLESS STEEL

10 YEAR WARRANTY 10 2 YEAR ONSITE SUPPORT

## Compact Wall Stops & Elbow Pre-Rinse Unit with Pot Filler


**T-3M53816-C** – *6" pot filler*

**T-3M53822-C** – *12" pot filler*


- Full S/S Construction
- Available with 6" or 12" Pot Filler – 4 Star 7.5LPM
- Compact Model Designed for Applications Where Space Saving is a Priority
- Wall Elbow and Lever Handle Wall Top Assemblies, ¼ Turn Ceramic Disc. Stainless Steel Outer with Brass Internals to Suit Concealed Breech
- Equipped with a Water Saving 6 Star 4.5LPM Variable Trigger Valve
- Wall Bracket Included
- Fully Assembled and Bench Tested, with a Unique Traceable Serial Number
- Working Pressure Range 150kPa-500kPa
- Maximum Operating Temperature 80 Degrees




Top




Side

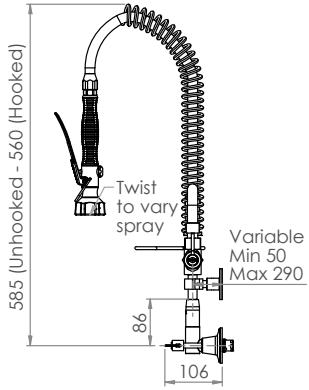


Front

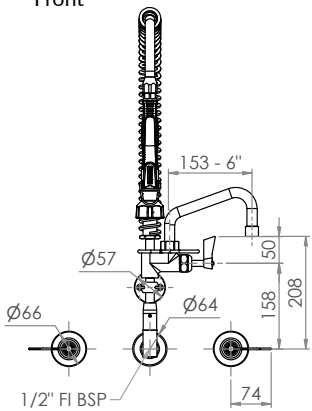


*Exclusions apply

3monkeez.com.au

# Commercial Tapware

Lead Free AS 3718 23145

100% STAINLESS STEEL LEAD FREE

GUARDIAN® TAPWARE

## Guardian Range

The 3monkeez® Guardian Tapware® range has been specially engineered to withstand the rigors of any commercial application. This range offers products manufactured from 100% stainless steel, to bring you reliable, clean and attractive products that protect your health and provide a lifetime of satisfaction.

From sink mixers to bottle fillers, there is bound to be a product to suit your next project.







**FIRST IN FULL STAINLESS STEEL WITH PREMIUM 2 YEAR WARRANTY**

Designed, fully assembled and individually bench tested in Australia.



## Product Solutions

The robust and durable design of 3monkeez® range of laboratory and commercial use tapware sets them apart from standard mixers and taps. Constructed from durable stainless steel, these taps can withstand the rigors of commercial environments, ideal for application in schools, laboratories and restaurants.

## Dual Bench Mount Body with Spout

10 YEAR WARRANTY 2 YEAR ONSITE SUPPORT


**T-3MDH06** – *6" spout*

**T-3MDH08** – *8" spout*

**T-3MDH12** – *12" spout*

- Full S/S Construction
- Dual Bench Tap Body Includes Inlet Hoses
- Available with a 6", 8" or 12" Spout – 3 Star 8LPM
- Working Pressure Range 150kPa-500kPa
- Maximum Operating Temperature 80 Degrees



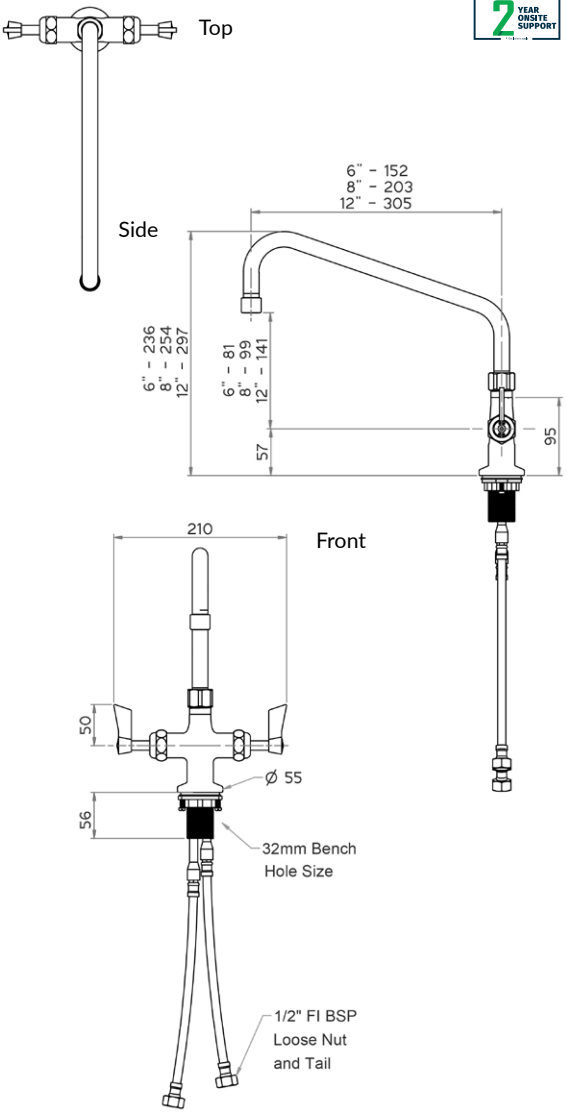


*Exclusions apply

## Single Bench Mount Body with Spout


10 YEAR WARRANTY 2 YEAR ONSITE SUPPORT

**T-3MSH06** – *6" spout*
**T-3MSH08** – *8" spout*
**T-3MSH12** – *12" spout*


- Full S/S Construction
- Single Control Tap for Single Temperature, Cold or Pre-Mixed Water
- ½" MI BSP Inlet
- Available with a 6", 8" or 12" Spout – 3 Star 8LPM
- Working Pressure Range 150kPa-500kPa
- Maximum Operating Temperature 80 Degrees




Top

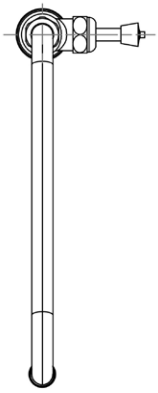

Front

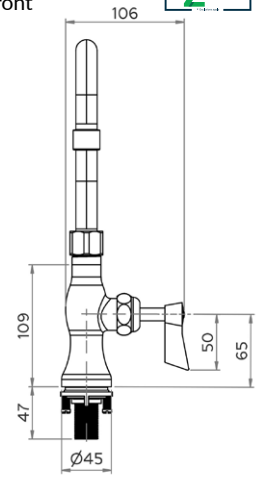


Side

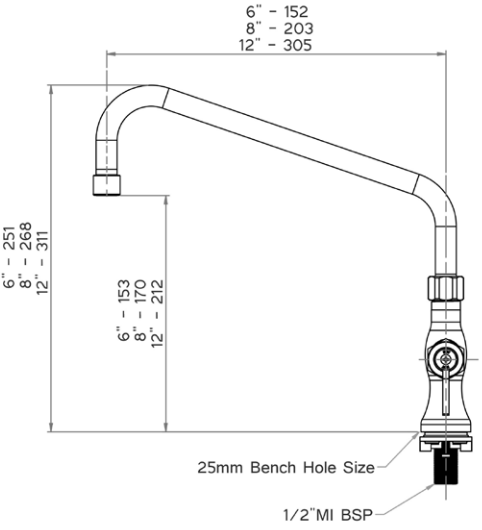


*Exclusions apply

# Commercial Tapware

Lead Free AS 3718 23145

WATER RATING 8.0 litres per minute

100% STAINLESS STEEL LEAD FREE

GUARDIAN® TAPWARE


## Bench Mount and Basin Stops with Spout

10 YEAR WARRANTY* 2 YEAR ONSITE SUPPORT

**T-3MHS06** – *6" spout*
**T-3MHS08** – *8" spout*
**T-3MHS12** – *12" spout*


- Stainless Steel Spout and Bench Mount
- Lever Handle Assemblies, ¼ Turn Ceramic Disc. Stainless Steel Outer with Brass Internals
- Available with a 6", 8" or 12" Spout – 3 Star 8LPM
- Working Pressure Range 150kPa-500kPa
- Maximum Operating Temperature 80 Degrees

Top

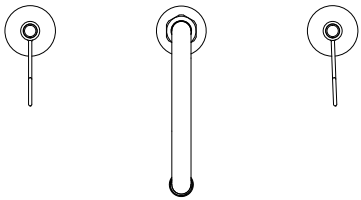




Side




Front

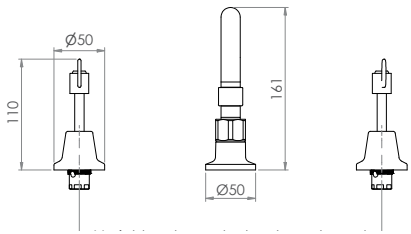


*Exclusions apply

3monkeez.com.au


## Bench Mount (no stops) with Spout


10 YEAR WARRANTY 2 YEAR ONSITE SUPPORT

**T-3MHO06** – *6" spout*
**T-3MHO08** – *8" spout*
**T-3MHO12** – *12" spout*


- Full S/S Construction
- Bench Mount (No Stops) with ½" FI BSP Inlet
- Available with a 6", 8" or 12" Spout – 3 Star 8LPM
- Working Pressure Range 150kPa-500kPa
- Maximum Operating Temperature 80 Degrees





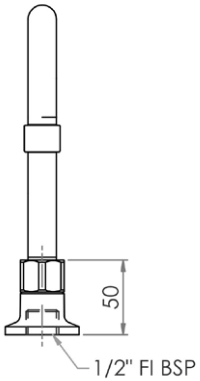
Side

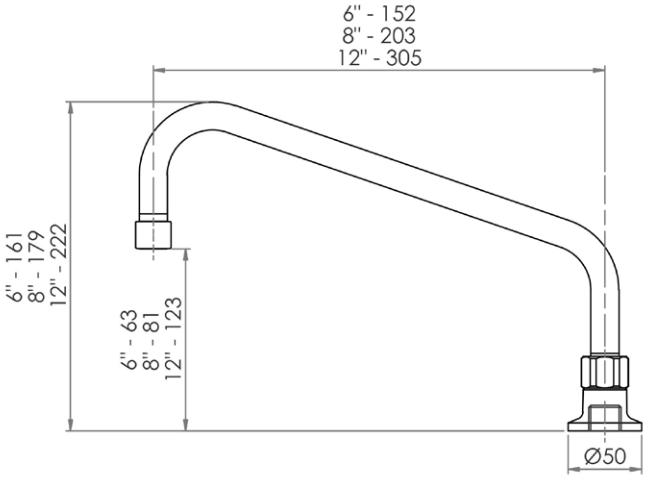


*Exclusions apply

# Commercial Tapware

Lead Free AS 3718 23145

WATER RATING 8.0 litres per minute Licence No. 1044

100% STAINLESS STEEL LEAD FREE


GUARDIAN® TAPWARE


10 YEAR WARRANTY 2 YEAR ONSITE SUPPORT

## Exposed Wall Mount Body with Spout


**T-3MEW06** – *6" spout*
**T-3MEW08** – *8" spout*
**T-3MEW12** – *12" spout*


- Full S/S Construction
- Exposed Wall Mount Tap Body Including Spreaders and ½ Turn Rising Spindles
- Available with a 6", 8" or 12" Spout – 3 Star 8LPM
- Working Pressure Range 150kPa-500kPa
- Maximum Operating Temperature 80 Degrees

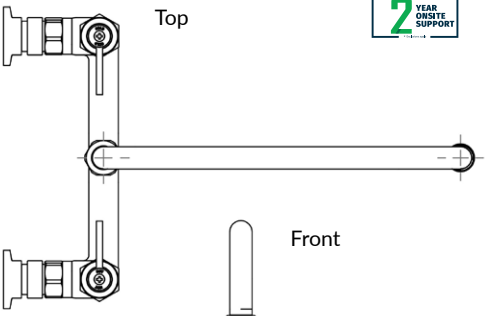

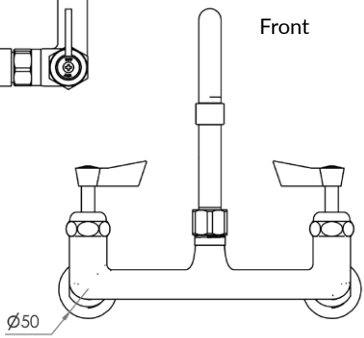


*Exclusions apply

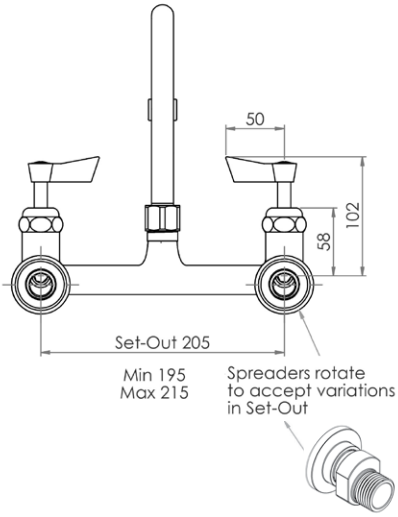3monkeez.com.au
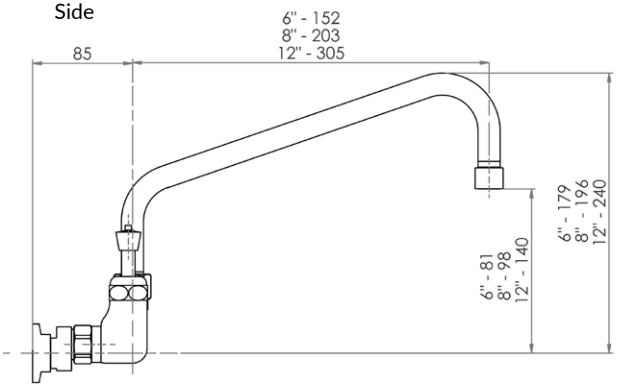
# Commercial Tapware

Lead Free AS 3718 23145

WATER RATING 8.0 litres per minute

100% STAINLESS STEEL LEAD FREE

GUARDIAN® TAPWARE

10 YEAR WARRANTY 10 2 YEAR ONSITE SUPPORT


## Single Wall Mount Body with Spout

**T-3MSW06** – *6" spout*
**T-3MSW08** – *8" spout*
**T-3MSW12** – *12" spout*


- Full S/S Construction
- Single Control Tap for Single Temperature, Cold or Pre-Mixed Water
- ½" FI BSP Inlet
- Available with a 6", 8" or 12" Spout – 3 Star 8LPM
- Working Pressure Range 150kPa-500kPa
- Maximum Operating Temperature 80 Degrees




Top

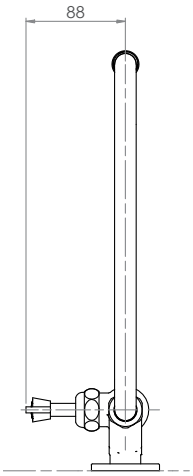


Front




Side

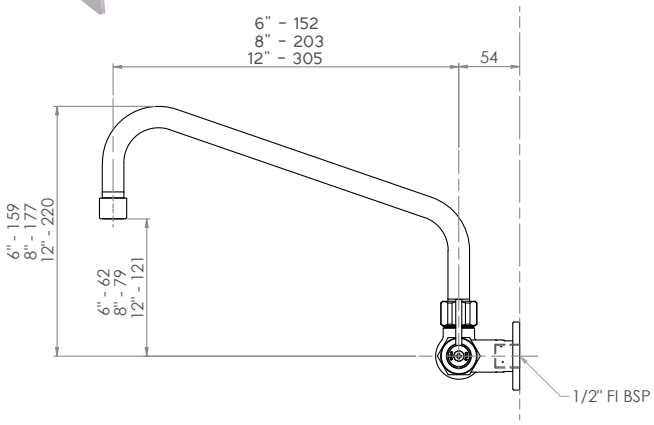


*Exclusions apply

3monkeez.com.au

## Wall Stops and Elbow with Spout

10 YEAR WARRANTY 2 YEAR ONSITE SUPPORT

**T-3MCW06** – *6" spout*

**T-3MCW08** – *8" spout*


**T-3MCW12** – *12" spout*

- Stainless Steel Spout and Wall Elbow
- Wall Elbow with ½" FI BSP Inlet
- Wall Elbow and Lever Handle Wall Top Assemblies,
  ¼ Turn Ceramic Disc. Stainless Steel Outer with Brass Internals to Suit Concealed Breech
- Available with a 6", 8" or 12" Spout – 3 Star 8LPM
- Working Pressure Range 150kPa-500kPa
- Maximum Operating Temperature 80 Degrees







Top

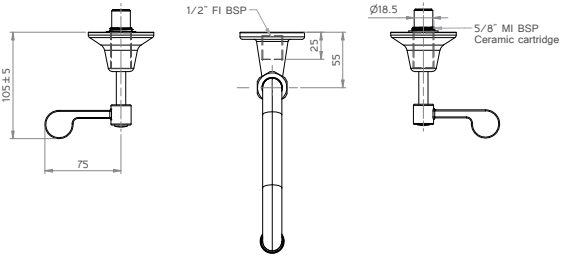


Front

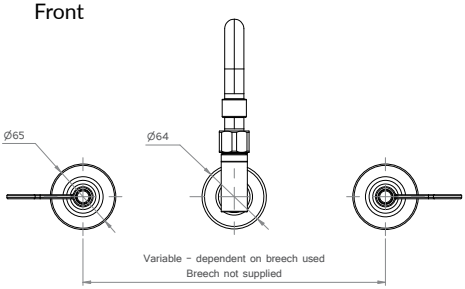


Side

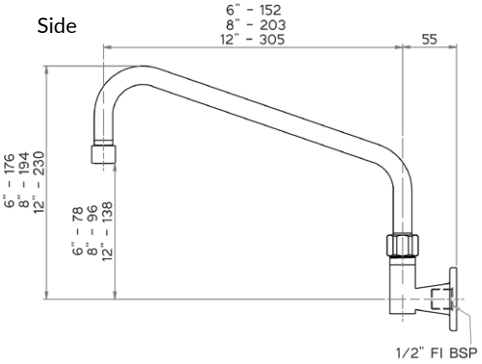


*Exclusions apply


## Wall Elbow with Spout

10 YEAR WARRANTY 2 YEAR ONSITE SUPPORT


**T-3MWE06** – *6" spout*
**T-3MWE08** – *8" spout*
**T-3MWE12** – *12" spout*

- Full S/S Construction
- Wall Elbow with ½" FI BSP Inlet
- Available with a 6", 8" or 12" Spout – 3 Star 8LPM
- Working Pressure Range 150kPa-500kPa
- Maximum Operating Temperature 80 Degrees

Top




Front






Side

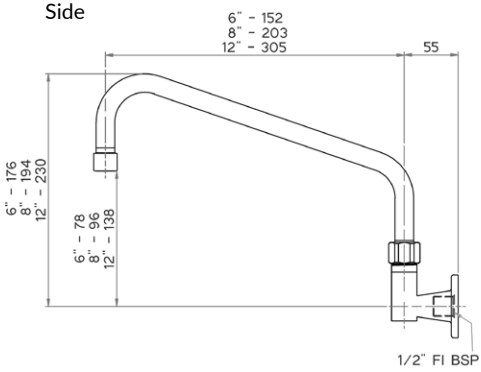


*Exclusions apply

## Dual Bench Mount Body with Gooseneck Swivel Spout

10 YEAR WARRANTY 2 YEAR ONSITE SUPPORT


**T-3MDHG07** – *7" spout*

**T-3MDHG12** – *12" spout*


- Full S/S Construction
- Dual Bench Mount Tap Body Includes Inlet Hoses
- Available with a 7" or 12" Gooseneck Spout – 4 Star 7.5LPM
- Working Pressure Range 150kPa-500kPa
- Maximum Operating Temperature 80 Degrees




Side

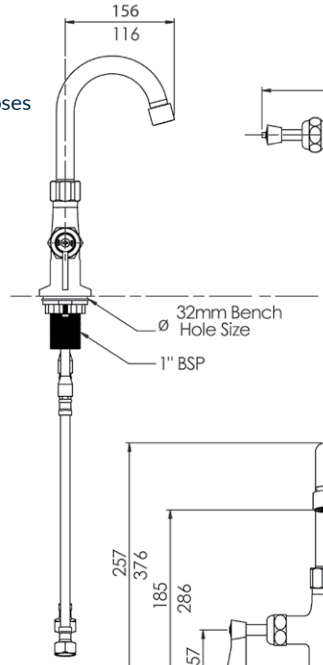


Top




Front

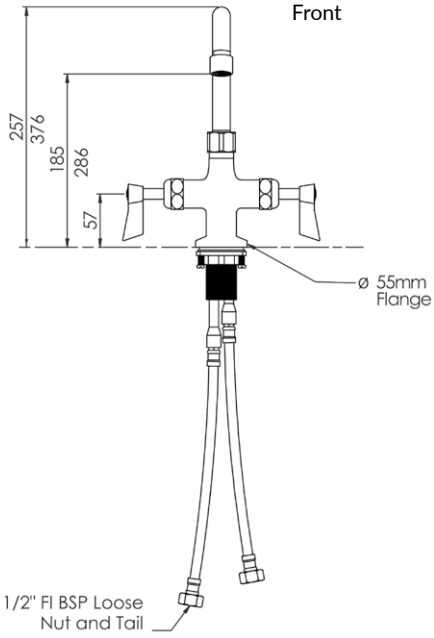


*Exclusions apply

## Single Bench Mount Body with Gooseneck Swivel Spout


10 YEAR WARRANTY 2 YEAR ONSITE SUPPORT

**T-3MSHG07** – *7" spout*


**T-3MSHG12** – *12" spout*

- Full S/S Construction
- Single Control Tap for Single Temperature, Cold or Pre-Mixed Water
- ½" MI BSP Inlet
- Available with a 7" or 12" Gooseneck Spout – 4 Star 7.5LPM
- Working Pressure Range 150kPa-500kPa
- Maximum Operating Temperature 80 Degrees

Top





Side

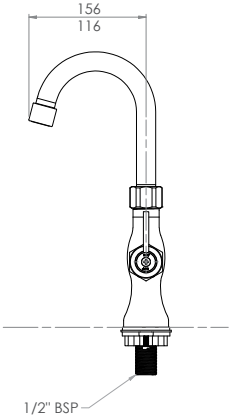




Front




*Exclusions apply

## Bench Mount (No Stops) with Gooseneck Swivel Spout

10 YEAR WARRANTY 2 YEAR ONSITE SUPPORT


**T-3MHOG07** – *7" spout*

**T-3MHOG12** – *12" spout*


- Full S/S Construction
- Bench Mount (No Stops) with ½" FI BSP Inlet
- Available with a 7" or 12" Gooseneck Spout – 4 Star 7.5LPM
- Working Pressure Range 150kPa-500kPa
- Maximum Operating Temperature 80 Degrees




Top




Front

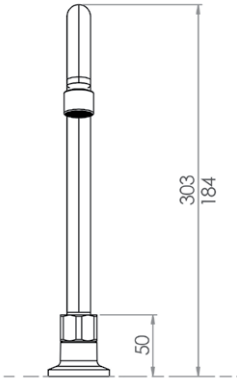


Side

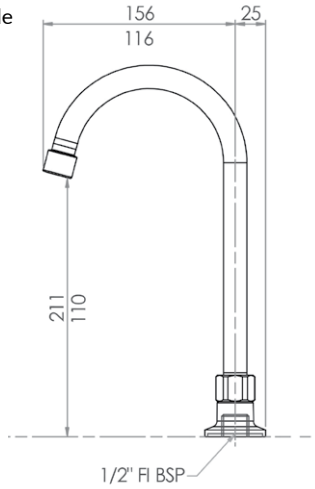


*Exclusions apply

## Exposed Wall Mount Body with Gooseneck Swivel Spout

10 YEAR WARRANTY 2 YEAR ONSITE SUPPORT


**T-3MEWG07** – *7" spout*

**T-3MEWG12** – *12" spout*


- Full S/S Construction
- Exposed Wall Mount Tap Body Including Spreaders and ½ Turn Rising Spindles
- Available with a 7" or 12" Gooseneck Spout – 4 Star 7.5LPM
- Working Pressure Range 150kPa-500kPa
- Maximum Operating Temperature 80 Degrees




Top

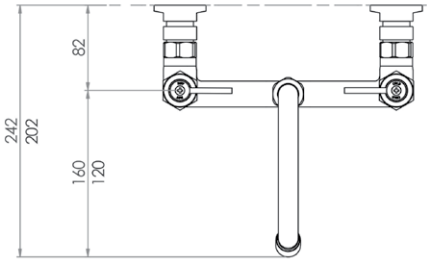


Side

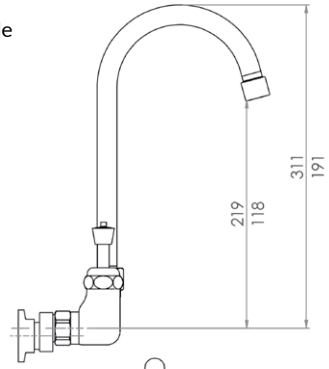


Rear

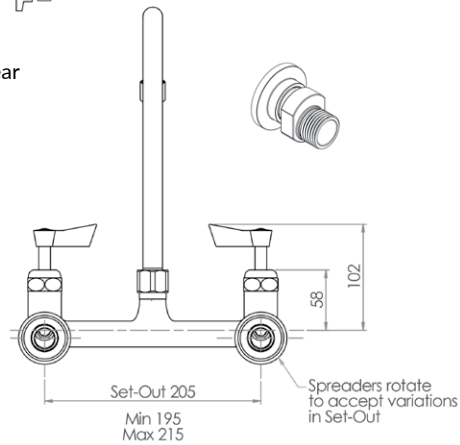


*Exclusions apply

3monkeez.com.au

## Single Wall Mount Body with Gooseneck Swivel Spout

10 YEAR WARRANTY 2 YEAR ONSITE SUPPORT


**T-3MSWG07** – *7" spout*

**T-3MSWG12** – *12" spout*


- Full S/S Construction
- Single Control Tap for Single Temperature, Cold or Pre-Mixed Water
- ½" FI BSP Inlet
- Available with a 7" or 12" Gooseneck Spout – 4 Star 7.5LPM
- Working Pressure Range 150kPa-500kPa
- Maximum Operating Temperature 80 Degrees




Top

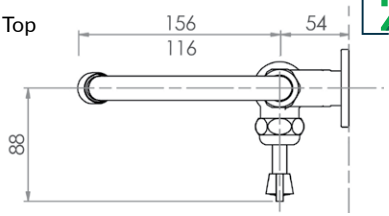


Front

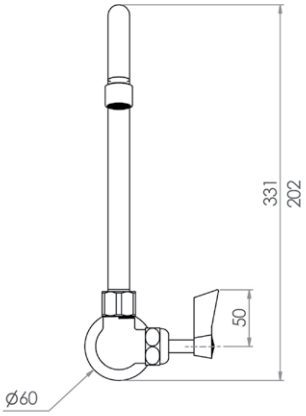


Side

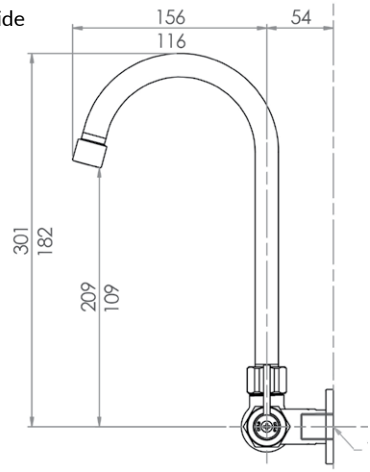


*Exclusions apply

## Wall Elbow with Gooseneck Swivel Spout

10 YEAR WARRANTY + 2 YEAR ONSITE SUPPORT


**T-3MWEG07** – *7" spout*

**T-3MWEG12** – *12" spout*


- Full S/S Construction
- ½" FI BSP Inlet
- Available with a 7" or 12" Gooseneck Spout – 4 Star 7.5LPM
- Working Pressure Range 150kPa-500kPa
- Maximum Operating Temperature 80 Degrees




Top




Front

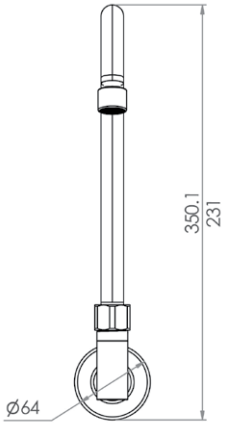


Side

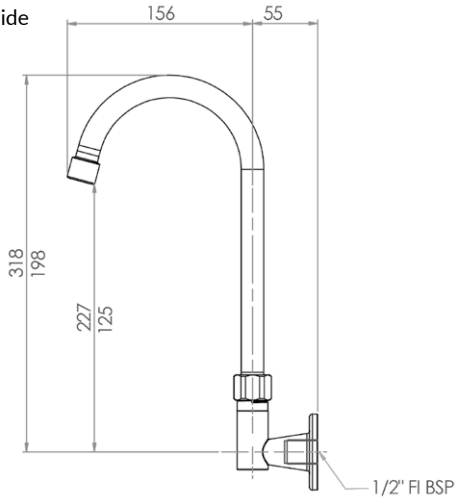


*Exclusions apply

## Single Bench Mounted Pot and Kettle Filler


10 YEAR WARRANTY INCLUDING 2 YEAR ONSITE SUPPORT

### T-3MSS-PKH

- Folding Outlet and Stop
- Single Control Tap for Single Temperature, Cold or Pre-Mixed Water
- ½" MI BSP Inlet
- Fills Pots and Kettles Fast
- Working Pressure Range 150kPa-500kPa
- Maximum Operating Temperature 80 Degrees



Side

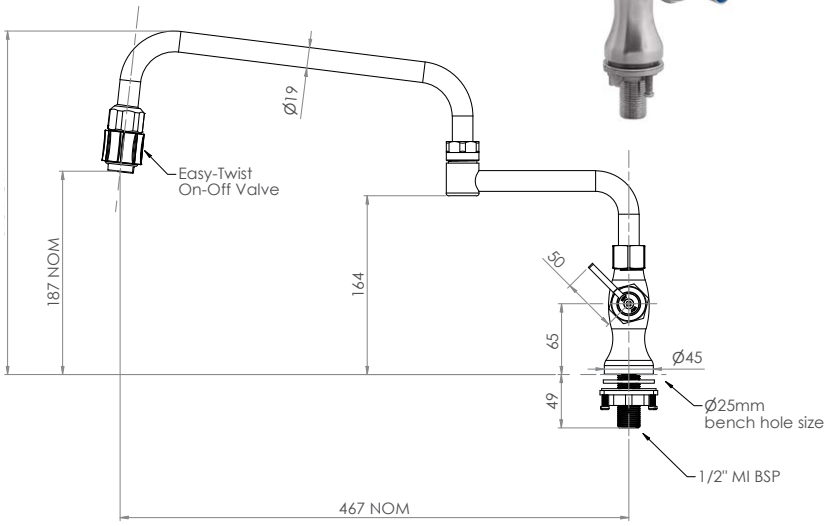




T-3MSSP-PKTWIST



T-3M1514

*Exclusions apply

3monkeez.com.au

## Single Wall Mounted Pot and Kettle Filler


10 YEAR WARRANTY 10 2 YEAR ONSITE SUPPORT

### T-3MSS-PKW


- Folding Outlet and Stop
- Single Control Tap for Single Temperature, Cold or Pre-Mixed Water
- ½" FI BSP Inlet
- Fills Pots and Kettles Fast
- Working Pressure Range 150kPa-500kPa
- Maximum Operating Temperature 80 Degrees



Side




Front

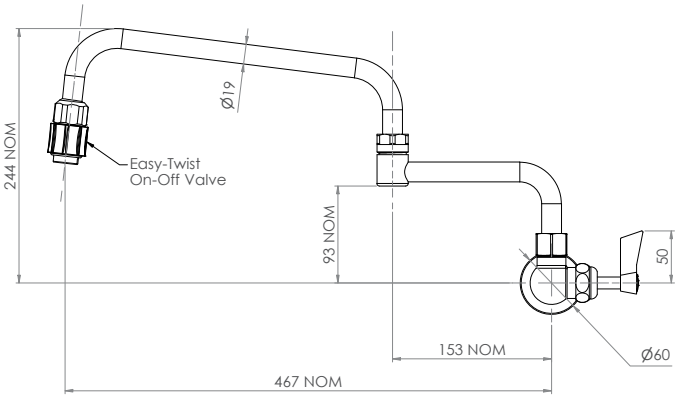




T-3MSSP-PKTWIST



T-3M1514

*Exclusions apply

3monkeez.com.au

## School Pattern Type 26 Laboratory Tap with Vandal Resistant Aerator


10 YEAR WARRANTY 10 + 2 YEAR ONSITE SUPPORT

**T-3MSS-LAB26-A**


- Fixed Spout Position
- Single ½" MI BSP Inlet
- Vandal Resistant School Pattern Handle
- Jumper Valve
- WELS 5* 6LPM
- 500kPa Maximum Working Pressure
- 304 Grade S/S
- Anti-Turn Security Lugs
- Laminar Flow Vandal Resistant Aerator
- EFSG Compliant




Front

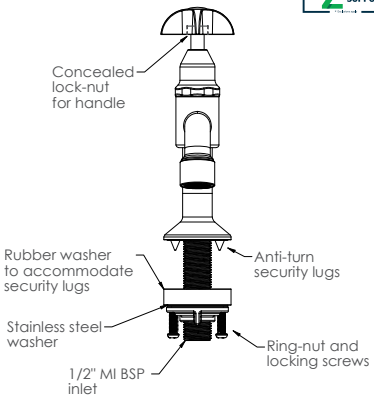


Side

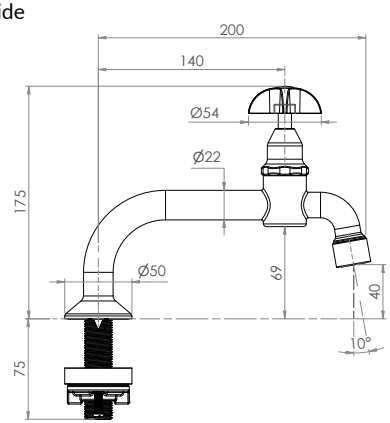


Top



*Exclusions apply

## School Pattern Type 26 Laboratory Tap with Tube Nozzle


10 YEAR WARRANTY 2 YEAR ONSITE SUPPORT

### T-3MSS-LAB26-TN


- Fixed Spout Position
- Single ½" MI BSP Inlet
- Vandal Resistant School Pattern Handle
- Jumper Valve
- WELS 5* 6LPM
- 500kPa Maximum Working Pressure
- 304 Grade S/S
- Anti-Turn Security Lugs
- EFSG Compliant




Front

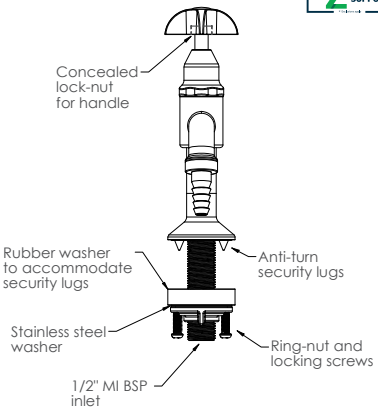


Side

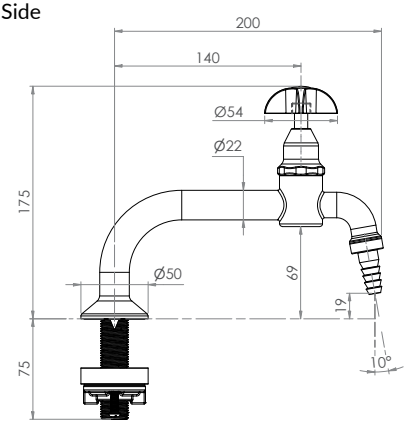


Top



*Exclusions apply

10 YEAR WARRANTY 2 YEAR ONSITE SUPPORT


## School Pattern Type 8 Laboratory Tap with Vandal Resistant Aerator on Main Spout

**T-3MSS-LABFG08-A**


- Variable Fixed Spout Position
  *(Handle Can Be Positioned Left or Right)*
- Single ½" MI BSP Inlet
- Vandal Resistant School Pattern Handle
- Jumper Valve
- WELS 5* 6LPM
- 500kPa Maximum Working Pressure
- 304 Grade S/S
- Anti-Turn Security Lugs
- Laminar Flow Vandal Resistant Aerator
- EFSG Compliant




Front

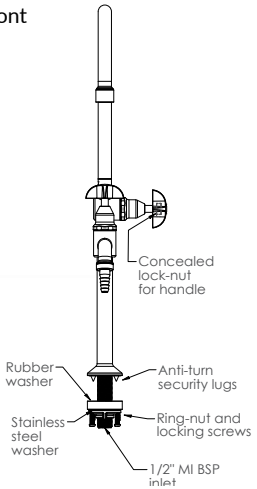


Side

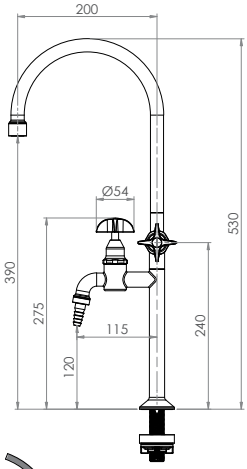


Top




*Exclusions apply

3monkeez.com.au

## School Pattern Type 8 Laboratory Tap with Tube Nozzle on Main Spout


10 YEAR WARRANTY 10 2 YEAR ONSITE SUPPORT

**T-3MSS-LABFG08-TN**


- Variable Fixed Spout Position
  *(Handle Can Be Positioned Left or Right)*
- Single ½" MI BSP Inlet
- Vandal Resistant School Pattern Handle
- Jumper Valve
- WELS 5* 6LPM
- 500kPa Maximum Working Pressure
- 304 Grade S/S
- Anti-Turn Security Lugs
- EFSG Compliant




Front

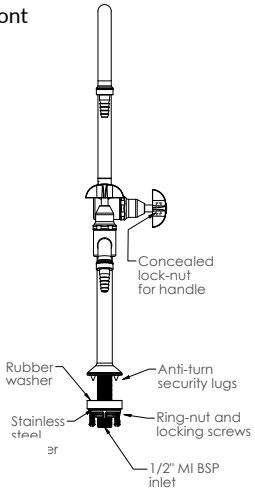


Side

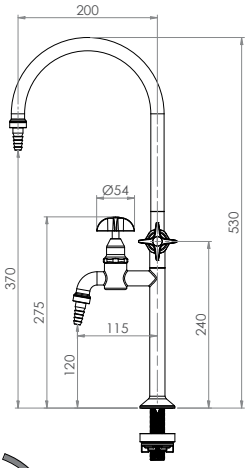


Top




*Exclusions apply

3monkeez.com.au

## School Pattern Type 16 Laboratory Tap with Vandal Resistant Aerator


10 YEAR WARRANTY 2 YEAR ONSITE SUPPORT

**T-3MSS-LABFG16-A**


- Variable Fixed Spout Position *(Handle Can Be Positioned Left or Right)*
- Single ½" MI BSP Inlet
- Vandal Resistant School Pattern Handle
- Jumper Valve
- WELS 5* 6LPM
- 500kPa Maximum Working Pressure
- 304 Grade S/S
- Anti-Turn Security Lugs
- Laminar Flow Vandal Resistant Aerator
- EFSG Compliant




Back

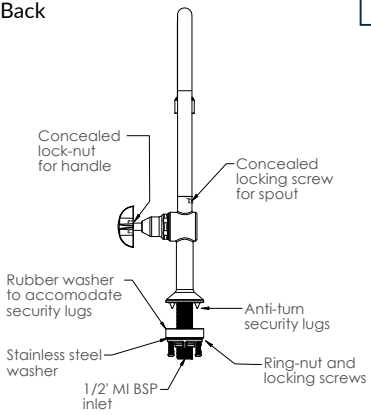


Side

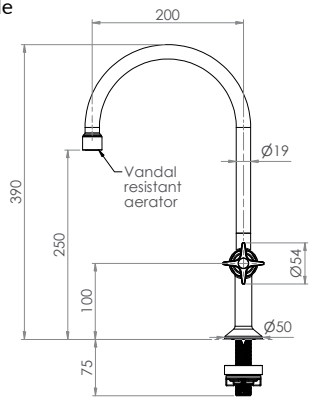


Top




*Exclusions apply

3monkeez.com.au


## School Pattern Type 16 Laboratory Tap with Tube Nozzle

10 YEAR WARRANTY 10 2 YEAR ONSITE SUPPORT

**T-3MSS-LABFG16-TN**


- Variable Fixed Spout Position *(Handle Can Be Positioned Left or Right)*
- Single ½" MI BSP Inlet
- Vandal Resistant School Pattern Handle
- Jumper Valve
- WELS 5* 6LPM
- 500kPa Maximum Working Pressure
- 304 Grade S/S
- Anti-Turn Security Lugs
- EFSG Compliant

Back

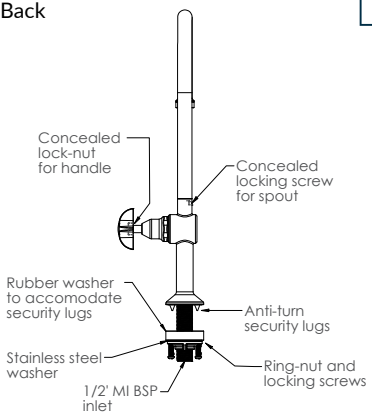





Side

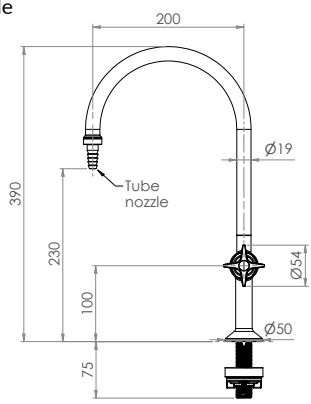


Top




*Exclusions apply

3monkeez.com.au

Lead Free AS 3718 23145

WATER RATING 6 litres per minute

100% STAINLESS STEEL LEAD FREE

GUARDIAN® TAPWARE

10 YEAR WARRANTY


2 YEAR ONSITE SUPPORT

## School Pattern Type 8 Laboratory Tap with Vandal Resistant Aerator on Main Spout

**T-3MSS-LABSG08-A**


- Swivel Spout
  *(Handle Can Be Positioned Left or Right)*
- Single ½" MI BSP Inlet
- Vandal Resistant School Pattern Handle
- Jumper Valve
- WELS 5* 6LPM
- 500kPa Maximum Working Pressure
- 304 Grade S/S
- Anti-Turn Security Lugs
- Laminar Flow Vandal Resistant Aerator
- EFSG Compliant

Front

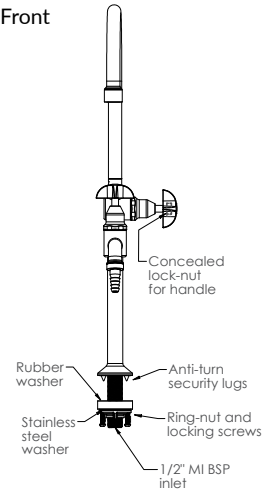





Side

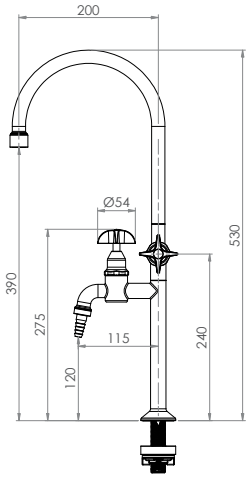


Top




*Exclusions apply

3monkeez.com.au


## School Pattern Type 8 Laboratory Tap with Tube Nozzle on Main Spout


10 YEAR WARRANTY 10 INCLUDING 2 YEAR ONSITE SUPPORT

**T-3MSS-LABSG08-TN**


- Swivel Spout
  *(Handle Can Be Positioned Left or Right)*
- Single ½" MI BSP Inlet
- Vandal Resistant School Pattern Handle
- Jumper Valve
- WELS 5* 6LPM
- 500kPa Maximum Working Pressure
- 304 Grade S/S
- Anti-Turn Security Lugs
- EFSG Compliant

Front

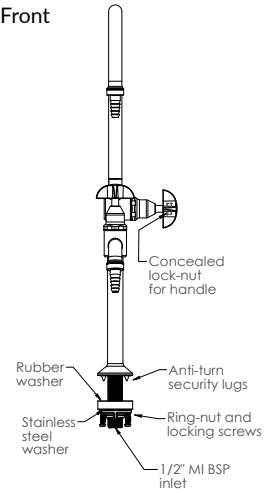


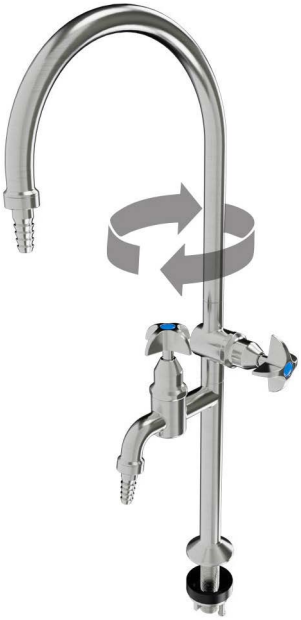Side

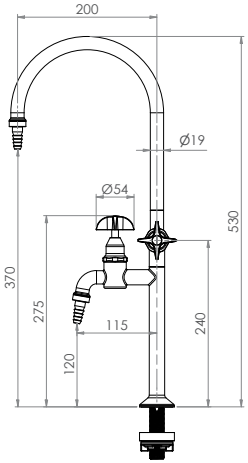


Top




*Exclusions apply

3monkeez.com.au


## School Pattern Type 16 Laboratory Tap with Vandal Resistant Aerator

10 YEAR WARRANTY 10 + 2 YEAR ONSITE SUPPORT

**T-3MSS-LABSG16-A**


- Swivel Spout
  *(Handle Can Be Positioned Left or Right)*
- Single ½" MI BSP Inlet
- Vandal Resistant School Pattern Handle
- Jumper Valve
- WELS 5* 6LPM
- 500kPa Maximum Working Pressure
- 304 Grade S/S
- Anti-Turn Security Lugs
- Laminar Flow Vandal Resistant Aerator
- EFSG Compliant

Back

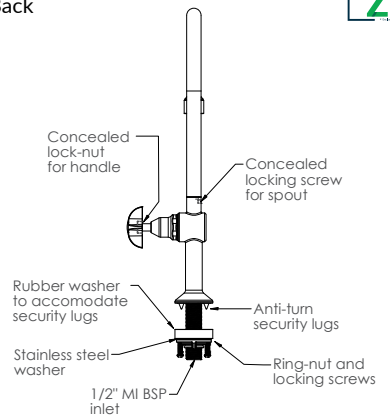





Side

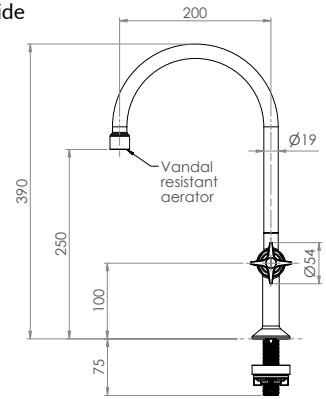


Top




*Exclusions apply

3monkeez.com.au


## School Pattern Type 16 Laboratory Tap with Tube Nozzle

10 YEAR WARRANTY 2 YEAR ONSITE SUPPORT

### T-3MSS-LABSG16-TN


- Swivel Spout
  *(Handle Can Be Positioned Left or Right)*
- Single ½" MI BSP Inlet
- Vandal Resistant School Pattern Handle
- Jumper Valve
- WELS 5* 6LPM
- 500kPa Maximum Working Pressure
- 304 Grade S/S
- Anti-Turn Security Lugs
- EFSG Compliant

Back

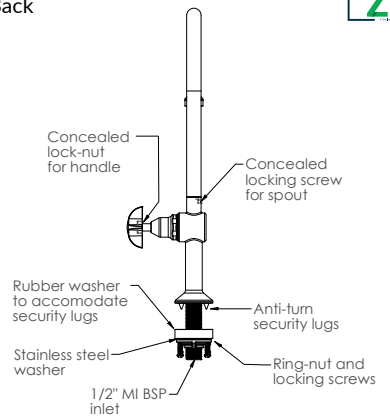





Side

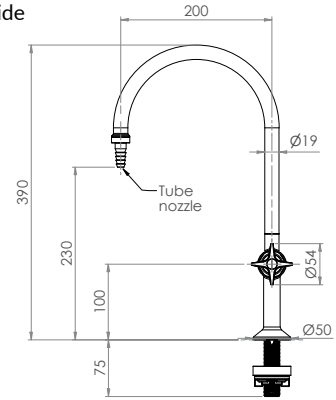


Top




*Exclusions apply


## Lever Handle Type 26 Laboratory Tap with Vandal Resistant Aerator

**T-3MSS-LABL26-A**


- Fixed Spout Position
- Single ½" MI BSP Inlet
- Vandal Resistant Lever Handle
- Jumper Valve
- WELS 5* 6LPM
- 500kPa Maximum Working Pressure
- 304 Grade S/S
- Anti-Turn Security Lugs
- Laminar Flow Vandal Resistant Aerator
- EFSG Compliant




Front

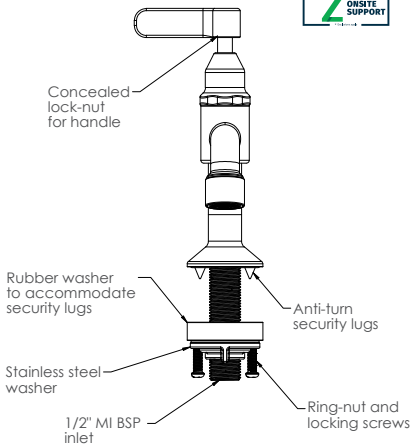


Side

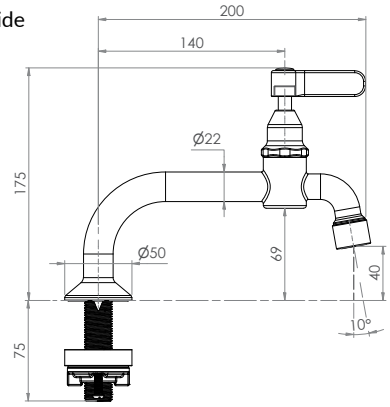


Top



*Exclusions apply

Lead Free AS 3718 23145

WATER RATING 6 litres per minute

100% STAINLESS STEEL LEAD FREE

GUARDIAN® TAPWARE

## Lever Handle Type 26 Laboratory Tap with Tube Nozzle


10 YEAR WARRANTY + 2 YEAR ONSITE SUPPORT

**T-3MSS-LABL26-TN**


- Fixed Spout Position
- Single ½" MI BSP Inlet
- Vandal Resistant Lever Handle
- Jumper Valve
- WELS 5* 6LPM
- 500kPa Maximum Working Pressure
- 304 Grade S/S
- Anti-Turn Security Lugs
- Laminar Flow Vandal Resistant Aerator
- EFSG Compliant




Front

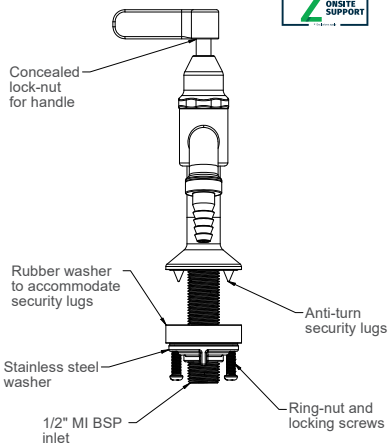


Side

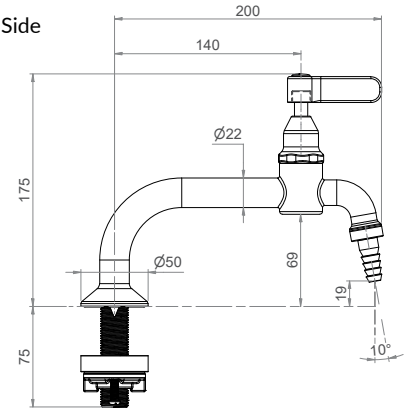


Top



*Exclusions apply

10 YEAR WARRANTY 2 YEAR ONSITE SUPPORT


## Lever Handle Type 8 Laboratory Tap with Vandal Resistant Aerator on Main Spout

**T-3MSS-LABLFG08-A**


- Variable Fixed Spout Position
  *(Handle Can Be Positioned Left or Right)*
- Single ½" MI BSP Inlet
- Vandal Resistant Lever Handle
- Jumper Valve
- WELS 5* 6LPM
- 500kPa Maximum Working Pressure
- 304 Grade S/S
- Anti-Turn Security Lugs
- Laminar Flow Vandal Resistant Aerator
- EFSG Compliant




Front

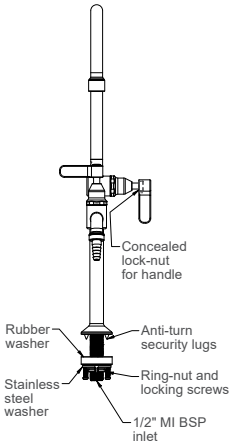


Side

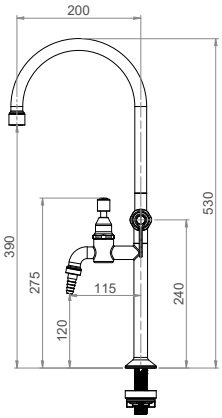


Top




Mounting hole detail

*Exclusions apply

Lead Free AS 3718 23145

WATER RATING 6 litres per minute

100% STAINLESS STEEL LEAD FREE

GUARDIAN® TAPWARE


10 YEAR WARRANTY 2 YEAR ONSITE SUPPORT

## Lever Handle Type 8 Laboratory Tap with Tube Nozzle on Main Spout

**T-3MSS-LABLFG08-TN**


- Variable Fixed Spout Position *(Handle Can Be Positioned Left or Right)*
- Single ½" MI BSP Inlet
- Vandal Resistant Lever Handle
- Jumper Valve
- WELS 5* 6LPM
- 500kPa Maximum Working Pressure
- 304 Grade S/S
- Anti-Turn Security Lugs
- EFSG Compliant

Front

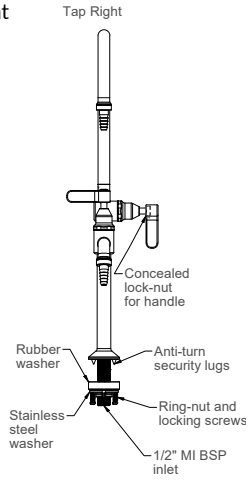





Side

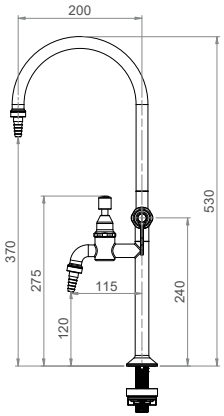


Top




Mounting hole detail

*Exclusions apply

3monkeez.com.au

## Lever Handle Type 16 Laboratory Tap with Vandal Resistant Aerator


10 YEAR WARRANTY 10 INCLUSIVE 2 YEAR ONSITE SUPPORT

**T-3MSS-LABLFG16-A**


- Variable Fixed Spout Position *(Handle Can Be Positioned Left or Right)*
- Single ½" MI BSP Inlet
- Vandal Resistant Lever Handle
- Jumper Valve
- WELS 5* 6LPM
- 500kPa Maximum Working Pressure
- 304 Grade S/S
- Anti-Turn Security Lugs
- Laminar Flow Vandal Resistant Aerator
- EFSG Compliant




Back

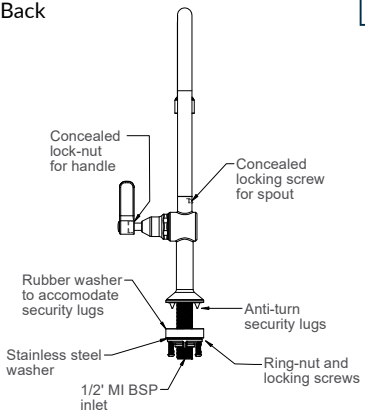


Side

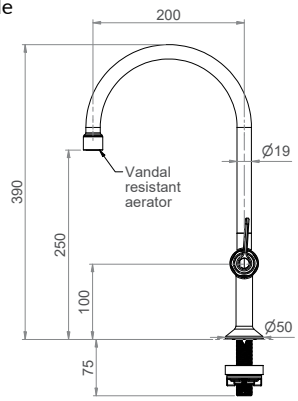


Top




*Exclusions apply


## Lever Handle Type 16 Laboratory Tap with Tube Nozzle

10 YEAR WARRANTY 10 INC. 2 YEAR ONSITE SUPPORT

**T-3MSS-LABLFG16-TN**


- Variable Fixed Spout Position *(Handle Can Be Positioned Left or Right)*
- Single ½" MI BSP Inlet
- Vandal Resistant Lever Handle
- Jumper Valve
- WELS 5* 6LPM
- 500kPa Maximum Working Pressure
- 304 Grade S/S
- Anti-Turn Security Lugs
- EFSG Compliant

Back

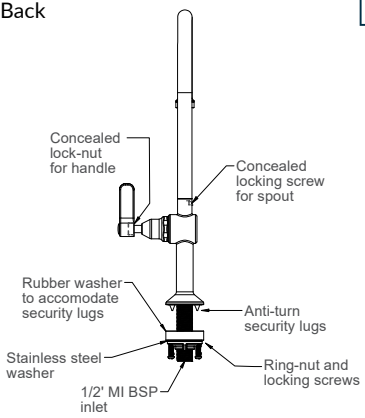





Side

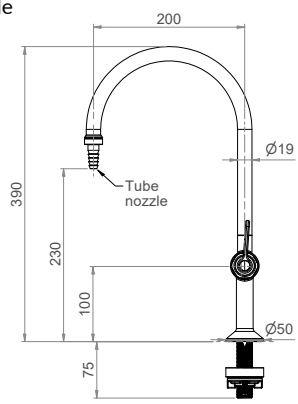


Top




*Exclusions apply

3monkeez.com.au


10 YEAR WARRANTY 2 YEAR ONSITE SUPPORT

## Lever Handle Type 8 Laboratory Tap with Vandal Resistant Aerator on Main Spout

**T-3MSS-LABLSG08-A**


- Swivel Spout
  *(Handle Can Be Positioned Left or Right)*
- Single ½" MI BSP Inlet
- Vandal Resistant Lever Handle
- Jumper Valve
- WELS 5* 6LPM
- 500kPa Maximum Working Pressure
- 304 Grade S/S
- Anti-Turn Security Lugs
- Laminar Flow Vandal Resistant Aerator
- EFSG Compliant

Front

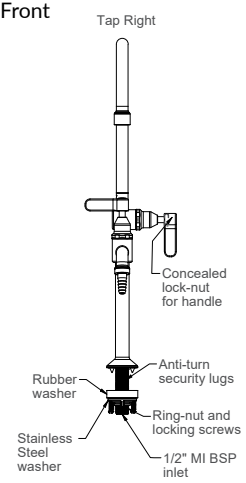





Side

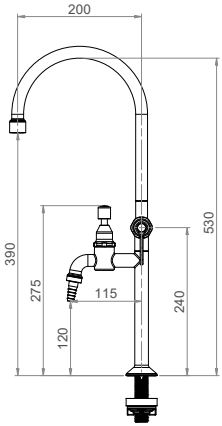


Top




Mounting hole detail

*Exclusions apply

3monkeez.com.au


10 YEAR WARRANTY 2 YEAR ONSITE SUPPORT

## Lever Handle Type 8 Laboratory Tap with Tube Nozzle on Main Spout

**T-3MSS-LABLSG08-TN**


- Swivel Spout
  *(Handle Can Be Positioned Left or Right)*
- Single ½" MI BSP Inlet
- Vandal Resistant Lever Handle
- Jumper Valve
- WELS 5* 6LPM
- 500kPa Maximum Working Pressure
- 304 Grade S/S
- Anti-Turn Security Lugs
- EFSG Compliant

Front

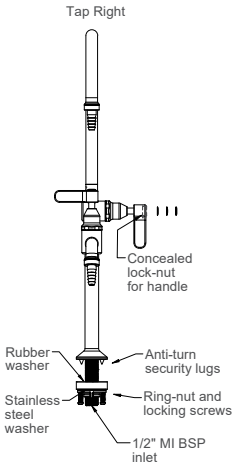





Side

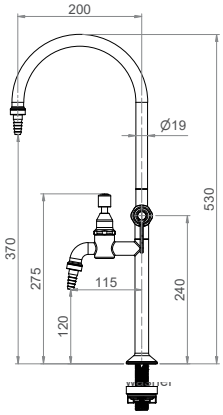


Top




Mounting hole detail

*Exclusions apply

3monkeez.com.au


## Lever Handle Type 16 Laboratory Tap with Vandal Resistant Aerator

10 YEAR WARRANTY
2 YEAR ONSITE SUPPORT

**T-3MSS-LABLSG16-A**


- Swivel Spout
  *(Handle Can Be Positioned Left or Right)*
- Single ½" MI BSP Inlet
- Vandal Resistant Lever Handle
- Jumper Valve
- WELS 5* 6LPM
- 500kPa Maximum Working Pressure
- 304 Grade S/S
- Anti-Turn Security Lugs
- Laminar Flow Vandal Resistant Aerator
- EFSG Compliant

Back

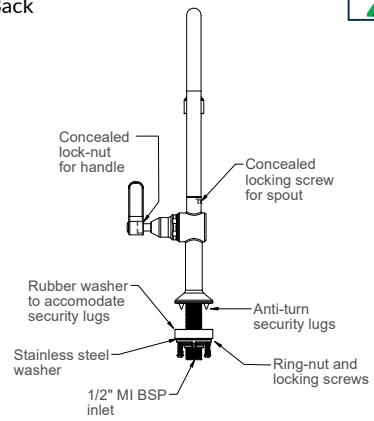





Side

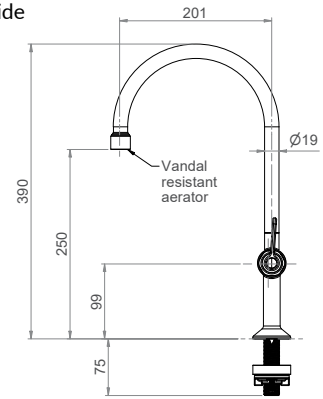


Top




*Exclusions apply


## Lever Handle Type 16 Laboratory Tap with Tube Nozzle

10 YEAR WARRANTY + 2 YEAR ONSITE SUPPORT

**T-3MSS-LABLSG16-TN**


- Swivel Spout
  *(Handle Can Be Positioned Left or Right)*
- Single ½" MI BSP Inlet
- Vandal Resistant Lever Handle
- Jumper Valve
- WELS 5* 6LPM
- 500kPa Maximum Working Pressure
- 304 Grade S/S
- Anti-Turn Security Lugs
- EFSG Compliant

Back

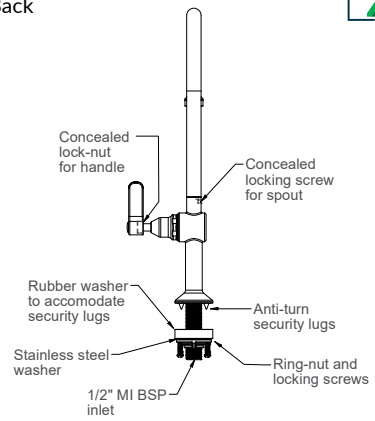





Side

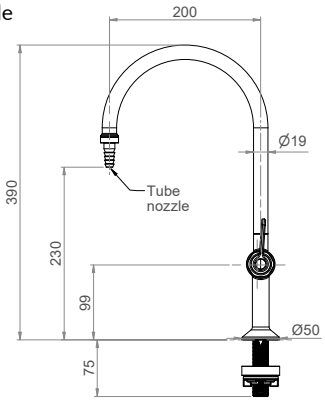


Top




*Exclusions apply


## School Pillar Tap - Lever Handle Stainless Steel


10 YEAR WARRANTY 2 YEAR ONSITE SUPPORT


### T-3MSS-LPTVR

- Fixed Spout Position
- Single ½" MI BSP Inlet
- Vandal Resistant Lever Handle
- Jumper Valve
- WELS 5* 6LPM
- 500kPa Maximum Working Pressure
- 304 Grade S/S
- EFSG Compliant Commercial Tapware



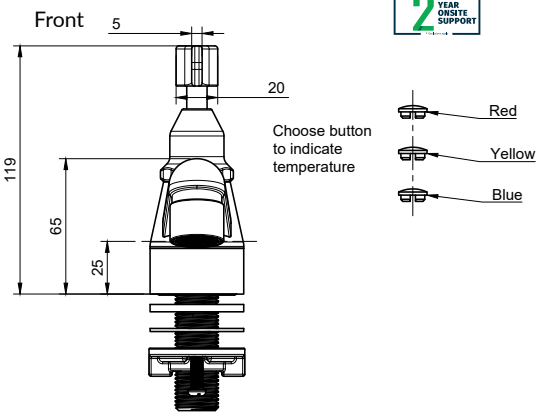

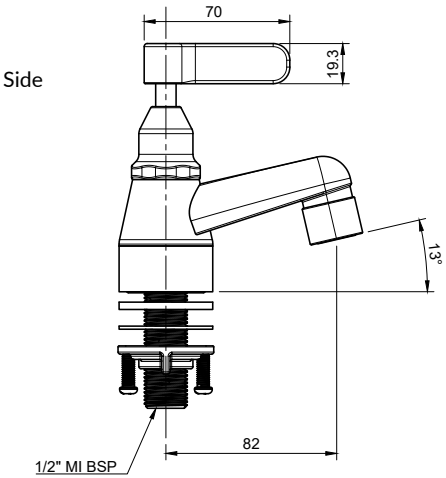
*Exclusions apply

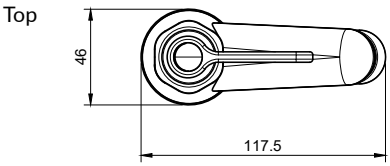
## School Pillar Tap - School Pattern Handle Stainless Steel


10 YEAR WARRANTY 2 YEAR ONSITE SUPPORT


**T-3MSS-SPPTVR**

- Fixed Spout Position
- Single ½" MI BSP Inlet
- Vandal Resistant School Pattern Handle
- Jumper Valve
- WELS 5* 6LPM
- 500kPa Maximum Working Pressure
- 304 Grade S/S
- EFSG Compliant Commercial Tapware



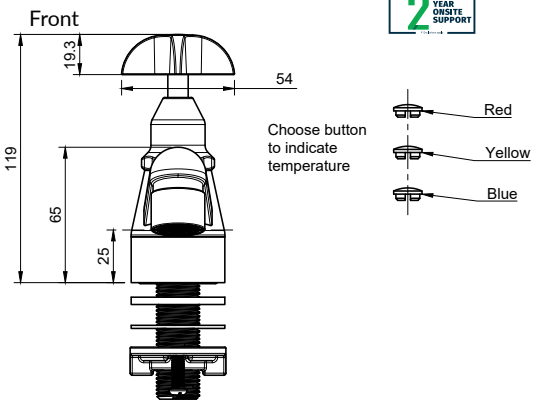

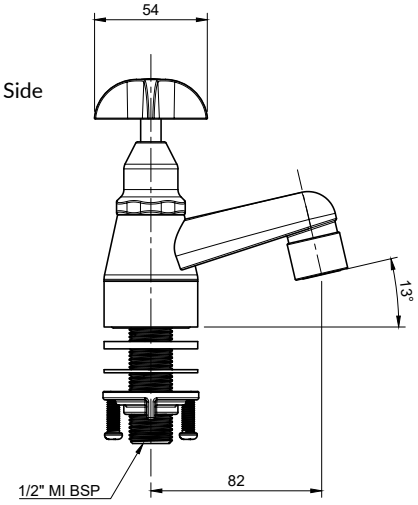
*Exclusions apply

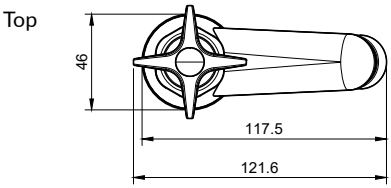3monkeez.com.au

# Commercial Tapware

## Gas Turret - Type 38 | Single Straight


5 YEAR WARRANTY

**GT-T38**


- Inlet: 1/2" BSP - Male
- Working Pressure - 7kPa, (Max)
- Gas Certified AGA 2627
- Complies with AS4617
- Non-Return Valve
- Anti-Rotation Prongs on Base
- Quality Chrome Plating
- Outlet: Push-on Fitting
  (Suit 10mm Silicon Gas Hose)




Top




Side




*Exclusions apply

# Commercial Tapware


## Gas Turret - Type 40 | 2 Way 90° Right Angled

**GT-T40A**


- Inlet: 1/2" BSP - Male
- Working Pressure - 7kPa, (Max)
- Gas Certified AGA 2627
- Complies with AS4617
- Non-Return Valve
- Anti-Rotation Prongs on Base
- Quality Chrome Plating
- Outlet: Push-on Fitting
  (Suit 10mm Silicon Gas Hose)




Top




Side




*Exclusions apply

# Commercial Tapware

## Gas Turret - Type 40 | 2 Way 90° Straight


5 YEAR WARRANTY

**GT-T40S**


- Inlet: 1/2" BSP - Male
- Working Pressure - 7kPa, (Max)
- Gas Certified AGA 2627
- Complies with AS4617
- Non-Return Valve
- Anti-Rotation Prongs on Base
- Quality Chrome Plating
- Outlet: Push-on Fitting
  (Suit 10mm Silicon Gas Hose)




Top




Side




*Exclusions apply

## Stainless Steel Sink and Basin Mixers

The sleek, sophisticated design of 3monkeez® basin and sink mixers make them ideal for your next project. The compact design of our basin mixers make them perfectly suited to bathroom basins, while our sink mixers are ideally suited to kitchen and laundry applications.

This versatile range also comes with the option of lever handles, to provide greater ease of operation and offer a solution for disability applications.



## Stainless Steel Swivel Basin Mixer


10 YEAR WARRANTY
2 YEAR ONSITE SUPPORT

**T-3MB4MIX**

**T-3MB6MIX**


- Full S/S Construction
- Available in WELS 4 Star 7.5LPM or WELS 6 Star 4.5LPM
- Includes Flexi Hoses ½" FI BSP
- Working Pressure Range 150kPa-500kPa
- Maximum Operating Temperature 80 Degrees

Side

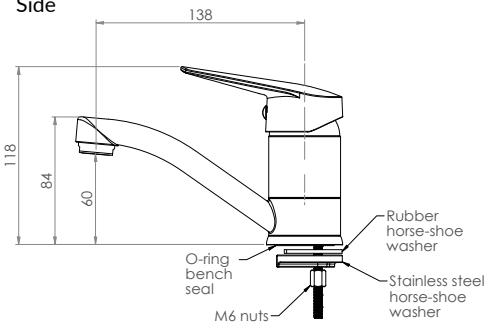






Top




Front



**T-3MSSP-MIXCART**

*Exclusions apply

## Stainless Steel Swivel Sink Mixer


10 YEAR WARRANTY
2 YEAR ONSITE SUPPORT

**T-3MS4MIX**

**T-3MS6MIX**


- Full S/S Construction
- Available in WELS 4 Star 7.5LPM or WELS 6 Star 4.5LPM
- Includes Flexi Hoses – ½" FI BSP
- Working Pressure Range 150kPa-500kPa
- Maximum Operating Temperature 80 Degrees

Side

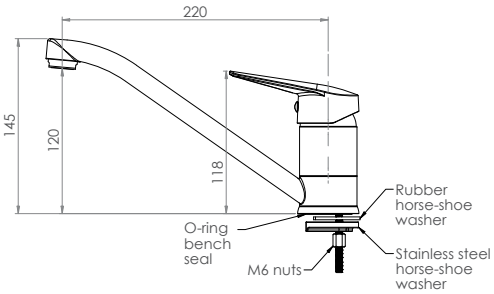






Top




Front



**T-3MSSP-MIXCART**

*Exclusions apply

## Stainless Steel Lever Handle Basin Mixer

AS1428 Compliant


10 YEAR WARRANTY 10 2 YEAR ONSITE SUPPORT

**T-3MLB4MIX**

**T-3MLB6MIX**


- Full S/S Construction
- Lever Handle for Hands Free Operation
- Available in WELS 4 Star 7.5LPM or WELS 6 Star 4.5LPM
- Includes Flexi Hoses – ½" FI BSP
- Working Pressure Range 150kPa-500kPa
- Maximum Operating Temperature 80 Degrees
- Lever Handle to Comply with AS1428.1

Side

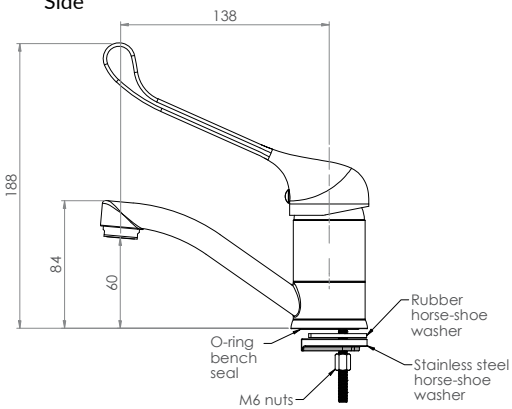






Top




Front

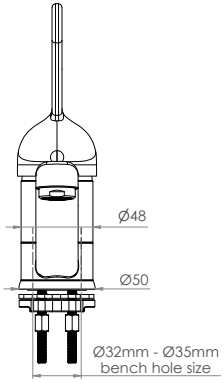

**T-3MSSP-MIXCART**

*Exclusions apply

## Stainless Steel Lever Handle Swivel Sink Mixer

AS1428 Compliant


10 YEAR WARRANTY
2 YEAR ONSITE SUPPORT

**T-3MLS4MIX**

**T-3MLS6MIX**


- Full S/S Construction
- Lever Handle for Hands Free Operation
- Available in WELS 4 Star 7.5LPM or WELS 6 Star 4.5LPM
- Includes Flexi Hoses – ½" FI BSP
- Working Pressure Range 150kPa-500kPa
- Maximum Operating Temperature 80 Degrees
- Lever Handle to Comply with AS1428.1

Side

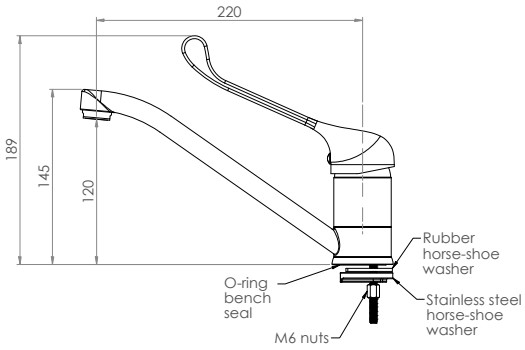






Top




Front



**T-3MSSP-MIXCART**

*Exclusions apply

## Stainless Steel Swivel Gooseneck Sink Mixer


10 YEAR WARRANTY 10 2 YEAR ONSITE SUPPORT

**T-3MSS-GS5MIX**


- Full S/S Construction
- Includes Flexi Hoses – ½" FI BSP
- WELS 5 Star 5.5LPM
- Ajustable to Suit Fixed or Swivel Spout
- Working Pressure Range 150kPa-500kPa
- Maximum Operating Temperature 80 Degrees




Side

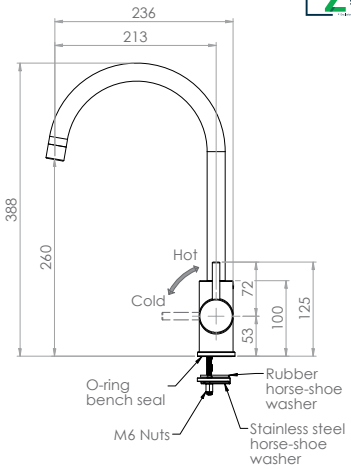


Top




Front

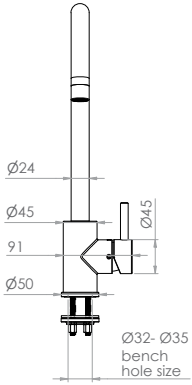


*Exclusions apply

## Stainless Steel In Wall Mixer


10 YEAR WARRANTY* 2 YEAR ONSITE SUPPORT

**T-3MSSIWM**


- Full S/S Construction
- ½" FI BSP Outlet & ½" FI BSP Inlets
- Working Pressure Range 150kPa-500kPa
- Maximum Operating Temperature 80 Degrees



Front




Side







**T-3MSSP-IWMIXCART**

**T-3MSSP-IWH** *(Replacement Handle)*

Top




*Exclusions apply

## Stainless Steel Lever Handle In Wall Mixer

AS1428 Compliant

10 YEAR WARRANTY 10 2 YEAR ONSITE SUPPORT

### T-3MSSLIWM


- Full S/S Construction
- ½" FI BSP Outlet & ½" FI BSP Inlets
- Working Pressure Range 150kPa-500kPa
- Maximum Operating Temperature 80 Degrees
- Lever Handle to Comply with AS1428.1






T-3MSSP-IWMIXCART


Front




Side




Top




*Exclusions apply

# Commercial Tapware

AS NZS3662 26901

WATER RATING 6.5 litres per minute

100% STAINLESS STEEL LEAD FREE

GUARDIAN® TAPWARE

10 YEAR WARRANTY 2 YEAR ONSITE SUPPORT


## Wall Mounted Shower Rose

### T-3MSS-WMSR


- Indoor or Outdoor Use
- 304 Grade Stainless Steel
- Working Pressure Range 150kPa – 500kPa
- Maximum Operating Temperature 5 - 80 Degrees
- Anti Vandal
- Anti Ligature
- WELS 4Star 6.5LPM




Top





Side




Front




Back





### P-3MSS-TVTF

Time Flow Activation Button


- 1/2" MI BSP Connections
- 304 Grade S/S




Top




Front




Side




Bottom




*Exclusions apply

3monkeez.com.au

# Commercial Tapware

Lead Free
AS 3718
23145

100% STAINLESS STEEL LEAD FREE

GUARDIAN® TAPWARE

## Zero Touch Range

10 YEAR WARRANTY
INCLUDING
2 YEAR ONSITE SUPPORT

3monkeez® new Sensor Range adds a hygienic finishing touch to every project. Leave behind germs, bacteria and viruses with tapware that use hands-free technology and infrared sensors to provide a reliable, contact-free solution. With sensor-operated Compact Bubblers, Bottle Fillers, and Bib and Pillar Taps, and flexible wall or bench mounted installation options, there is bound to be a hygienic hands-free option to suit your next project.

Constructed from 100% stainless steel these products also carry the Guardian Tapware® by 3monkeez® guarantee, offering not only attractive designs, but the strength, reliability and impressive water quality protection that can only be assured by stainless steel construction.








*Exclusions apply


3monkeez.com.au

## Bench Mount Infrared Sensor Tap

10 YEAR WARRANTY
2 YEAR ONSITE SUPPORT


**T-3MSS-HMSTB**
**T-3MSS-HMSTB-TV**
**T-3MSS-HMSTM**
**T-3MSS-HMSTM-TV**



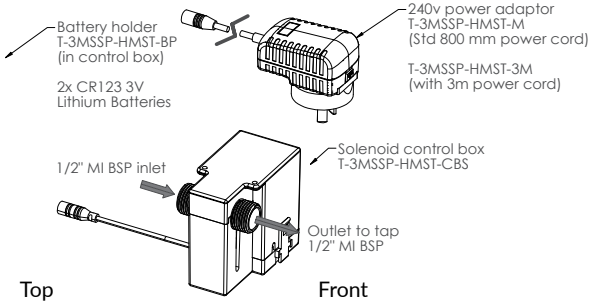


*Available in mains or battery powered, with optional tempering valve*

- Battery Powered – 2x CR123 3V Lithium Batteries Estimates 80,000 Cycles
- Mains Powered – 6V Transformer
- Full S/S Construction
- Sensor Range Nominal: 50mm – 200mm
- Maximum Run Time: 60 Seconds
- WELS 6 Star 4LPM
- Working Pressure Range 150kPa-500kPa
- Maximum Operating Temperature 50 Degrees

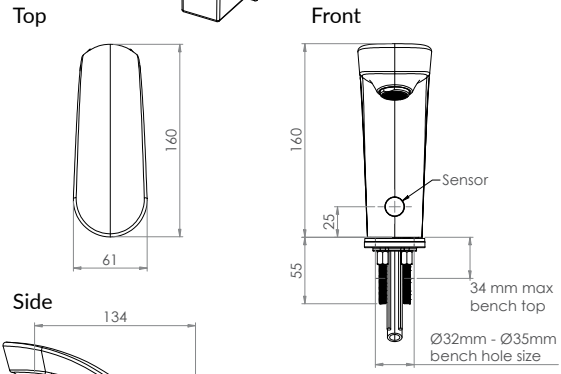




**T-3MSSP-HMST-M**



**T-3MSSP-HMST-CBS**



**T-3MSSP-HMST-BP**



**T-3MSSP-HMST-3M**

* Power Supply with 3 metre lead available separately

*Exclusions apply


## Gooseneck Bench Mounted Sensor Tap


10 YEAR WARRANTY 2 YEAR ONSITE SUPPORT

**T-3MSS-GHMST21B**
**T-3MSS-GHMST21M**
**T-3MSS-GHMST21B-TV**
**T-3MSS-GHMST21M-TV**


*Available in mains or battery powered, with optional tempering valve*

- Battery Powered – 2x CR123 3V Lithium Batteries Estimates 80,000 Cycles
- Mains Powered – 6V Transformer
- Full S/S Construction
- Sensor Range Nominal: 50mm – 200mm
- Maximum Run Time: 60 Seconds
- WELS 6 Star 3.5LPM
- Working Pressure Range 150kPa-500kPa
- Maximum Operating Temperature 50 Degrees





240v Power supply




Solenoid mounting bracket (included)




Solenoid Unit

Side

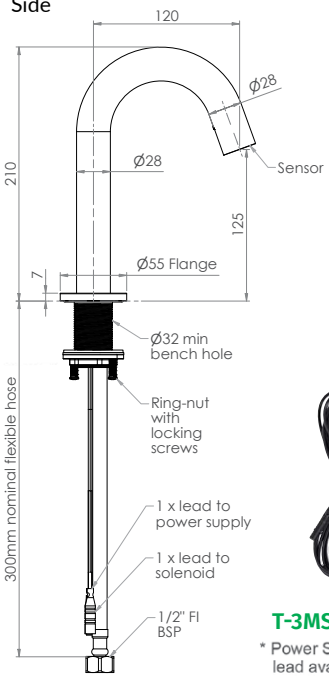




**T-3MSSP-HMST-M**



**T-3MSSP-HMST-CBS**



**T-3MSSP-HMST-BP**





**T-3MSSP-HMST-3M**

* Power Supply with 3 metre lead available separately

*Exclusions apply

## Wall Mounted Infrared Sensor Tap

10 YEAR WARRANTY
2 YEAR ONSITE SUPPORT

### T-3MSS-WMSTB


- Battery Operated Estimates 80,000 Cycles
- Infrared Sensor
- ½″ FI BSP
- Full S/S Construction
- WELS 6 Star 3.5LPM
- Working Pressure Range 150kPa-500kPa
- Maximum Operating Temperature 50 Degrees
- All in One, No External Parts




Front



Side

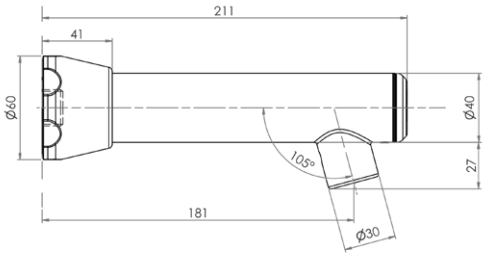


Bottom

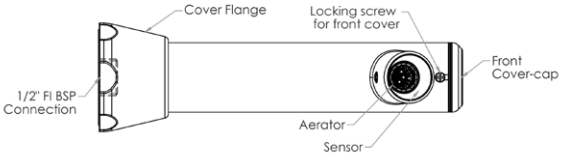




T-3MSSP-WMST-BP

*Exclusions apply

## Pillar Tap with Bench Mount Sensor


10 YEAR WARRANTY 10 2 YEAR ONSITE SUPPORT

**T-3MSS-PTSB** *(battery operated)*


**T-3MSS-PTSM** *(mains operated)*

- Infrared 6 Sec Timed Sensor
- Full S/S Construction
- Equipped with 3monkeez Sensor Technology for Hands-Free Operation
- Sensor is Bench Mounted
- Available as Battery Powered or Mains Operated
- ½" MI BSP Inlet
- WELS 6 Star 3LPM
- Working Pressure Range 150kPa-500kPa
- Maximum Operating Temperature 60 Degrees
- Battery Powered – 2x CR123 3V Lithium Batteries Estimates 80,000 Cycles


Side





Top




Front














*Exclusions apply

3monkeez.com.au

# Commercial Tapware

Lead Free AS 3718 23145

WATER RATING 3.0 litres per minute

100% STAINLESS STEEL LEAD FREE

GUARDIAN® TAPWARE

10 YEAR WARRANTY 2 YEAR ONSITE SUPPORT


## Pillar Tap with Wall Mount Sensor

**T-3MSS-PTSWB** *(battery operated)*


**T-3MSS-PTSWM** *(mains operated)*

- Infrared 6 Sec Timed Sensor
- Full S/S Construction
- Equipped with 3monkeez Sensor Technology for Hands-Free Operation
- Sensor is Wall Mounted
- Available as Battery Powered or Mains Operated
- ½" MI BSP Inlet
- WELS 6 Star 3LPM
- Working Pressure Range 150kPa-500kPa
- Maximum Operating Temperature 60 Degrees
- Battery Powered – 2x CR123 3V Lithium Batteries Estimates 80,000 Cycles


Side





Top




Front




Mounting Body








*Exclusions apply

3monkeez.com.au

# Commercial Tapware

Lead Free AS 3718 23145

WATER RATING 3.0 litres per minute

100% STAINLESS STEEL LEAD FREE

GUARDIAN® TAPWARE

## Lever Handle Pillar Tap


AS1428 Compliant

10 YEAR WARRANTY 2 YEAR ONSITE SUPPORT


**T-3MSS-PTML** – *Mechanical Operation-On/Off*
**T-3MSS-PT6L** – *6 Second Timed Flow*
**T-3MSS-PT18L** – *18 Second Timed Flow*
**T-3MSS-PTAL** – *Adjustable Timed Flow*

- Full S/S Construction
- ½" MI BSP
- WELS 6 Star 3LPM
- Working Pressure Range 150kPa-500kPa
- Maximum Operating Temperature 60 Degrees
- Lever Handle to Comply with AS1428.1


Top




Side

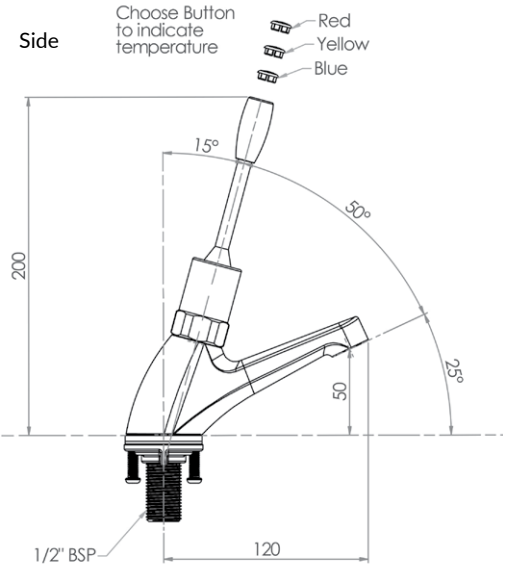

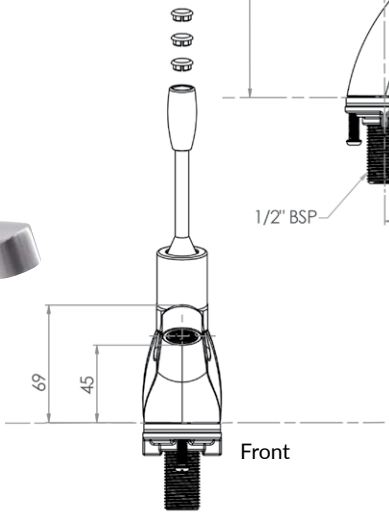


Front

*Exclusions apply

3monkeez.com.au

# Commercial Tapware

Lead Free AS 3718 23145

WATER RATING 3.0 litres per minute

100% STAINLESS STEEL LEAD FREE

GUARDIAN® TAPWARE

10 YEAR WARRANTY 2 YEAR ONSITE SUPPORT


## Push Button Pillar Tap

**T-3MSS-PTMPB** – *Mechanical Operation-On/Off*
**T-3MSS-PT6PB** – *6 Second Timed Flow*
**T-3MSS-PT18PB** – *18 Second Timed Flow*
**T-3MSS-PTAPB** – *Adjustable Timed Flow*


- Full S/S Construction
- ½" MI BSP
- WELS 6 Star 3LPM
- Working Pressure Range 150kPa-500kPa
- Maximum Operating Temperature 60 Degrees




Top

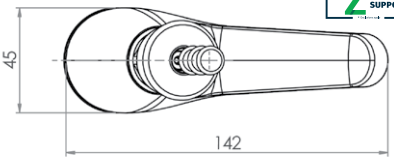


Side

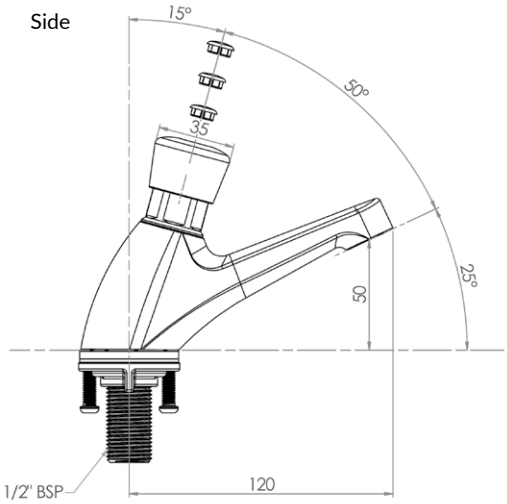


Front

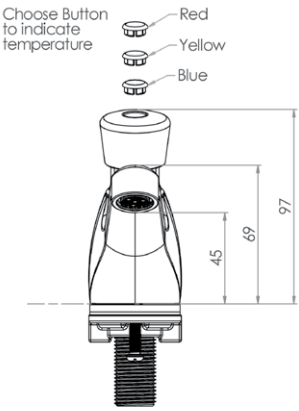


*Exclusions apply

3monkeez.com.au

## Bib Tap with Bench Mount Sensor


10 YEAR WARRANTY 10 2 YEAR ONSITE SUPPORT


**T-3MSS-BTSB** *(battery operated)*

**T-3MSS-BTSM** *(mains operated)*


- Infrared 6 Sec Timed Sensor
- Full S/S Construction
- Equipped with 3monkeez Sensor Technology for Hands-Free Operation
- Sensor is Bench Mounted
- Available as Battery Powered or Mains Operated
- ½″ MI BSP
- ½″ FI BSP Extension Piece Included
- WELS 6 Star 3LPM
- Working Pressure Range 150kPa-500kPa
- Maximum Operating Temperature 60 Degrees
- Battery Powered – 2x CR123 3V Lithium Batteries Estimates 80,000 Cycles

Side

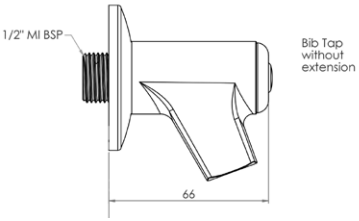

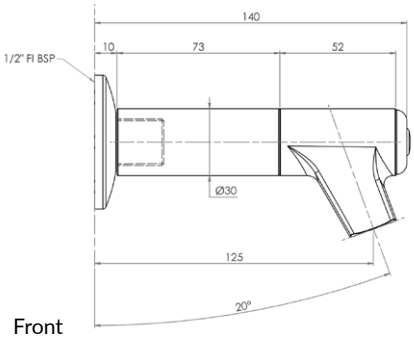
Front



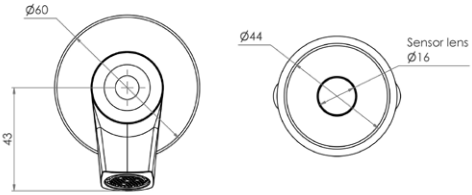






*Exclusions apply

3monkeez.com.au

## Bib Tap with Wall Mount Sensor


10 YEAR WARRANTY 10 INCLUDING 2 YEAR ONSITE SUPPORT


**T-3MSS-BTSWB** *(battery operated)*

**T-3MSS-BTSWM** *(mains operated)*


- Infrared 6 Sec Timed Sensor
- Full S/S Construction
- Equipped with 3monkeez Sensor Technology for Hands-Free Operation
- Sensor is Wall Mounted
- Available as Battery Powered or Mains Operated
- ½″ MI BSP
- ½″ FI BSP Extension Piece Included
- WELS 6 Star 3LPM
- Working Pressure Range 150kPa-500kPa
- Maximum Operating Temperature 60 Degrees
- Battery Powered – 2x CR123 3V Lithium Batteries Estimates 80,000 Cycles

Side



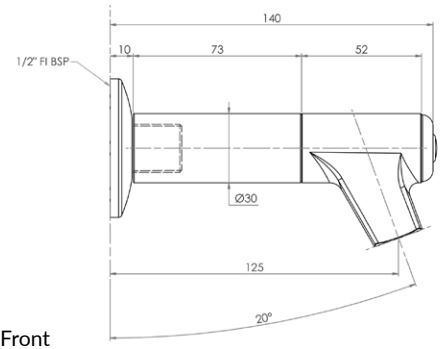
Front



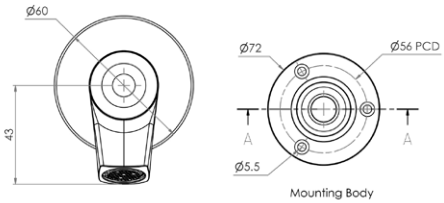









*Exclusions apply

3monkeez.com.au

## Lever Handle Bib Tap

AS1428 Compliant


10 YEAR WARRANTY 10 2 YEAR ONSITE SUPPORT

**T-3MSS-BTML** – *Mechanical Operation-On/Off*
**T-3MSS-BT6L** – *6 Second Timed Flow*
**T-3MSS-BT18L** – *18 Second Timed Flow*
**T-3MSS-BTAL** – *Adjustable Timed Flow*


- Full S/S Construction
- ½" MI BSP
- ½" FI BSP Extension Piece Included
- WELS 6 Star 3LPM
- Working Pressure Range 150kPa-500kPa
- Maximum Operating Temperature 60 Degrees
- Lever Handle to Comply with AS1428.1




Side

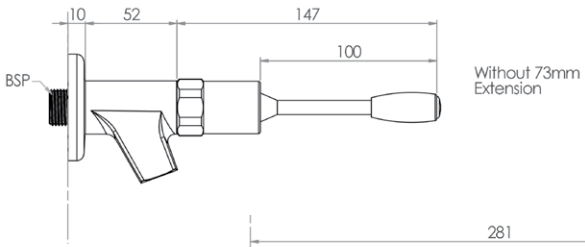


Front



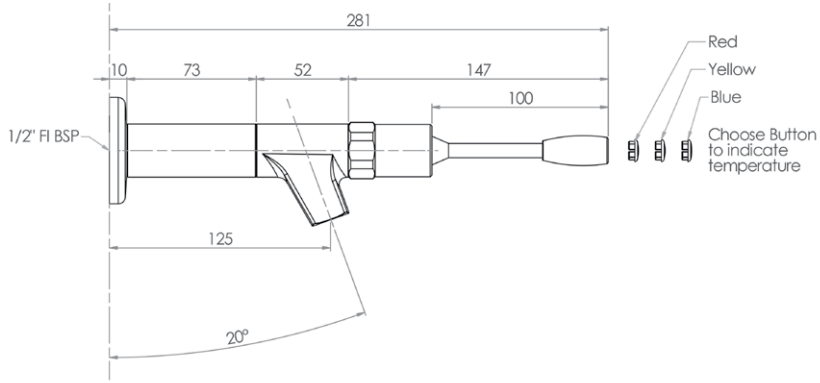
*Exclusions apply

# Commercial Tapware

Lead Free AS 3718 23145

WATER RATING 3.0 litres per minute

100% STAINLESS STEEL LEAD FREE

GUARDIAN® TAPWARE

## Push Button Bib Tap


**T-3MSS-BTMPB** – *Mechanical Operation-On/Off*
**T-3MSS-BT6PB** – *6 Second Timed Flow*
**T-3MSS-BT18PB** – *18 Second Timed Flow*
**T-3MSS-BTAPB** – *Adjustable Timed Flow*

10 YEAR WARRANTY* 2 YEAR ONSITE SUPPORT


- Full S/S Construction
- ½" MI BSP
- ½" FI BSP Extension Piece Included
- WELS 6 Star 3LPM
- Working Pressure Range 150kPa-500kPa
- Maximum Operating Temperature 60 Degrees



Front




Side

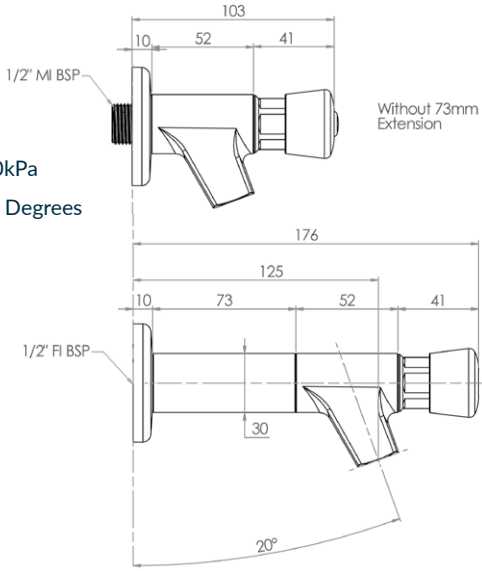


## Adjustable Bib and Pillar Taps

**3monkeez are first to offer a fully adjustable time flow cartridge as an option for Bib and Pillar Taps.**

This unique feature allows the shut off time of the tap to be easily adjusted between 0 seconds (on/off) to 18 seconds plus; giving you the flexibility to vary the flow time to suit any application or requirement. Results may vary to due different pressures.

*Exclusions apply

3monkeez.com.au

## 45 Degree Metal Mouthguard Bubbler with Bench Mount Sensor


10 YEAR WARRANTY 2 YEAR ONSITE SUPPORT

**T-3MSS-BUB45SB** *(battery operated)*


**T-3MSS-BUB45SM** *(mains operated)*

- Infrared 6 Sec Timed Sensor
- Full S/S Construction
- Equipped with 3monkeez Sensor Technology for Hands-Free Operation
- Sensor is Bench Mounted
- Available as Battery Powered or Mains Operated
- ½" FI BSP Inlet
- Ideally Suited for Use with 3monkeez PT-7 Troughs
- WELS 6 Star 2LPM
- Working Pressure Range 150kPa-500kPa
- Maximum Operating Temperature 40 Degrees
- Battery Powered – 2x CR123 3V Lithium Batteries Estimates 80,000 Cycles


Top





Front




Side

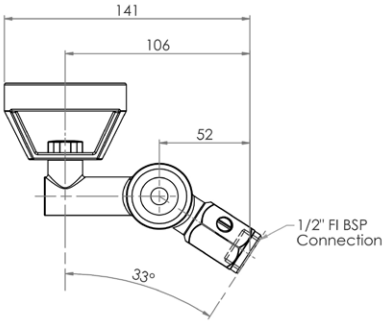






*Exclusions apply

3monkeez.com.au

## 45 Degree Metal Mouthguard Bubbler with Wall Mount Sensor


10 YEAR WARRANTY 10 2 YEAR ONSITE SUPPORT

**T-3MSS-BUB45SWB** *(battery operated)*


**T-3MSS-BUB45SWM** *(mains operated)*

- Infrared 6 Sec Timed Sensor
- Full S/S Construction
- Equipped with 3monkeez Sensor Technology for Hands-Free Operation
- Sensor is Wall Mounted
- Available as Battery Powered or Mains Operated
- ½" FI BSP Inlet
- WELS 6 Star 2LPM
- Working Pressure Range 150kPa-500kPa
- Maximum Operating Temperature 40 Degrees
- Battery Powered – 2x CR123 3V Lithium Batteries Estimates 80,000 Cycles


Top





Front




Side

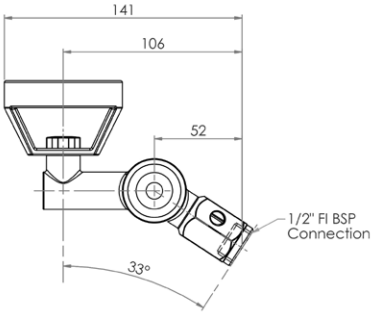


Mounting Body







*Exclusions apply

3monkeez.com.au

## 45 Degree Cam Action Bubbler With Metal Mouthguard


10 YEAR WARRANTY 10 2 YEAR ONSITE SUPPORT

### T-3MSS-BUB45C

- Full S/S Construction
- Self-Closing Valves for Water Efficiency
- Ideally Suited for Our PT-7 Troughs
- Working Pressure Range 150kPa-500kPa
- Maximum Operating Temperature 40 Degrees
- WELS 6 Star 1.5LPM





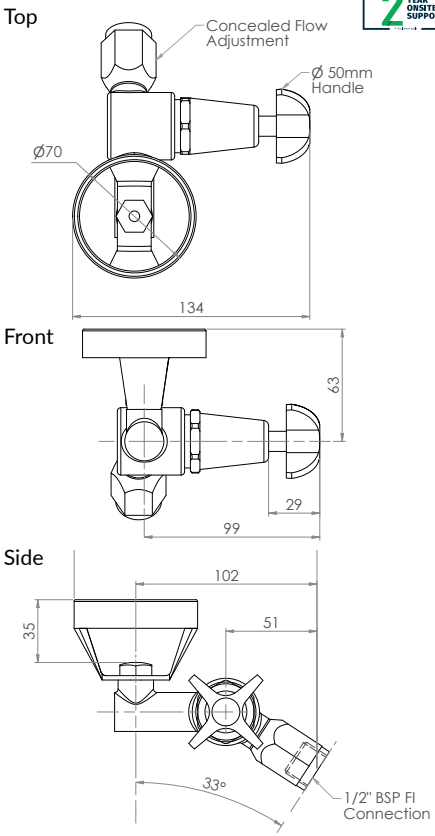




### T-3MSSP-ANGLECONVERT

- 45 Degree Bubbler Conversion Adaptor
- Converts to Suit a 90 Degree Angle
- 304 Grade S/S

*Exclusions apply

3monkeez.com.au


## 45 Degree Lever Handle Bubbler With Metal Mouthguard

10 YEAR WARRANTY 10 + 2 YEAR ONSITE SUPPORT


### T-3MSS-BUB45L

- Full S/S Construction
- Self-Closing Valves for Water Efficiency
- Ideally Suited for Our PT-7 Troughs
- Working Pressure Range 150kPa-500kPa
- Maximum Operating Temperature 40 Degrees
- WELS 6 Star 1.5LPM


Top




Front




Side










### T-3MSSP-ANGLECONVERT

- 45 Degree Bubbler Conversion Adaptor
- Converts to Suit a 90 Degree Angle
- 304 Grade S/S

*Exclusions apply


## 45 Degree Push Button Bubbler With Metal Mouthguard

10 YEAR WARRANTY 10 INCLUSIVE 2 YEAR ONSITE SUPPORT


### T-3MSS-BUB45P

- Full S/S Construction
- Self-Closing Valves for Water Efficiency
- Ideally Suited for Our PT-7 Troughs
- Working Pressure Range 150kPa-500kPa
- Maximum Operating Temperature 40 Degrees
- WELS 6 Star 1.5LPM

Top





Front






Side

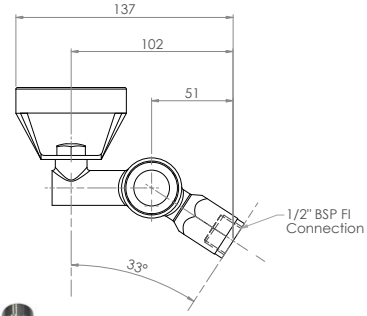






### T-3MSSP-ANGLECONVERT

- 45 Degree Bubbler Conversion Adaptor
- Converts to Suit a 90 Degree Angle
- 304 Grade S/S

*Exclusions apply

## 45 Degree Silicone Mouthguard Bubbler with Bench Mount Sensor


10 YEAR WARRANTY 10 YEAR INTERNAL 2 YEAR ONSITE SUPPORT

**T-3MSS-BUBS45SB** *(battery operated)*


**T-3MSS-BUBS45SM** *(mains operated)*

- Infrared 6 Sec Timed Sensor
- Full S/S Construction
- Equipped with 3monkeez Sensor Technology for Hands-Free Operation
- Sensor is Bench Mounted
- Available as Battery Powered or Mains Operated
- ½" FI BSP Inlet
- Ideally Suited for Use with 3monkeez PT-7 Troughs
- Unique Rubber Mouthguard that Protects Teeth
- WELS 6 Star 2LPM
- Working Pressure Range 150kPa-500kPa
- Maximum Operating Temperature 40 Degrees
- Battery Powered – 2x CR123 3V Lithium Batteries Estimates 80,000 Cycles


Top





Front




Side








*Exclusions apply

3monkeez.com.au

## 45 Degree Silicone Mouthguard Bubbler with Wall Mount Sensor


10 YEAR WARRANTY 2 YEAR ONSITE SUPPORT

**T-3MSS-BUBS45SWB** *(battery operated)*


**T-3MSS-BUBS45SWM** *(mains operated)*

- Infrared 6 Sec Timed Sensor
- Full S/S Construction
- Equipped with 3monkeez Sensor Technology for Hands-Free Operation
- Sensor is Wall Mounted
- Available as Battery Powered or Mains Operated
- ½" FI BSP Inlet
- Ideally Suited for Use with 3monkeez PT-7 Troughs
- Unique Rubber Mouthguard that Protects Teeth
- WELS 6 Star 2LPM
- Working Pressure Range 150kPa-500kPa
- Maximum Operating Temperature 40 Degrees
- Battery Powered – 2x CR123 3V Lithium Batteries Estimates 80,000 Cycles


Top





Front




Side




Mounting Body






*Exclusions apply

3monkeez.com.au

## 45 Degree Cam Action Bubbler With Silicone Mouthguard


10 YEAR WARRANTY 10 2 YEAR ONSITE SUPPORT

**T-3MSS-BUBS45C**


- Full S/S Construction
- Self-Closing Valves for Water Efficiency
- Ideally Suited for Our PT-7 Troughs
- Unique Silicone Mouthguard that Protects Teeth
- Working Pressure Range 150kPa-500kPa
- Maximum Operating Temperature 40 Degrees
- WELS 6 Star 1.5LPM




Top




Front




Side

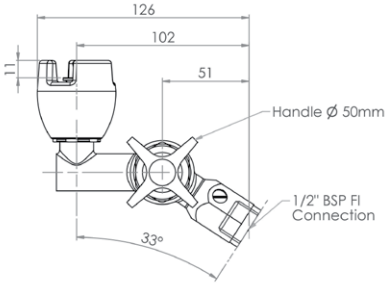


*Exclusions apply

## 45 Degree Lever Handle Bubbler With Silicone Mouthguard


10 YEAR WARRANTY 2 YEAR ONSITE SUPPORT

**T-3MSS-BUBS45L**


- Full S/S Construction
- Self-Closing Valves for Water Efficiency
- Ideally Suited for Our PT-7 Troughs
- Unique Silicone Mouthguard that Protects Teeth
- Working Pressure Range 150kPa-500kPa
- Maximum Operating Temperature 40 Degrees
- WELS 6 Star 1.5LPM




Top




Front




Side

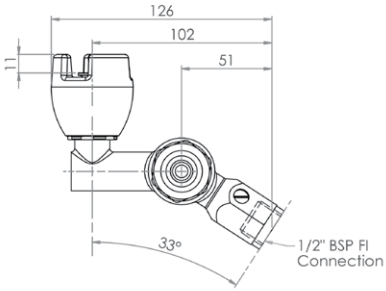


*Exclusions apply

## 45 Degree Push Button Bubbler With Silicone Mouthguard


10 YEAR WARRANTY 2 YEAR ONSITE SUPPORT

**T-3MSS-BUBS45P**


- Full S/S Construction
- Self-Closing Valves for Water Efficiency
- Ideally Suited for Our PT-7 Troughs
- Unique Silicone Mouthguard that Protects Teeth
- Working Pressure Range 150kPa-500kPa
- Maximum Operating Temperature 40 Degrees
- WELS 6 Star 3LPM




Top




Front




Side

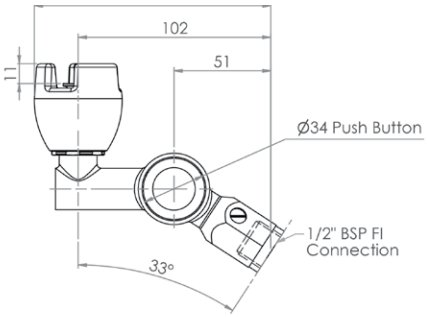


*Exclusions apply

## Remote Hob Mount Bubbler with Silicone Mouthguard


10 YEAR WARRANTY 2 YEAR ONSITE SUPPORT

### T-3MSS-BUBRH


- ½" MI BSP
- Full S/S Construction
- Unique Silicone Mouthguard that Protects Teeth
- Working Pressure Range 150kPa-500kPa
- Maximum Operating Temperature 40 Degrees
- WELS 6 Star 3LPM



Top



Front

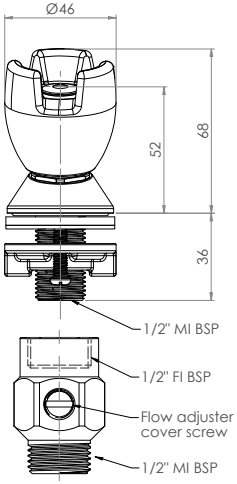


### P-3MSS-TVTF

Time Flow Activation Button

- 1/2" MI BSP Connections
- 304 Grade S/S




### P-3MSSP-ADA-TV

Optional adptors for tight spaces

- Pair of Adaptors to Suit Time Flow Activation Button
- 1/2" FI BSP x M10 Inlet Hose Connection



Side

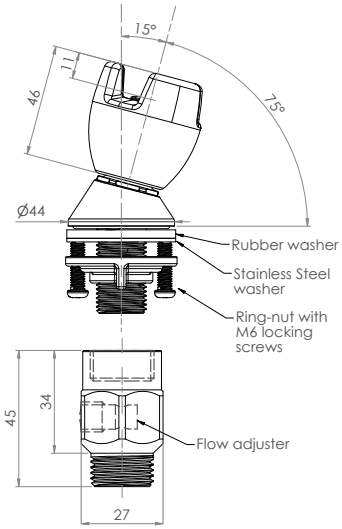


### P-3MSS-TVTF-ADA

Combined unit



* Inlet hoses not supplied

* Can be used in conjunction with an activation device EG: Piezo Buttons or Sensor activators.

*Exclusions apply

3monkeez.com.au

## Wall Mount Silicone Mouthguard Bubbler with Bench Mount Sensor


10 YEAR WARRANTY 10 + 2 YEAR ONSITE SUPPORT

**T-3MSS-BUB90SB** *(battery operated)*


**T-3MSS-BUB90SM** *(mains operated)*

- Infrared 6 Sec Timed Sensor
- Full S/S Construction
- Equipped with 3monkeez Sensor Technology for Hands-Free Operation
- Sensor is Bench Mounted
- Available as Battery Powered or Mains Operated
- ½" FI BSP Inlet
- Unique Rubber Mouthguard that Protects Teeth
- WELS 6 Star 2LPM
- Working Pressure Range 150kPa-500kPa
- Maximum Operating Temperature 40 Degrees
- Battery Powered – 2x CR123 3V Lithium Batteries Estimates 80,000 Cycles


Top





Front




Side

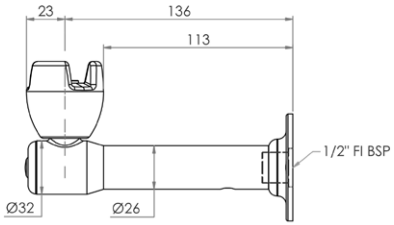






*Exclusions apply

3monkeez.com.au


## Wall Mount Silicone Mouthguard Bubbler with Wall Mount Sensor

10 YEAR WARRANTY 2 YEAR ONSITE SUPPORT


**T-3MSS-BUB90SWB** *(battery operated)*
**T-3MSS-BUB90SWM** *(mains operated)*

- Infrared 6 Sec Timed Sensor
- Full S/S Construction
- Equipped with 3monkeez Sensor Technology for Hands-Free Operation
- Sensor is Wall Mounted
- Available as Battery Powered or Mains Operated
- ½" FI BSP Inlet
- Unique Rubber Mouthguard that Protects Teeth
- WELS 6 Star 2LPM
- Working Pressure Range 150kPa-500kPa
- Maximum Operating Temperature 40 Degrees
- Battery Powered – 2x CR123 3V Lithium Batteries Estimates 80,000 Cycles


Top





Front




Side

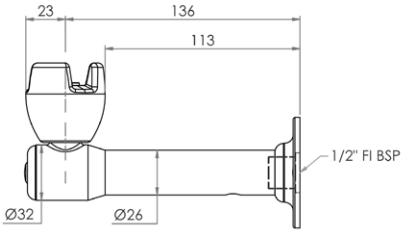


Mounting Body






*Exclusions apply

3monkeez.com.au

## Wall Mount Cam Action Bubbler With Silicone Mouthguard


10 YEAR WARRANTY 10 2 YEAR ONSITE SUPPORT

**T-3MSS-BUB90C**


- Full S/S Construction
- Unique Silicone Mouthguard that Protects Teeth
- ½" FI BSP Inlet
- Self-Closing Valves for Water Efficiency
- Working Pressure Range 150kPa-500kPa
- Maximum Operating Temperature 40 Degrees
- WELS 6 Star 1.5LPM



Front




Side

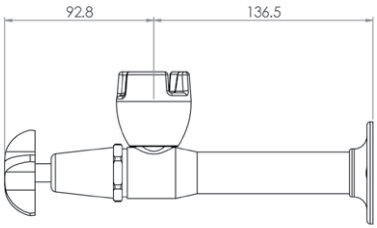


Top




*Exclusions apply


## Wall Mount Lever Handle Bubbler With Silicone Mouthguard

10 YEAR WARRANTY 10 2 YEAR ONSITE SUPPORT


**T-3MSS-BUB90L**

- Full S/S Construction
- Unique Silicone Mouthguard that Protects Teeth
- ½" FI BSP Inlet
- Self-Closing Valves for Water Efficiency
- Working Pressure Range 150kPa-500kPa
- Maximum Operating Temperature 40 Degrees
- WELS 6 Star 1.5LPM

Front





Side

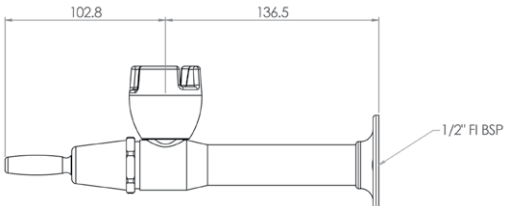




Top

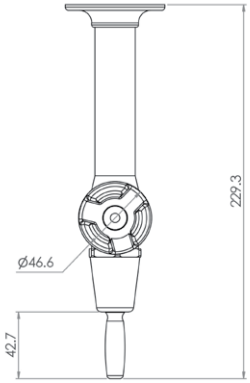


*Exclusions apply


## Wall Mount Push Button Bubbler With Silicone Mouthguard

10 YEAR WARRANTY 10 2 YEAR ONSITE SUPPORT


**T-3MSS-BUB90P**

- Full S/S Construction
- Unique Silicone Mouthguard that Protects Teeth
- ½" FI BSP Inlet
- Self-Closing Valves for Water Efficiency
- Working Pressure Range 150kPa-500kPa
- Maximum Operating Temperature 40 Degrees
- WELS 6 Star 1.5LPM

Front





Side

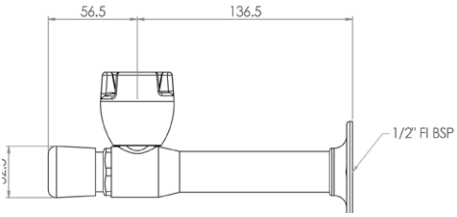




Top




*Exclusions apply

## Timed Sensor Compact Bubbler

10 YEAR WARRANTY 2 YEAR ONSITE SUPPORT

**T-3MSS-BUBCSB** *(battery operated)*


**T-3MSS-BUBCSM** *(mains operated)*

- Infrared 6 Sec Timed Sensor
- Includes Flexi Hose – ½" FI BSP
- Full S/S Construction
- WELS 6 Star 2.5LPM
- Working Pressure Range 150kPa-500kPa
- Maximum Operating Temperature 40 Degrees
- Battery Powered – 2x CR123 3V Lithium Batteries Estimates 80,000 Cycles







Side

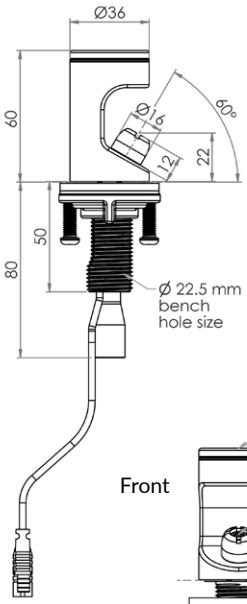


Top



Front

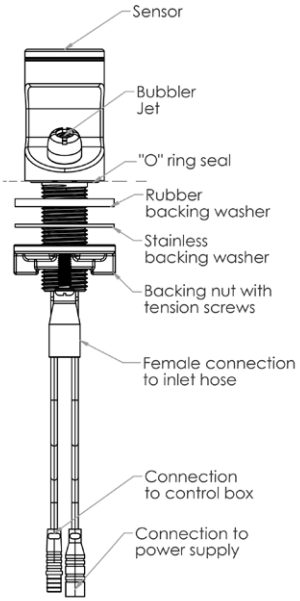


*Exclusions apply

## Compact Lever Handle Bubbler


10 YEAR WARRANTY 10 2 YEAR ONSITE SUPPORT

**T-3MSS-BUBCLH**


- Full S/S Construction
- ½" MI BSP Inlet
- Compact and Hygienic
- WELS 6 Star 1.5LPM
- Working Pressure Range 150kPa-500kPa
- Maximum Operating Temperature 40 Degrees




Top



Side

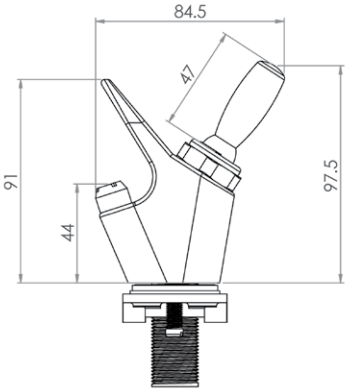


Front

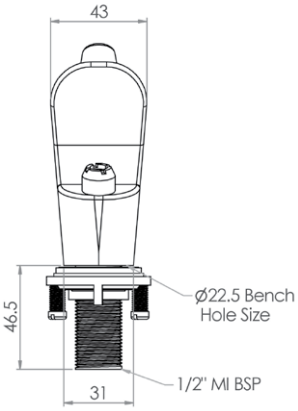


*Exclusions apply

3monkeez.com.au

## Compact Push Button Bubbler

10 YEAR WARRANTY 10 INCLUSIVE 2 YEAR ONSITE SUPPORT

**T-3MSS-BUBCPB**


- Full S/S Construction
- ½" MI BSP Inlet
- Compact and Hygienic
- WELS 6 Star 1.5LPM
- Working Pressure Range 150kPa-500kPa
- Maximum Operating Temperature 40 Degrees




Top



Side

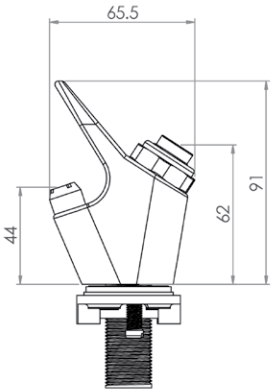


Front

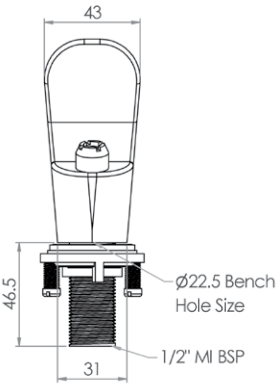


*Exclusions apply

3monkeez.com.au

## Wall Mount Bottle Filler with Bench Mount Sensor


10 YEAR WARRANTY 2 YEAR ONSITE SUPPORT

**T-3MSS-BFSB** *(battery operated)*


**T-3MSS-BFSM** *(mains operated)*

- Infrared 6 Sec Timed Sensor
- Full S/S Construction
- Equipped with 3monkeez Sensor Technology for Hands-Free Operation
- Sensor is Bench Mounted
- Available as Battery Powered or Mains Operated
- ½" FI BSP Inlet
- WELS 6 Star 3LPM
- Working Pressure Range 150kPa-500kPa
- Maximum Operating Temperature 40 Degrees
- Battery Powered – 2x CR123 3V Lithium Batteries Estimates 80,000 Cycles


Top





Front




Side

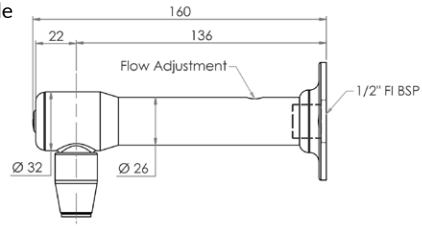












*Exclusions apply

3monkeez.com.au

## Wall Mount Bottle Filler with Wall Mount Sensor


10 YEAR WARRANTY 2 YEAR ONSITE SUPPORT

**T-3MSS-BFSWB** *(battery operated)*


**T-3MSS-BFSWM** *(mains operated)*

- Infrared 6 Sec Timed Sensor
- Full S/S Construction
- Equipped with 3monkeez Sensor Technology for Hands-Free Operation
- Sensor is Wall Mounted
- Available as Battery Powered or Mains Operated
- ½" FI BSP Inlet
- WELS 6 Star 3LPM
- Working Pressure Range 150kPa-500kPa
- Maximum Operating Temperature 40 Degrees
- Battery Powered – 2x CR123 3V Lithium Batteries Estimates 80,000 Cycles


Top





Front




Side

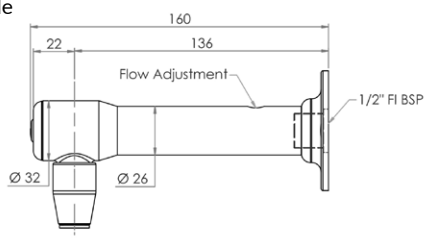



Mounting Body







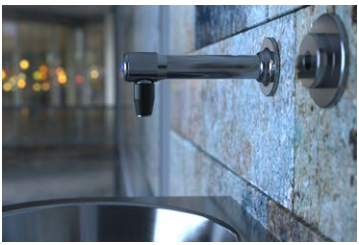

*Exclusions apply

3monkeez.com.au

## Wall Mount Cam Action Bottle Filler


10 YEAR WARRANTY
10 YEAR INTERNAL
2 YEAR ONSITE SUPPORT

### T-3MSS-BFC


- Full S/S Construction
- ½" FI BSP Inlet
- Self-Closing Valves for Water Efficiency
- WELS 6 Star 1.5LPM
- Working Pressure Range 150kPa-500kPa
- Maximum Operating Temperature 40 Degrees




Front




Side

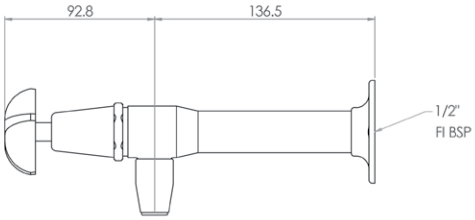


Top

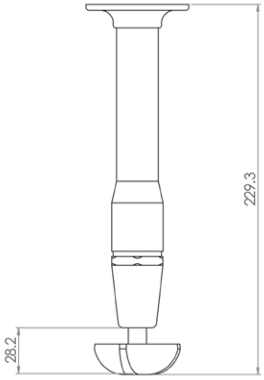


*Exclusions apply


## Wall Mount Lever Handle Bottle Filler

10 YEAR WARRANTY 10 INCLUDING 2 YEAR ONSITE SUPPORT


### T-3MSS-BFL

- Full S/S Construction
- ½" FI BSP Inlet
- Self-Closing Valves for Water Efficiency
- WELS 6 Star 1.5LPM
- Working Pressure Range 150kPa-500kPa
- Maximum Operating Temperature 40 Degrees

Front





Side

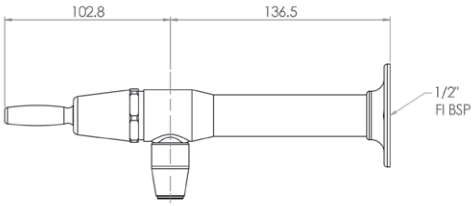




Top

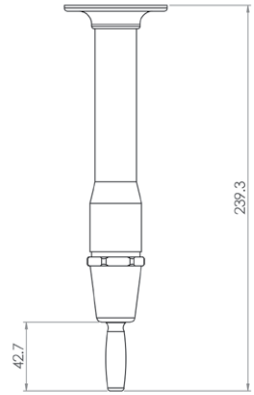


*Exclusions apply


## Wall Mount Push Button Bottle Filler

10 YEAR WARRANTY 10 2 YEAR ONSITE SUPPORT

### T-3MSS-BFP


- Full S/S Construction
- ½" FI BSP Inlet
- Self-Closing Valves for Water Efficiency
- WELS 6 Star 1.5LPM
- Working Pressure Range 150kPa-500kPa
- Maximum Operating Temperature 40 Degrees

Front







Side

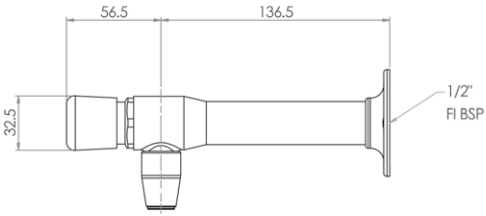


Top




*Exclusions apply

## Bench Mount Sensor Bottle Filler


**T-3MSS-HMSBFB** *(battery operated)*

**T-3MSS-HMSBFM** *(mains operated)*

- Battery Operated or Mains Powered
- Infrared Sensor
- Spout Locks Into 8 Different Positions
- Includes Flexi Hose – ½" FI BSP
- Full S/S Construction
- WELS 6 Star 2.5LPM
- Working Pressure Range 150kPa-500kPa
- Maximum Operating Temperature 70 Degrees
- Battery Powered – 2x CR123 3V Lithium Batteries Estimates 80,000 Cycles



10 YEAR WARRANTY 10 INCLUDING 2 YEAR ONSITE SUPPORT

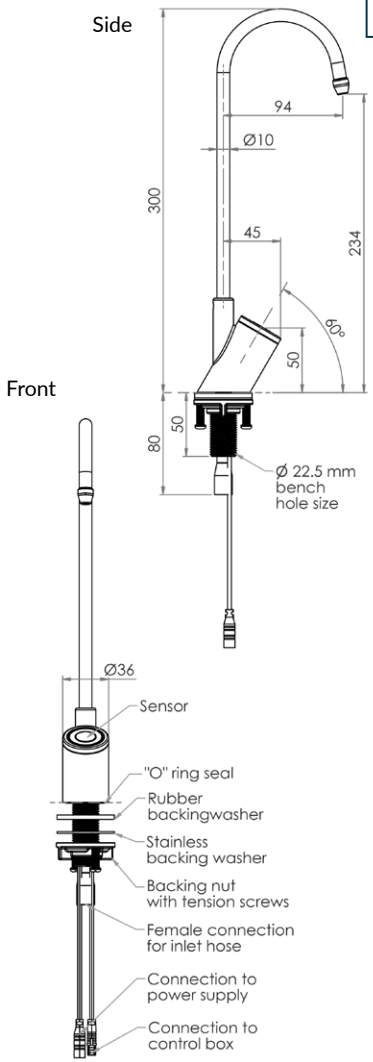


*Exclusions apply

## Bench Mount Stainless Steel Bottle Filler with Cam Handle


10 YEAR WARRANTY 10 2 YEAR ONSITE SUPPORT

### T-3MSS-HBFC


- Spout Locks Into 8 Different Positions
- Full S/S Construction
- WELS 6 Star 3LPM
- Working Pressure Range 150kPa-500kPa
- Maximum Operating Temperature 40 Degrees




Top




Side

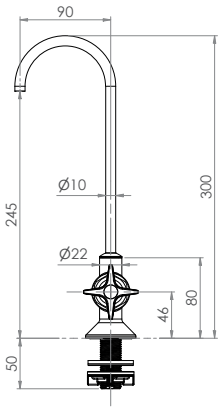


Front

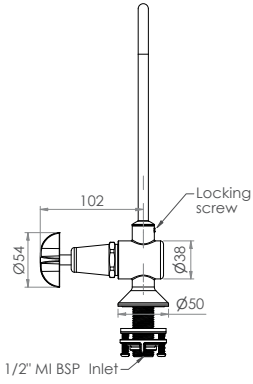


*Exclusions apply

## Bench Mount Stainless Steel Bottle Filler with Lever Handle


10 YEAR WARRANTY 2 YEAR ONSITE SUPPORT

**T-3MSS-HBFL**


- Spout Locks Into 8 Different Positions
- Full S/S Construction
- WELS 6 Star 3LPM
- Working Pressure Range 150kPa-500kPa
- Maximum Operating Temperature 40 Degrees




Top




Side

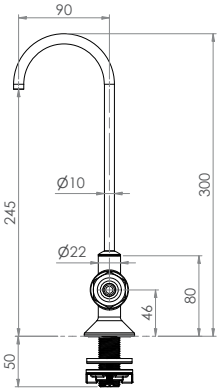


Front

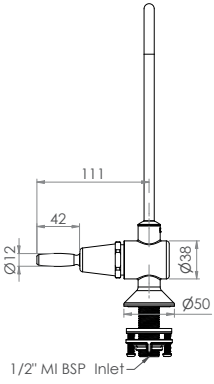


*Exclusions apply

## Bench Mount Stainless Steel Bottle Filler with Push Button


10 YEAR WARRANTY 10 2 YEAR ONSITE SUPPORT

**T-3MSS-HBFP**


- Spout Locks Into 8 Different Positions
- Full S/S Construction
- WELS 6 Star 3LPM
- Working Pressure Range 150kPa-500kPa
- Maximum Operating Temperature 40 Degrees




Top




Side

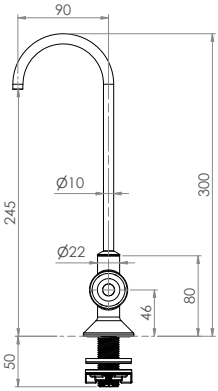


Front

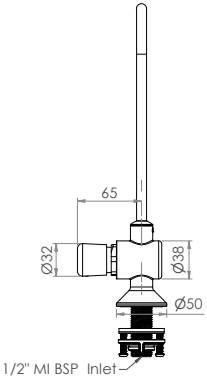


*Exclusions apply

3monkeez.com.au

# Commercial Tapware

Lead Free AS 3718 23145

WATER RATING 3.0 litres per minute

100% STAINLESS STEEL LEAD FREE

CLEANJET® STAINLESS STEEL

10 YEAR WARRANTY 2 YEAR ONSITE SUPPORT


## 45 Degree Cam Action Bottle Filler

**T-3MSS-BF45C**


- Spout Locks Into 8 Different Positions
- Full S/S Construction
- WELS 6 Star 3LPM
- Working Pressure Range 150kPa-500kPa
- Maximum Operating Temperature 40 Degrees




Top




Side

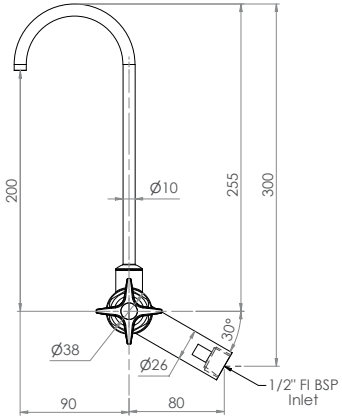


Front

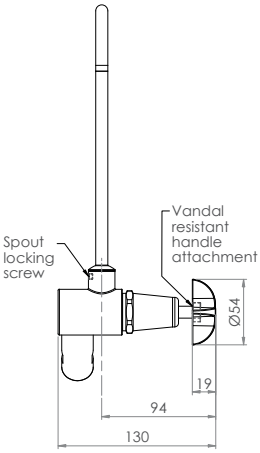


*Exclusions apply

3monkeez.com.au

# Commercial Tapware

Lead Free AS 3718 23145

WATER RATING 3.0 litres per minute

100% STAINLESS STEEL LEAD FREE

CLEANAJET® STAINLESS STEEL

10 YEAR WARRANTY 2 YEAR ONSITE SUPPORT


## 45 Degree Lever Handle Bottle Filler

**T-3MSS-BF45L**


- Spout Locks Into 8 Different Positions
- Full S/S Construction
- WELS 6 Star 3LPM
- Working Pressure Range 150kPa-500kPa
- Maximum Operating Temperature 40 Degrees




Top




Side

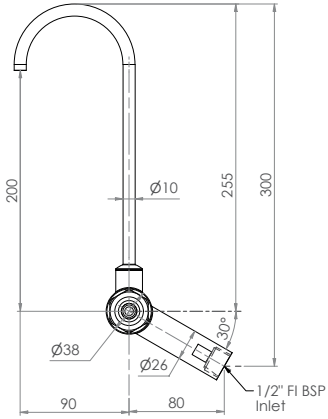


Front

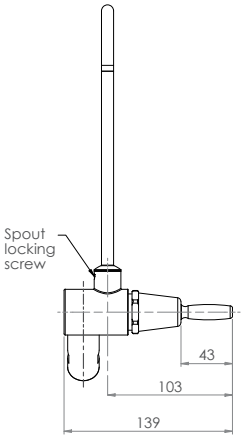


*Exclusions apply

3monkeez.com.au

# Commercial Tapware

Lead Free AS 3718 23145

WATER RATING 3.0 litres per minute

100% STAINLESS STEEL LEAD FREE

CLEANAJET® STAINLESS STEEL

10 YEAR WARRANTY 2 YEAR ONSITE SUPPORT


## 45 Degree Push Button Bottle Filler

**T-3MSS-BF45P**


- Spout Locks Into 8 Different Positions
- Full S/S Construction
- WELS 6 Star 3LPM
- Working Pressure Range 150kPa-500kPa
- Maximum Operating Temperature 40 Degrees




Top




Side

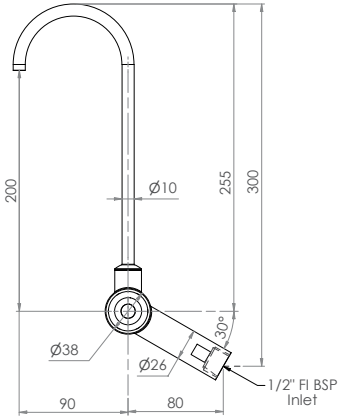


Front

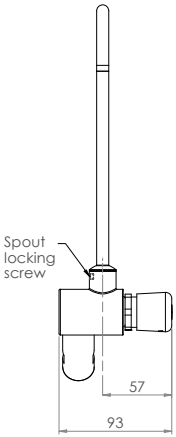


*Exclusions apply

3monkeez.com.au

## Knee & Foot Valves


10 YEAR WARRANTY 10 2 YEAR ONSITE SUPPORT

### P-3MSS-FVM


- Foot/Knee Operated Valve 90 Degree Mount. ½" MI Connections.



Top

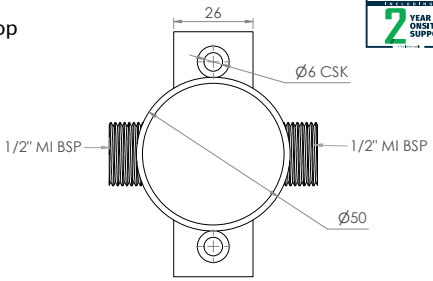


Front





### P-3MSS-45B

- Angled Floor Bracket Suits P-3MSS-FVATF, P-3MSS-FVATF and P-3MSS-FVM



Side

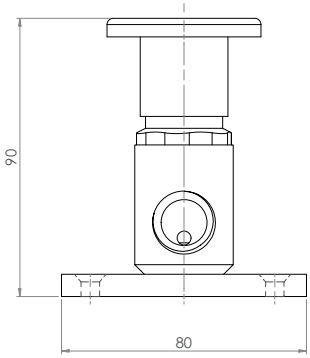


### P-3MSSP-FVMTA

- Replacement Top Assembly



*Exclusions apply

3monkeez.com.au

## Foot Operated Valve Kit

10 YEAR WARRANTY 10 2 YEAR ONSITE SUPPORT

**P-PTKNEEKIT-T** *(includes tempering valve)*
**P-PTKNEEKIT**


- Foot Operated Valve Kit.
  Includes 1x Foot Valve, 1x Spout (WELS 4star, 6.5LPM), 2x Cover Plates, 2x Mini Stops, 2x 1000mm Flexi Hoses




- Optional Angled Floor Bracket P-3MSS-45B




Top





Top





Front





Front




Side

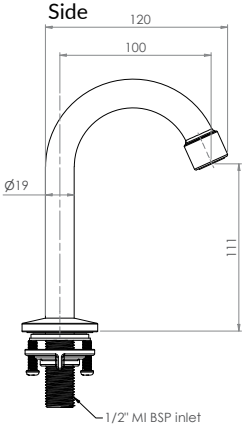


Side




*Exclusions apply

3monkeez.com.au

## Knee & Foot Valves

10 YEAR WARRANTY

2 YEAR ONSITE SUPPORT

### P-3MSS-FVTF


- 18 Second Timed Flow Foot/Knee Operated Valve 90 Degree Mount. ½" MI Connections.

### P-3MSS-FVATF


- Adjustable Timed Flow Foot/Knee Operated Valve 90 Degree Mount. ½" MI Connections.



Top

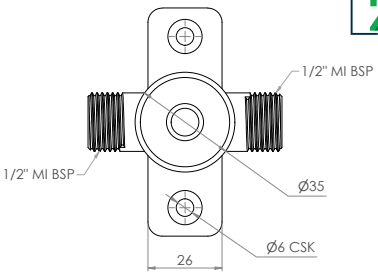


Front





### P-3MSS-45B

- Angled Floor Bracket Suits P-3MSS-FVATF, P-3MSS-FVATF and P-3MSS-FVM



Side

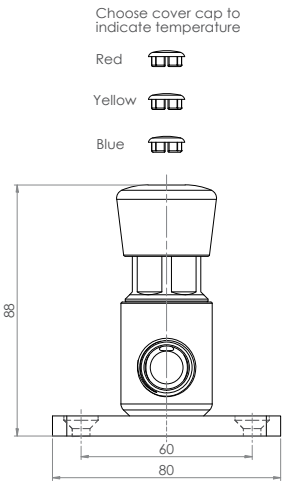




### P-3MSSP-FVATFTA

- Adjustable Timed Flow

### P-3MSSP-FVTFTA

- 18 Second Timed Flow
- Replacement Top Assembly

*Exclusions apply

3monkeez.com.au

## Time Flow Activation Button

10 YEAR WARRANTY

2 YEAR ONSITE SUPPORT


### P-3MSS-TVTF

Time Flow Activation Button


- 1/2" MI BSP Connections
- 304 Grade S/S




Top



Bottom



Front

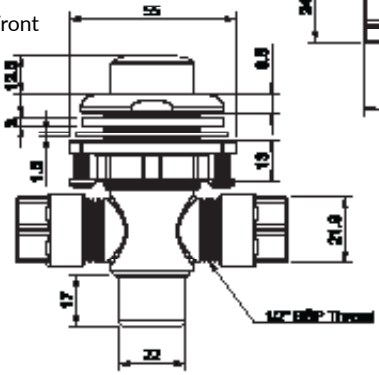


### P-3MSSP-ADA-TV

Optional adptors for tight spaces

- Pair of Adaptors to Suit Time Flow Activation Button
- 1/2" FI BSP x M10 Inlet Hose Connection



Side

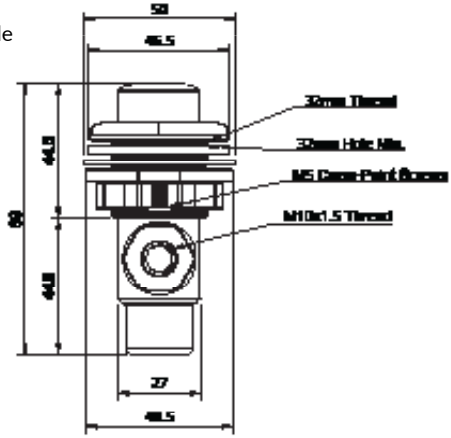

### P-3MSS-TVTF-ADA

Combined unit



* Inlet hoses not supplied

*Exclusions apply


3monkeez.com.au

## Knee Operated Wand Valve

10 YEAR WARRANTY + 2 YEAR ONSITE SUPPORT

### P-3MSS-KWA

- Full S/S Body with Nylon Wand
- Timed Flow Shut Off
- Hands Free Operation
- Robust Lever for Heavy Usage
- The Knee Lever Can Be Operated in Any Direction to Activate Water Flow
- Adjustable 0-18 Seconds
- Working Pressure Range 150 – 500kPa

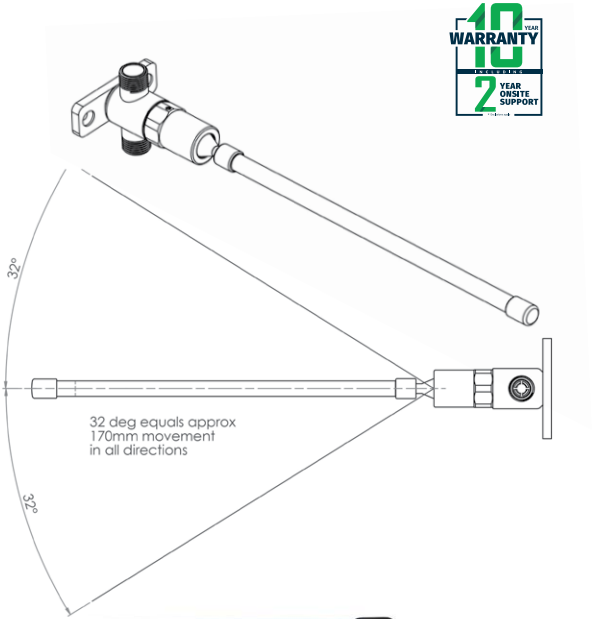





### P-3MSSP-KW

- Replacement to Wand and Spring



Front





### T-3MSSP-BOBCART

- Replacement Adjustable Timed Flow Cartridge



Top

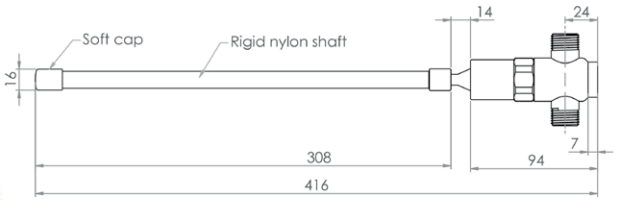


*Exclusions apply

3monkeez.com.au


## Knee Operated Valve Kit

10 YEAR WARRANTY 10 2 YEAR ONSITE SUPPORT

**TP08045K**


- Knee Operated Valve Kit. Includes 1x Knee Wand, 1x Spout (WELS 4star, 6.5LPM), 2x Cover Plates, 2x Mini Stops, 1x 300mm and 1x 450mm Flexi Hoses




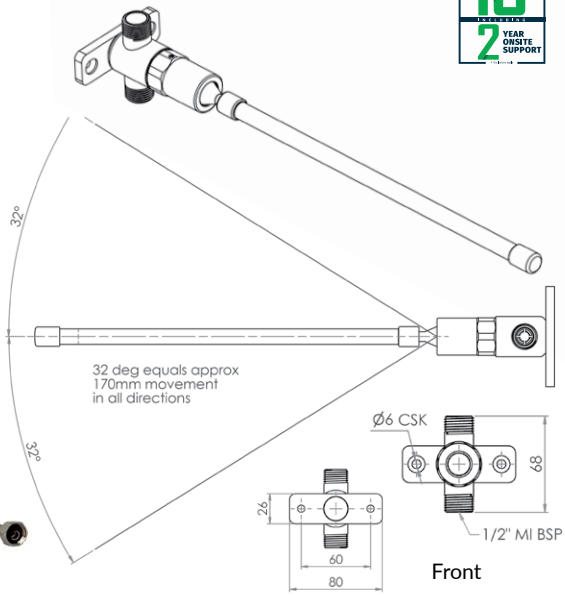








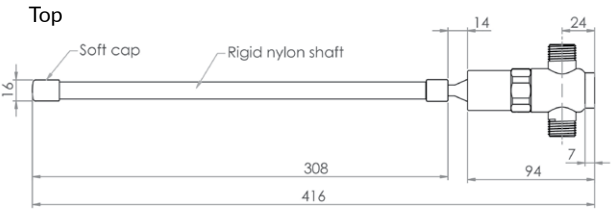
*Exclusions apply
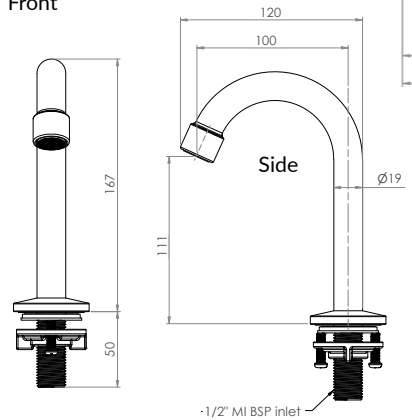
# Commercial Tapware

Lead Free AS4032.1 26648

Lead Free AS4032.2 26648

## Thermostatic Mixing Valve and Tempering Valve

2 YEAR WARRANTY

### TMV15-BV


- 1/2" MI BSP Adjustable Thermostatic Mixing Valve with Ball Valves
- Lead Free Brass
- Pre-Set 38 Degrees



Top



Side

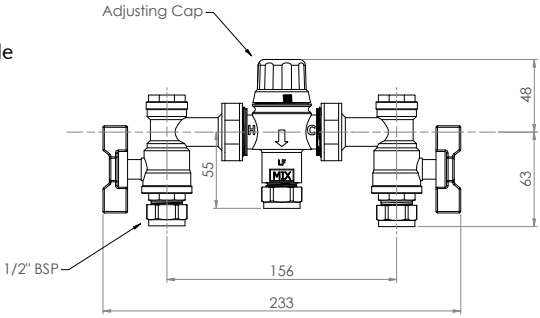


### TVA15


- 1/2" MI BSP Standard Adjustable Tempering Valve
- Lead Free Brass
- Pre-Set 38 Degrees



Top



Side

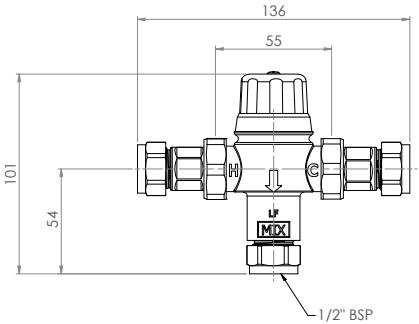


*Exclusions apply

3monkeez.com.au

# Commercial Tapware


## Cleaners Sink Tap Set

**T-3MCSTS** *(complete set)*
**T-3MCSS** *(spout only)*
**T-3MCSWS** *(wall stops only)*








**Top**

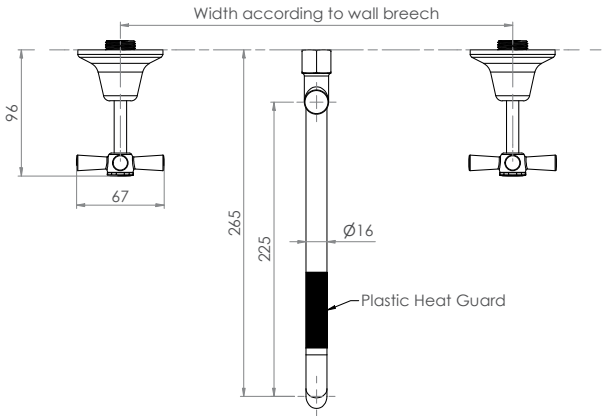


**Front**

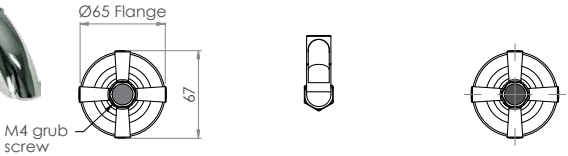


**Side**

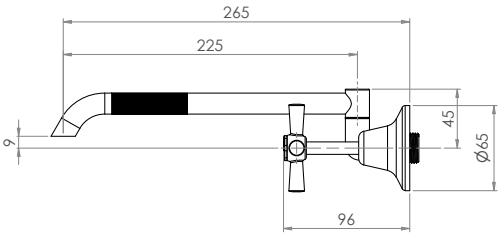


*Exclusions apply

3monkeez.com.au

## Swivel Cleaner's Sink Spout

10 YEAR WARRANTY


**T-3MSS-CSS**


- ½" FI BSP
- 190mm Projection
- WELS 3 Star 8.5LPM
- 80 Deg Max Op Temperature
- 150kPa - 500kPa Working Pressure Range






**Top**

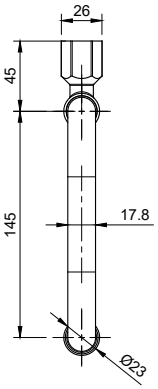



**Side**

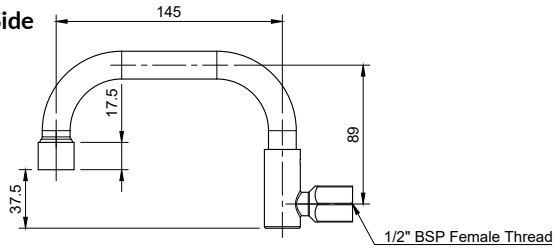


**Front**




*Exclusions apply

## Cleaner's Sink Tap Set w/ Swivel Spout & ¼ Turn CD Lever Top Assembly

10 YEAR WARRANTY


**T-3MSS-CSLTS**

- ¼ Turn Ceramic Disc Lever Top Assembly
- Spout-½" FI BSP
- 190mm Projection
- WELS 3 Star 8.5LPM
- 80 Deg Max Op Temp
- 150kPa - 500kPa Working Pressure Range







**Top**

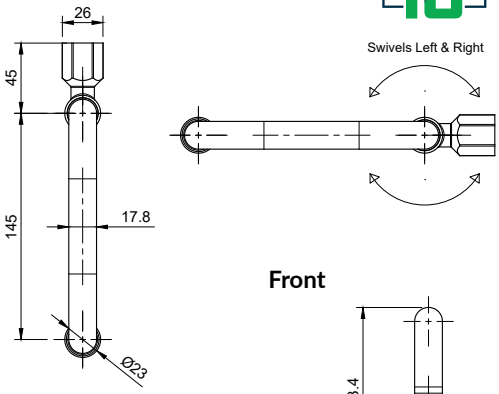



**Front**





**Side**

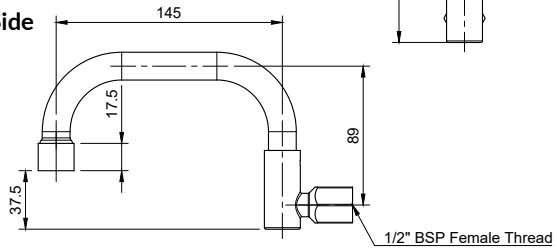


**Front**




**Side**




*Exclusions apply

## Cleaner's Sink Tap Set w/ Swivel Spout & ¼ Turn CD Cross Top Assembly

10 YEAR WARRANTY


### T-3MSS-CSCTS

- ¼ Turn Ceramic Disc Cross Handle Top Assembly
- Spout-½" FI BSP
- 190mm Projection
- WELS 3 Star 8.5LPM
- 80 Deg Max Op Temp
- 150kPa - 500kPa Working Pressure Range







**Top**

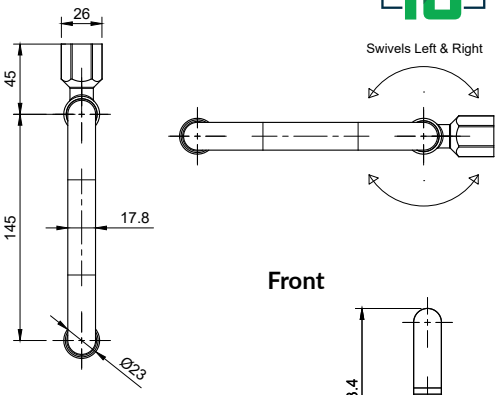



**Front**





**Side**

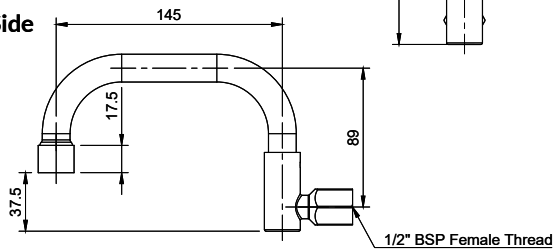


**Front**




**Side**




*Exclusions apply

## Cleaners Sink Exposed Wall Mount Body with Fixed Spout and Wall Bracket


10 YEAR WARRANTY 2 YEAR ONSITE SUPPORT

### T-3MCSKIT-E08


- Full S/S Construction
- Exposed Wall Mount Tap Body Including Spreaders and ½ Turn Rising Spindle
- Available with a Fixed Spout – WELS 3 Star 8LPM
- ½" FI BSP Inlets
- 275mm Projection from Wall
- Adjustable Wire Length on Bracket
- Bucket Hook on Bracket
- Working Pressure Range 150kPa-500kPa
- Maximum Operating Temperature 80 Degrees




Top

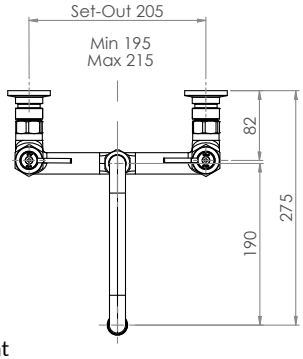


Front




Side

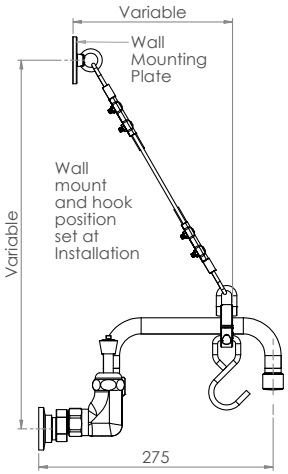


*Exclusions apply


## Cleaners Sink Concealed Wall Mount Spout with Wall Stops and Wall Bracket

10 YEAR WARRANTY 2 YEAR ONSITE SUPPORT

**T-3MCSKIT-C08**


- Full S/S Construction
- Straight Spout with ¼ Turn Ceramic Disc Cross Handle Wall Stops
- WELS 3 Star 8LPM
- ½" FI BSP Inlet
- 275mm Projection
- Adjustable Wire Length on Bracket
- Bucket Hook on Bracket
- Working Pressure Range 150kPa-500kPa
- Maximum Operating Temperature 80 Degrees

Side

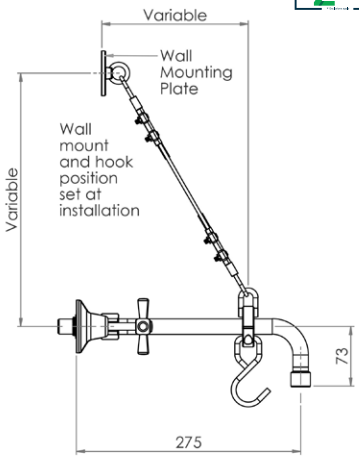





Top

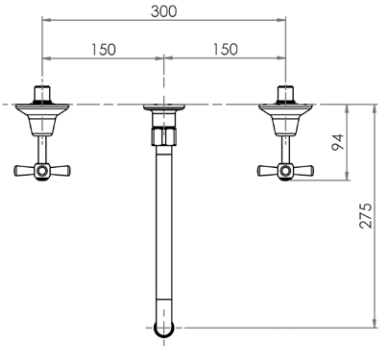


Front





*Exclusions apply

# Commercial Tapware

## Hot Wash Reel & Trigger Valve

**T-TWHWR1215SG** *(hot wash reel, hose and gun)*
**T-TWHWR1215** *(hot wash reel and hose)*
**T-TWSGV65SVL** *(trigger gun)*

- Reel Hose is 12mm Internal Diameter x 15m Length
- Reel Has ½" FI BSP Inlet
- Reel Has ½" MI BSP Outlet
- Trigger Valve Has ½" FI BSP Inlet
- Maximum Working Pressure 550kPa
- Maximum Operating Temperature 80 Degrees









**T-TWHWR1215**
**(Hot Wash Reel and Hose)**

Front




Side






**T-TWSGV65SVL**
**(Trigger Gun)**

*Exclusions apply

3monkeez.com.au

# Glass & Jug Rinsers

WMTS 101
040292


## Glass/Milk Jug Rinser Valve Assembly with Actuator Star

2 YEAR WARRANTY

### R-GRV

- ½" MI BSP Connection
- 114mm Star Diameter
- Easy Installation
- No Sharp Edges
- Minimum Temperature - 5° Celsius
- Maximum Temperature - 35° Celsius
- Watermarked
- Working Pressure Range 150kPa-350kPa

Top

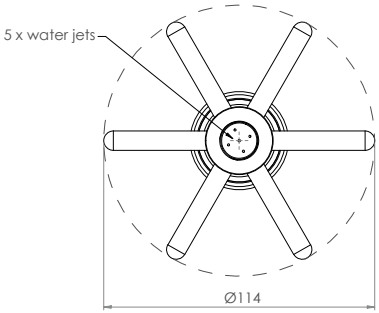






**R-PRP-GRVKIT**




**R-PRP-ACTSTAR**
(Stainless steel option available)





**R-PRP-GRVORINGKIT**

Side

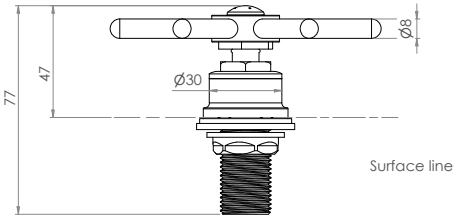


Pressure Reduction Valve recommended to be used with this product.

*Exclusions apply

3monkeez.com.au

# Glass & Jug Rinsers

WMTS 101
040292


## Kitchen Sink Glass Rinser with Round Drain Tray

2 YEAR WARRANTY

### R-KGR-100

- 121mm Diameter Tray
- ½" MI BSP Connection
- Easy Installation
- Actuator Star Design Helps to Prevent The Build Up of Milk Residue
- Minimum Temperature - 5° Celsius
- Maximum Temperature - 35° Celsius
- 304 Grade Stainless Steel Tray
- Watermarked
- Working Pressure Range 150kPa-350kPa

Top

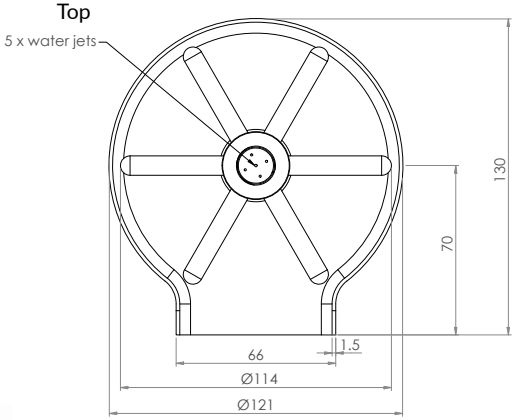




R-PRP-GRVKIT






R-PRP-ACTSTAR
(Stainless steel option available)





R-PRP-GRVORINGKIT

Side

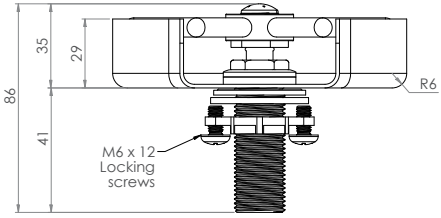


Pressure Reduction Valve recommended to be used with this product.

*Exclusions apply

3monkeez.com.au

# Glass & Jug Rinsers

WMTS 101
040292


## Glass/Milk Jug Rinser Compact

2 YEAR WARRANTY


**R-PR-SJ150**

- 114mm Star Diameter
- ½" MI BSP Connection
- Includes Drain Elbow
- Easy Installation
- Actuator Star Design Helps to Prevent The Build Up of Milk Residue
- No Sharp Edges; Corners Are Rounded for Safety
- Minimum Temperature - 5° Celsius
- Maximum Temperature - 35° Celsius
- 304 Stainless Steel Tray
- Watermarked
- Working Pressure Range 150kPa-350kPa

Top

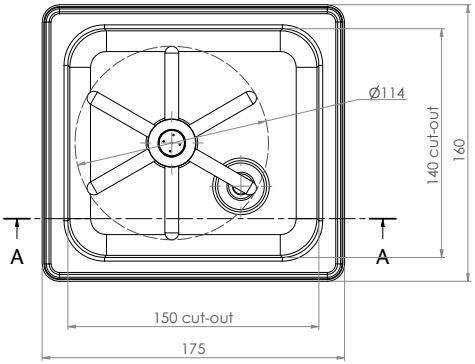


Side

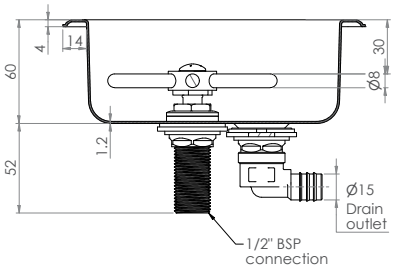






**R-PRP-GRVKIT**



**R-PRP-ACTSTAR**
(Stainless steel option available)



Pressure Reduction Valve recommended to be used with this product.



**R-PRP-OUTLET**



**R-PRP-GRVORINGKIT**

*Exclusions apply

3monkeez.com.au

# Glass & Jug Rinsers

WMTS 101
040292


## Glass/Milk Jug Rinser with Drain Tray

2 YEAR WARRANTY


### R-PR-SJD300

- ½" MI BSP Connection
- Includes Drain Elbow
- 114mm Star Diameter
- Minimum Temperature - 5° Celsius
- Maximum Temperature - 35° Celsius
- Removable Grate - Makes Cleaning Easy
- 304 Grade Stainless Steel Tray
- Watermarked
- Working Pressure Range 150kPa-350kPa

Top

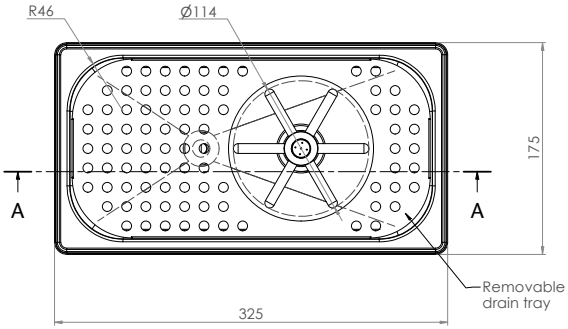


Side

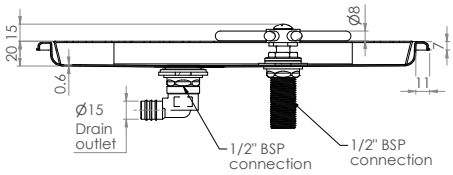






Pressure Reduction Valve recommended to be used with this product.



R-PRP-GRVKIT



R-PRP-ACTSTAR
(Stainless steel option available)



R-PRP-OUTLET



R-PRP-GRVORINGKIT

*Exclusions apply

3monkeez.com.au

# Glass & Jug Rinsers

WMTS 101
040292


## Glass/Milk Jug Rinser with Drain Tray

2 YEAR WARRANTY


### R-PR-SJD600

- ½" MI BSP Connection
- Includes Drain Elbow
- 114mm Star Diameter
- Minimum Temperature - 5° Celsius
- Maximum Temperature - 35° Celsius
- Removable Grate - Makes Cleaning Easy
- 304 Grade Stainless Steel Tray
- Watermarked
- Working Pressure Range 150kPa-350kPa

Top

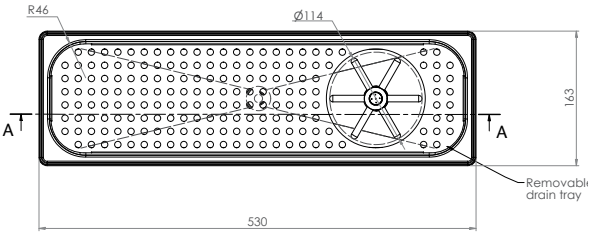


Side

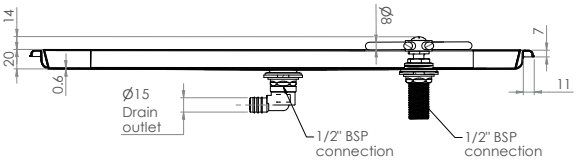




Pressure Reduction Valve recommended to be used with this product.



R-PRP-GRVKIT



R-PRP-ACTSTAR
(Stainless steel option available)



R-PRP-OUTLET




R-PRP-GRVORINGKIT

*Exclusions apply

3monkeez.com.au

# Accessories & Spare Parts

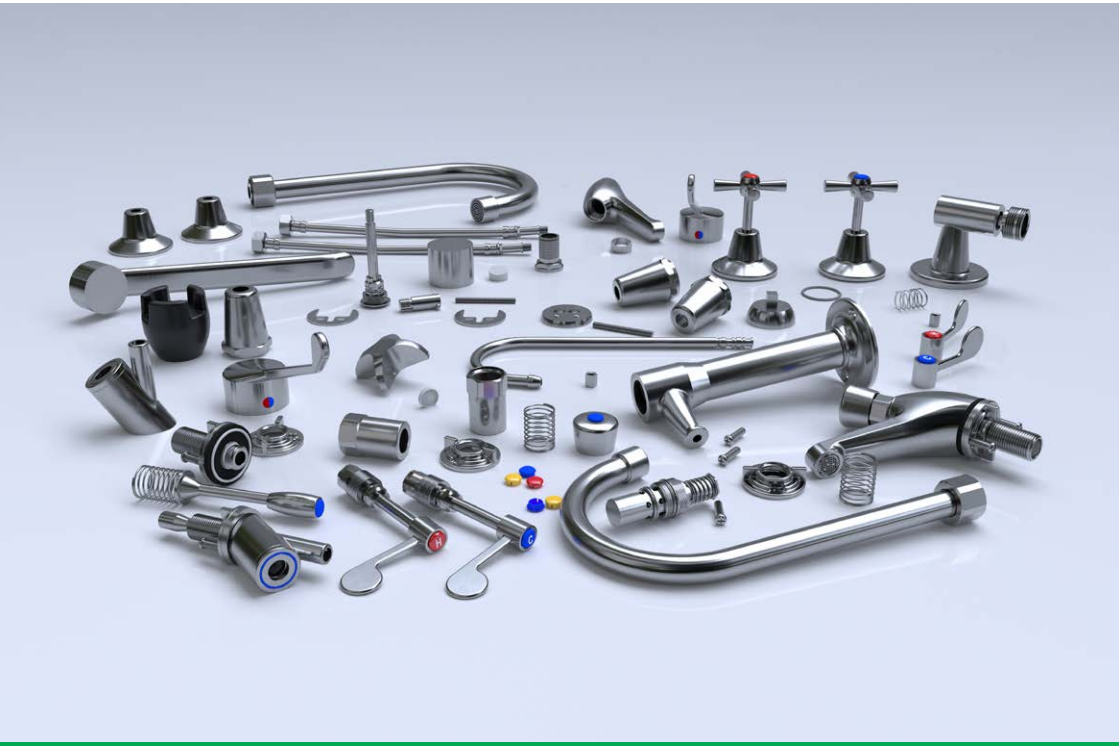

## Comprehensive range of spare parts available








## Pre-Rinse Sub Assembly

**T-3M2928**

- Full S/S Construction
- ⅜" MI BSP Riser Thread
- Equipped with a Water Saving 6 Star 4.5LPM Variable Trigger Valve
- Fully Assembled and Bench Tested, with a Unique Traceable Serial Number
- Working Pressure Range 150kPa-500kPa
- Maximum Operating Temperature 80 Degrees



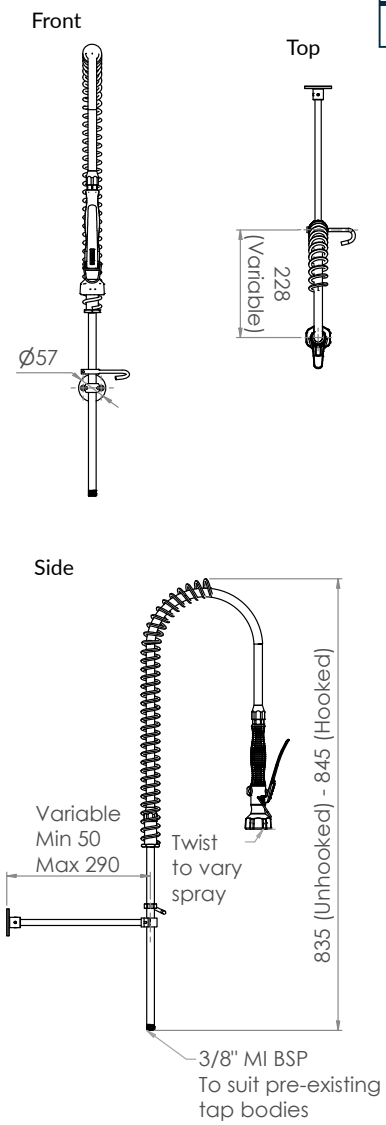


*Exclusions apply

# Accessories & Spare Parts

Lead Free AS 3718 23145

WATER RATING 4.5 litres per minute

100% STAINLESS STEEL LEAD FREE

CLEANAJET® STAINLESS STEEL


10 YEAR WARRANTY 10 2 YEAR ONSITE SUPPORT

## Compact Pre-Rinse Sub Assembly


**T-3M2928-C**

- Full S/S Construction
- ⅜" MI BSP Riser Thread
- Equipped with a Water Saving 6 Star 4.5LPM Variable Trigger Valve
- Fully Assembled and Bench Tested, with a Unique Traceable Serial Number
- Working Pressure Range 150kPa-500kPa
- Maximum Operating Temperature 80 Degrees

Top





Side

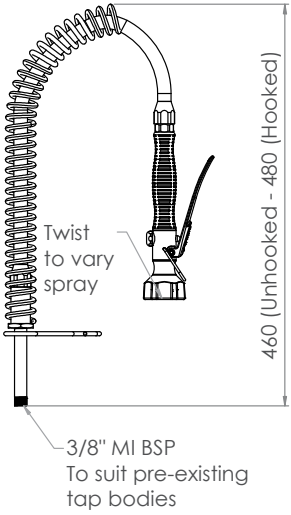




Front



*Exclusions apply

# Accessories & Spare Parts

Lead Free AS 3718 23145

WATER RATING 4.5 litres per minute (spray top) 4 star 7.5 litres per minute

100% STAINLESS STEEL LEAD FREE

CLEANAJET® STAINLESS STEEL

10 YEAR WARRANTY 2 YEAR ONSITE SUPPORT


## Pre-Rinse Sub Assembly with Pot Filler

**T-3M2928-06** – *6" pot filler*

**T-3M2928-12** – *12" pot filler*

- Full S/S Construction
- ⅜" MI BSP Riser Thread
- Equipped with a Water Saving 6 Star 4.5LPM Variable Trigger Valve
- Available with 6" or 12" Pot Filler – 4 Star 7.5LPM
- Fully Assembled and Bench Tested, with a Unique Traceable Serial Number
- Working Pressure Range 150kPa-500kPa
- Maximum Operating Temperature 80 Degrees



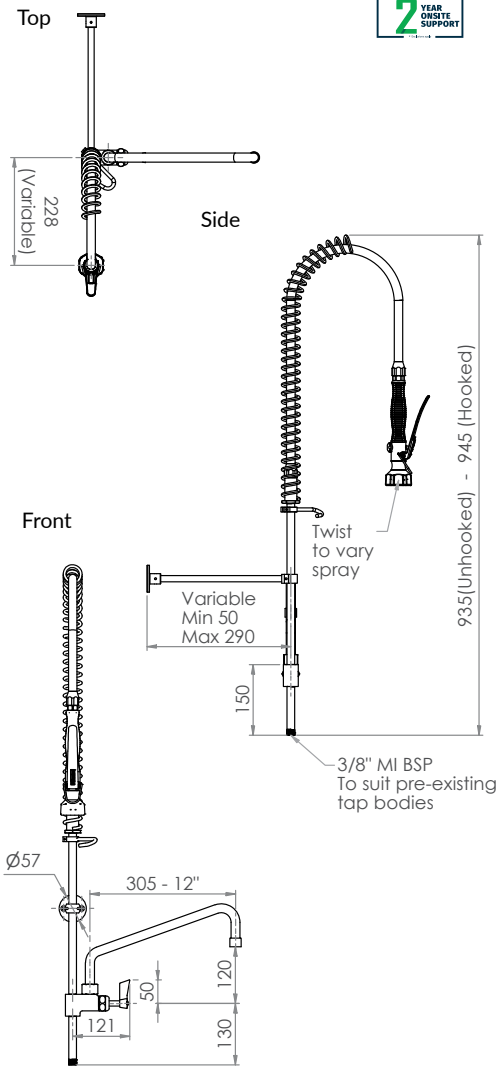


*Exclusions apply

# Accessories & Spare Parts

Lead Free AS 3718 23145

WATER RATING 4.5 stars 4 star

100% STAINLESS STEEL LEAD FREE

CLEANAJET® STAINLESS STEEL

10 YEAR WARRANTY 10 2 YEAR ONSITE SUPPORT

## Compact Pre-Rinse Sub Assembly with Pot Filler


**T-3M2928-06-C** – *6" pot filler*

**T-3M2928-12-C** – *12" pot filler*


- Full S/S Construction
- ⅜" MI BSP Riser Thread
- Equipped with a Water Saving 6 Star 4.5LPM Variable Trigger Valve
- Available with 6" or 12" Pot Filler – 4 Star 7.5LPM
- Fully Assembled and Bench Tested, with a Unique Traceable Serial Number
- Working Pressure Range 150kPa-500kPa
- Maximum Operating Temperature 80 Degrees




Top




Side

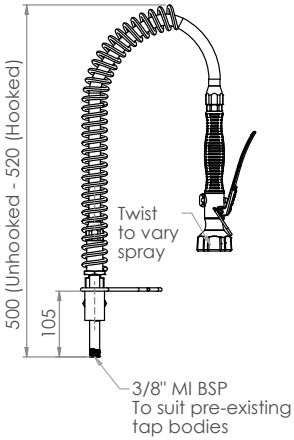


Front

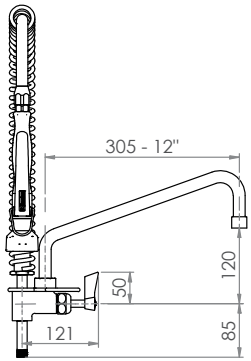


*Exclusions apply

3monkeez.com.au


## Dual Bench Mount Tap Body

10 YEAR WARRANTY

**T-3M63134**


- Full S/S Construction
- Dual Bench Tap Body Includes Inlet Hoses
- ½ Turn Rising Spindles
- Inlet Hoses Have ½" FI BSP Loose Nut and Tail
- ⅜" FI BSP Riser Connection
- Working Pressure Range 150 – 500kPa
- Maximum Hot Water Temperature – 80°C

Front

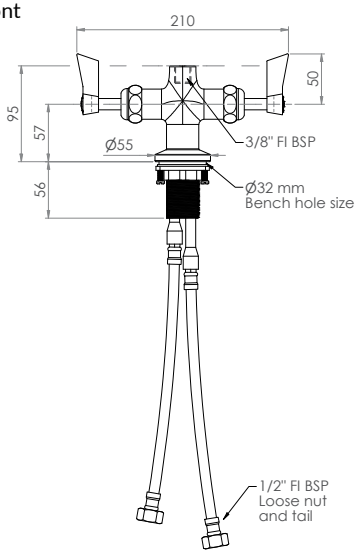





Top



Side



*Exclusions apply

3monkeez.com.au

## Single Bench Mount Body


10 YEAR WARRANTY

**T-3M63300**

- Single Bench Mount with ½" MI BSP Inlet
- ⅜" FI BSP Riser Connection
- ½ Turn Rising Spindle




Top



Front



Side

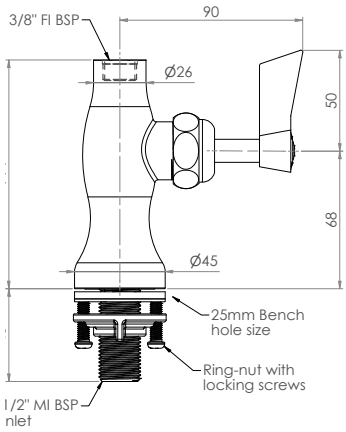


*Exclusions apply

3monkeez.com.au

## Exposed Wall Mount Tap Body


10 YEAR WARRANTY

**T-3M61689**


- Full S/S Construction
- Exposed Wall Mount Tap Body Including Spreaders and ½ Turn Rising Spindles
- ½" FI BSP Inlets
- ⅜" FI BSP Riser Connection
- Working Pressure Range 150kPa-500kPa
- Maximum Operating Temperature 80 Degrees




Top

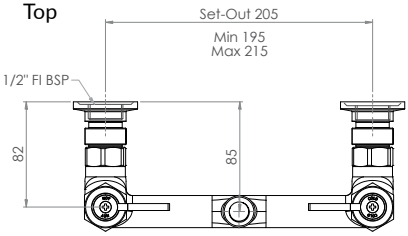


Front




Side

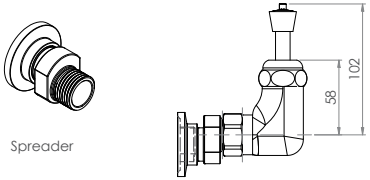


Spreader

*Exclusions apply

## Single Wall Mount Body


10 YEAR WARRANTY

**T-3M63700**


- Single Wall Mount with ½" FI BSP Inlet
- ¾" MI BSP Outlet
- ½ Turn Rising Spindle




Top



Side




Front




*Exclusions apply

3monkeez.com.au

## Wall Elbow & Bench Outlet

10 YEAR WARRANTY


**T-3MWELB-C** - *Wall Elbow*

**T-3M2927-AR** - *Bench Outlet*


- Full S/S Construction
- ½" FI BSP Inlet
- ⅜" FI BSP Riser Connection




Top





Side

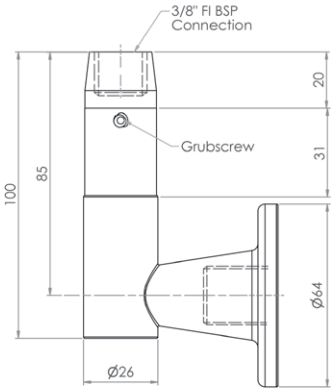




T-3M2927-AR

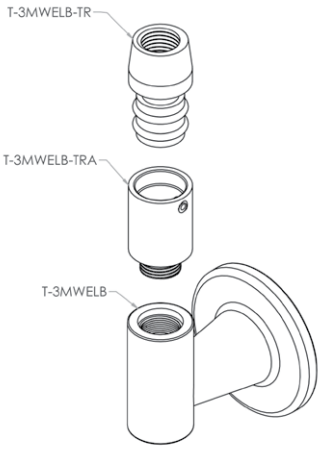


*Exclusions apply

## Lever Handle Top Assembly

10 YEAR WARRANTY


**T-3M60200**

*Wall Top Assembly*

- ¼ Turn Ceramic Disc Lever Handles
- Stainless Steel Outer, Brass Internals
- ½" MI BSP



Front





**T-3M60210**

*Basin Top Assembly*

- ¼ Turn Ceramic Disc Lever Handles
- Stainless Steel Outer, Brass Internals
- ½" MI BSP



Side

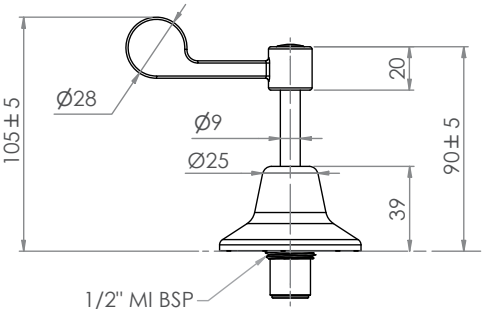


*Exclusions apply

## Cross Handle Top Assembly

10 YEAR WARRANTY


### T-3M60300

*Wall Top Assembly*


- ¼ Turn Ceramic Disc Cross Handles
- Stainless Steel Outer, Brass Internals



Top




Front

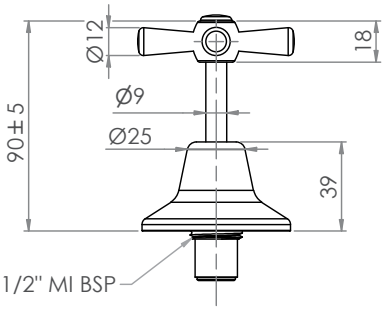



### T-3M60310

*Basin Top Assembly*


- ¼ Turn Ceramic Disc Cross Handles
- Stainless Steel Outer, Brass Internals



Top




Front

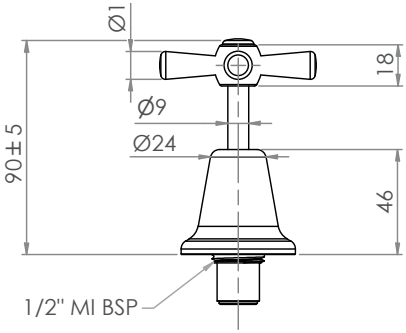


*Exclusions apply

3monkeez.com.au

# Accessories & Spare Parts

Lead Free AS 3718 23145

WATER RATING 8.0 litres per minute

100% STAINLESS STEEL LEAD FREE


CLEANAJET STAINLESS STEEL


## Pot Fillers & Risers

10 YEAR WARRANTY

**T-3M203006** *(6" pot filler)*
**T-3M203012** *(12" pot filler)*

- Full S/S Construction
- Risers Have ⅜" MI BSP Connections
- Pot Filler Tap Body Has ⅜" FI BSP Connections
- 152mm and 305mm Spout Available - 4 Star 7.5LPM

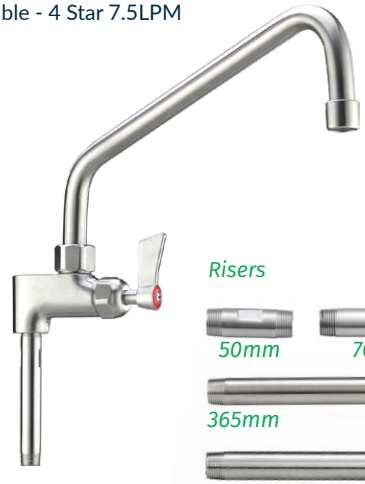

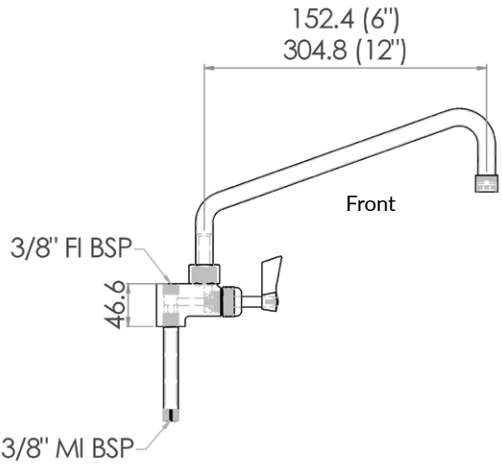





| RISERS TO SUIT TAP BODY TO UNDERSIDE OF POT FILLER BODY | RISERS TO SUIT TOP SIDE OF POT FILLER BODY OR MAIN TAP BODY TO SPRING TO RISER ADAPTOR |
|---|---|
| T-3M2927-50 | T-3M2927-50T |
| T-3M2927-70 | T-3M2927-70T |
| T-3M2927-115 | T-3M2927-115T |
| T-3M2927-135 | T-3M2927-135T |
| | T-3M2927-365 |
| | T-3M2927-400 |

*Exclusions apply

3monkeez.com.au

# Accessories & Spare Parts

100% STAINLESS STEEL LEAD FREE

CLEAN A JET® STAINLESS STEEL

## Pre-Rinse Accessories

### T-3M533814-B - SPRING TO RISER ADAPTOR

- Stainless Steel Construction
- Suits ⅜" MI BSP Riser
- Suits ½" FI BSP Pre-Rinse Hose

T-3M533814-B



### T-3M8206 AND T-3M8206-C - HOSE HOOK

- Stainless Steel Construction
- Retains Pre-Rinse Hose and Trigger Valve

T-3M8206



T-3M8206-C



### T-3M2902-300 - WALL BRACKET 300MM LONG

- Stainless Steel Construction
- Adjustable - 50mm - 300mm

T-3M2902-300



### T-3M8101 - SPRING GUARD

- Stainless Steel Construction
- Heavy Duty
- Suits Full Pre-Rinse

T-3M8101



### T-3M8101-C - SPRING GUARD FOR COMPACT

- Stainless Steel Construction
- Heavy Duty
- Suits Compact Pre-Rinse

T-3M8101-C



*Exclusions apply

3monkeez.com.au

# Accessories & Spare Parts

Lead Free AS 3499 26914 | 100% STAINLESS STEEL LEAD FREE | CLEANAJET® STAINLESS STEEL

## Pre-Rinse Hoses

1 YEAR WARRANTY

### T-3M2914-C / T-3M2910
### T-3M2911 / T-3M2912

- ½" FI BSP Ends

### T-3M2914-S-A

- Includes Adaptors - ¼" MI BSP x ¾" MI UNS

### T-3M561234

- Suits Fisher Handle and ½" FI BSP Hose

### T-3M561214

- Suits Fisher Riser Adaptor and ½" FI BSP Hose

### T-3M56EN12

- Suits Encore and T&S Riser Adaptor and ½" FI BSP Hose

**T-3M2914-C - 625MM**
**T-3M2910 - 1000MM**
**T-3M2912 - 1200MM**
**T-3M2911 - 1520MM**



Also suits Enware, Galvin and Rinse-Maid

**T-3M2914-S-A - 1000MM**



Suits Fisher

**T-3M561234**



Adaptor
½" MI BSP x ¾" MI UNS

**T-3M561214**



Adaptor
½" MI BSP x ¼" MI BSP

**T-3M56EN12**



Adaptor
½" MI BSP x ¾" FI UNS

*Exclusions apply

# Accessories & Spare Parts

100% STAINLESS STEEL LEAD FREE

CLEANAJET® STAINLESS STEEL

## Tap Body Accessories

1 YEAR WARRANTY

### T-3M4016 - INLET HOSES (PAIR)

- ½″ FI BSP Loose Nut and Tail to M-10
- Suits T-3M63134

T-3M4016



### T-3M2000-0001 - JUMPER VALVE AND SPRING

- Stainless Steel
- Suits T-3M63134, T-3M61689, T-3M63300, T-3M63700, T-3M203006 and T-3M203012

T-3M2000-0001



### T-3M2000-0002 - HANDLE ONLY - HOT

- Stainless Steel
- Suits T-3M63134, T-3M61689, T-3M63300, T-3M63700, T-3M203006 and T-3M203012

T-3M2000-0002



### T-3M2000-0003 - HANDLE ONLY - COLD

- Stainless Steel
- Suits T-3M63134, T-3M61689, T-3M63300, T-3M63700, T-3M203006 and T-3M203012

T-3M2000-0003



### T-3M2000-0004 - TAP BODY REPAIR KIT - HOT

- Stainless Steel
- Suits T-3M63134 and T-3M61689

T-3M2000-0004



### T-3M2000-0005 - TAP BODY REPAIR KIT - COLD

- Stainless Steel
- Suits T-3M63134 and T-3M61689, T-3M63300 and T-3M63700

T-3M2000-0005



### T-3M2000-0006 - POT FILLER REPAIR KIT

- Stainless Steel
- Suits T-3M203006 and T-3M203012

T-3M2000-0006



### T-3M5016 - INLET HOSE

- ½″ FI BSP Loose Nut and Tail Ends
- Suits T-3M63300

T-3M5016



*Exclusions apply

3monkeez.com.au

# Accessories & Spare Parts


## Trigger Valve & Handle

**T-3M2951**


- Full S/S Construction
- Self Closing High Water Efficient 6 Star 4.5LPM VARIABLE Trigger Valve
- Stay Open Clip for Prolonged Use



Side

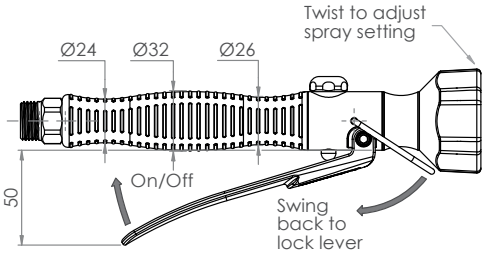


Top

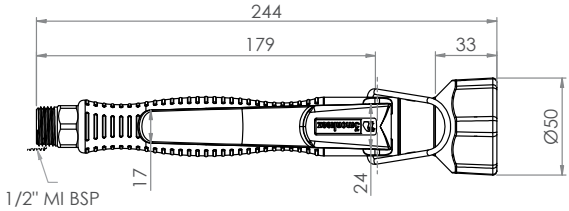


*Exclusions apply

# Accessories & Spare Parts

Lead Free AS 3718 23145

WATER RATING 8.0 litres per minute

100% STAINLESS STEEL LEAD FREE

GUARDIAN® TAPWARE

## Standard Spouts

10 YEAR WARRANTY

- Full S/S Construction
- 6", 8" or 12" Spout Available - 4 Star 7.5LPM

**T-3M3006-SO** - *6" Spout Only*
**T-3M3008-SO** - *8" Spout Only*
**T-3M3012-SO** - *12" Spout Only*




*6" Spout (152mm)*




*8" Spout (203mm)*




*12" Spout (305mm)*




T-3M006-SO

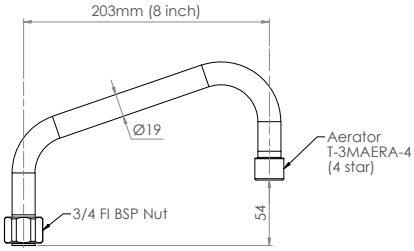


T-3M008-SO

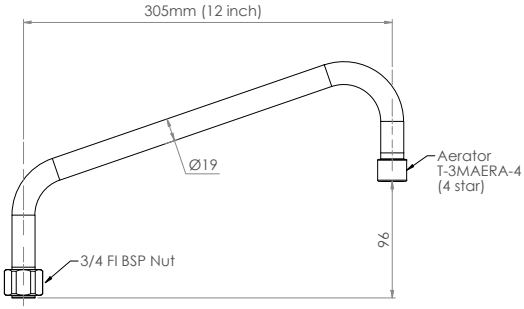


T-3M012-SO

**T-3M1514**

- 1x Food Grade Grease, 2x Pot Filler O Rings and 1x Pot Filler Circlip
- Suitable for: T-3M3006-SO, T-3M3008-SO, T-3M3012-SO, T-3M3007G-SO and T-3M3012G-SO



*Exclusions apply

3monkeez.com.au

# Accessories & Spare Parts

Lead Free AS 3718 23145

WATER RATING 7.5 litres per minute

100% STAINLESS STEEL LEAD FREE

GUARDIAN® TAPWARE


10 YEAR WARRANTY

## Gooseneck Spouts

- Full S/S Construction
- 7" or 12" Gooseneck Spout Available - 4 Star 7.5LPM

**T-3M3007G-SO** - *7" Gooseneck Spout Only*

**T-3M3012G-SO** - *12" Gooseneck Spout Only*

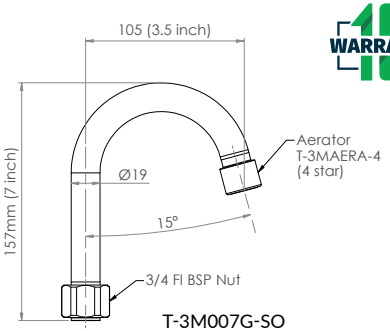



T-3M007G-SO



*7" (178MM) Gooseneck Spout*



*12" (305MM) Gooseneck Spout*

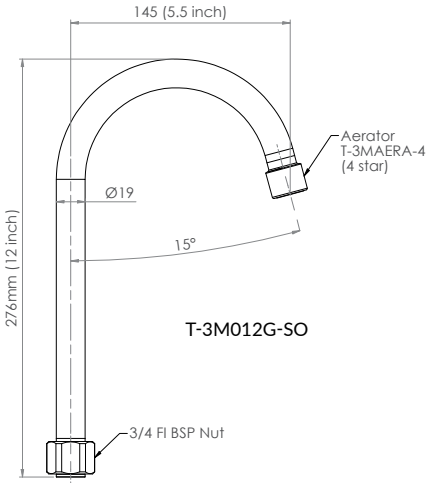


T-3M012G-SO

**T-3M1514**

- 1x Food Grade Grease, 2x Pot Filler O Rings and 1x Pot Filler Circlip
- Suitable for: T-3M3006-SO, T-3M3008-SO - 8", T-3M3012-SO, T-3M3007G-SO and T-3M3012G-SO



*Exclusions apply


3monkeez.com.au

## Cleaner Sink Spouts and Accessories

10 YEAR WARRANTY

### T-3MSS-CSSEW


- Fixed Standard Spout Only
- Suits: T-3MCSKIT-E08

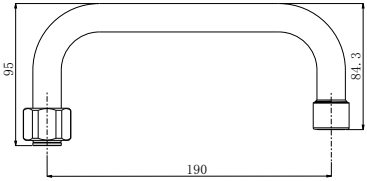


T-3MSS-CSSEW

### T-3MSS-CSSCW

- Fixed Straight Spout with Wall Mount
- Suits: T-3MCSKIT-C08

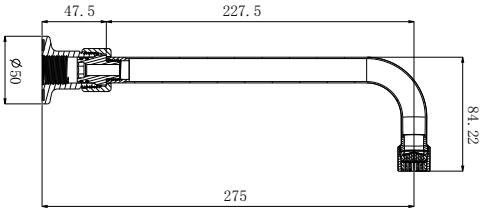


T-3MSS-CSSCW

### T-3MSS-CSTSB

- GUARDIAN- Cleaners Sink Tap Set Spout Bracket with Wall Mount Plate and Bucket Hook. 304 Grade S/S
- Suits: T-3MCSKIT-E08 and T-3MCSKIT-C08




T-3MSS-CSSEW



T-3MSS-CSSCW



T-3MSS-CSTSB

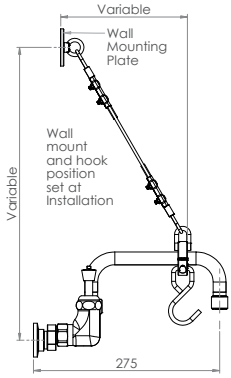


T-3MSS-CSTSB

*Exclusions apply

# Accessories & Spare Parts

100% STAINLESS STEEL LEAD FREE

GUARDIAN® TAPWARE

## Mixer Parts

10 YEAR WARRANTY

### T-3MSSP-BH

- Standard Handle Only for Mixers
- Suits: T-3MS4MIX, T-3MS6MIX, T-3MB4MIX and T-3MB6MIX



### T-3MSSP-LH

- Lever Handle Only for Mixers
- Suits: T-3MLB4MIX and T-3MLB6MIX T-3MLS4MIX and T-3MLS6MIX



### T-3MSSP-MIXCART

5 YEAR WARRANTY

- Cartridge and Nut for Mixers
- Suits: T-3MS4MIX, T-3MS6MIX, T-3MLB4MIX, T-3MLB6MIX, T-3MLS4MIX, T-3MLS6MIX, T-3MB4MIX and T-3MB6MIX



*Exclusions apply

3monkeez.com.au

# Accessories & Spare Parts

GUARDIAN® TAPWARE

## Top Assembly Parts

5 YEAR WARRANTY

### T-3M60200-CD-C

- COLD Cartridge
- Brass ¼ Turn Ceramic Disc
- Suits: T-3M60200, T-3M60210, T-3M60300 and T-3M60310



### T-3M60200-CD-H

- HOT Cartridge
- Ceramic Disc Cartridge
- Brass ¼ Turn Ceramic Disc
- Suits: T-3M60200, T-3M60210, T-3M60300 and T-3M60310



10 YEAR WARRANTY

### T-3MSSP-TAF50

- Pair 50mm Diameter Flange
- Suits: T-3M60210 and T-3M60310 Basin Top Assemblies



### T-3MSSP-TAF65

- Pair 65mm Diameter Flange
- Suits: T-3M60200 and T-3M60300 Wall Top Assemblies



*Exclusions apply

3monkeez.com.au

## Pillar and Bib Tap Spare Parts

10 YEAR WARRANTY



### T-3MSSP-BOPMLH

- Stainless Steel Lever Handle Only Suit Bib or Pillar Tap
- Includes Mechanical Operation Cartridge
- 304 Grade S/S

### T-3MSSP-BOP6LH

- Stainless Steel Lever Handle Only Suit Bib or Pillar Tap
- Includes 6 Second Timed Flow Cartridge
- 304 Grade S/S

### T-3MSSP-BOP18LH

- Stainless Steel Lever Handle Only Suit Bib or Pillar Tap
- Includes 18 Second Timed Flow Cartridge
- 304 Grade S/S

### T-3MSSP-BOPALH

- Stainless Steel Lever Handle Only Suit Bib or Pillar Tap
- Includes Adjustable Timed Flow Cartridge
- 304 Grade S/S



### T-3MSSP-BOPMPB

- GUARDIAN-Stainless Steel Push Button ONLY Suit Bib or Pillar Tap
- Includes Mechanical Operation Cartridge
- 304 Grade S/S

### T-3MSSP-BOP6PB

- Stainless Steel Push Button ONLY Suit Bib or Pillar Tap
- Includes 6 Second Timed Flow Cartridge
- 304 Grade S/S

### T-3MSSP-BOP18PB

- Stainless Steel Push Button ONLY Suit Bib or Pillar Tap
- Includes 18 Second Timed Flow Cartridge
- 304 Grade S/S

### T-3MSSP-BOPAPB

- GUARDIAN-Stainless Steel Push Button ONLY Suit Bib or Pillar Tap
- Includes Adjustable Timed Flow Cartridge
- 304 Grade S/S

*Exclusions apply

## Compact Bubbler Spare Parts

10 YEAR WARRANTY

### T-3MSSP-BOBCLH

- Compact Bubbler Lever Handle Only
- No Spindle (SBA)
- 304 Grade S/S



### T-3MSSP-BUBCLH

- Compact Bubbler Lever Handle Only
- Includes Spindle (SBA)
- 304 Grade S/S



### T-3MSSP-BOBCPB

- Compact Bubbler Push Button Only
- No Spindle (SBA)
- 304 Grade S/S



### T-3MSSP-BUBCPB

- Push Button Handle Only for Compact Bubblers
- Includes Spindle (SBA)
- 304 Grade S/S



*Exclusions apply

## Bubbler and Bottle Filler Spare Parts

10 YEAR WARRANTY

### T-3MSSP-BOBCH

- Stainless Steel Bubbler Cam Handle Only
- No Spindle (SBA)
- Suit Horizontal and 45 Degree Bubbler
- 304 Grade S/S



### T-3MSSP-BUBCH

- Cam Action Handle Only for Bubblers
- Includes Spindle (SBA)
- Suits Horizontal & 45 Degree Bubblers
- 304 Grade S/S



### T-3MSSP-BOBLH

- Stainless Steel Bubbler Lever Handle Only
- No Spindle (SBA)
- Suit Horizontal and 45 Degree Bubbler
- 304 Grade S/S



### T-3MSSP-BUBLH

- Lever Handle Only for Bubblers
- Includes Spindle (SBA)
- Suits Horizontal & 45 Degree Bubblers
- 304 Grade S/S



### T-3MSSP-BOBPB

- Stainless Steel Bubbler Push Button Only
- No Spindle (SBA)
- Suit Horizontal and 45 Degree Bubbler
- 304 Grade S/S



### T-3MSSP-BUBPB

- Push Button Handle Only for Bubblers
- Includes Spindle (SBA)
- Suits Horizontal & 45 Degree Bubblers
- 304 Grade S/S



*Exclusions apply

3monkeez.com.au

# Accessories & Spare Parts

100% STAINLESS STEEL LEAD FREE

GUARDIAN® TAPWARE

## Bubbler and Bottle Filler Spare Parts

5 YEAR WARRANTY

### T-3MSSP-BUBSBA



- Bubbler/Bottle Filler (SBA)
- 304 Grade S/S

### T-3MSSP-BFSG



- Bottle Filler Silicone Guard Only

### T-3MSSP-BOBMM



- Bubbler Metal Mouthguard Only
- Suit 45 Degree Bubbler
- 304 Grade S/S

### T-3MSSP-BOBSM



- Bubbler Silicone Mouthguard Only
- Suit Horizontal Bubbler
- Suits BUBS Items
- 304 Grade S/S

*Exclusions apply

3monkeez.com.au

## Timed 6 Second Sensor Conversion Kit with Bench Mount Sensor


10 YEAR WARRANTY 10 INCLUDING 2 YEAR ONSITE SUPPORT

**T-3MSSP-SCK-B** *(battery operated)*


**T-3MSSP-SCK-M** *(mains operated)*


- Timed 6 Second Sensor Conversion Kit for 3monkeez Bib Taps, Pillar Taps, Standard Bubblers and Bottle Filler.
- Kit Includes Bench Mount Sensor, Solenoid with Case, Tap Control Cap, Battery Pack or Transformer
- Battery Powered – 2x CR123 3V Lithium Batteries Estimates 80,000 Cycles

Top





Side

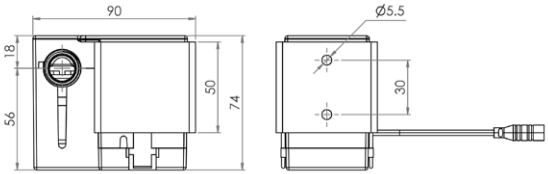














*Exclusions apply

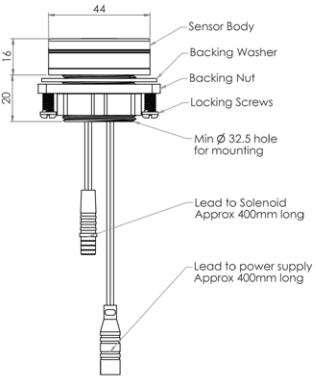3monkeez.com.au

## Timed 6 Second Sensor Conversion Kit with Wall Mount Sensor


10 YEAR WARRANTY
2 YEAR ONSITE SUPPORT

**T-3MSSP-SWCK-B** *(battery operated)*


**T-3MSSP-SWCK-M** *(mains operated)*

- Timed 6 Second Sensor Conversion Kit for 3monkeez Bib Taps, Pillar Taps, Standard Bubblers and Bottle Filler.
- Kit Includes Wall Mount Sensor, Solenoid with Case, Tap Control Cap, Battery Pack or Transformer
- Battery Powered – 2x CR123 3V Lithium Batteries Estimates 80,000 Cycles

Top





Side

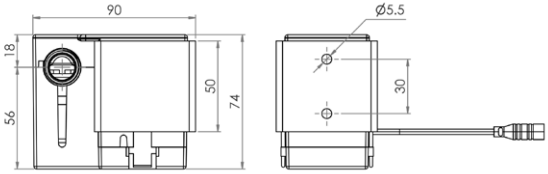



















*Exclusions apply

3monkeez.com.au

# Accessories & Spare Parts

100% STAINLESS STEEL LEAD FREE

GUARDIAN® TAPWARE

## Sensor Tapware Spare Parts

3 YEAR WARRANTY

### T-3MSSP-HMST-M

- Sensor Tap Transformer with 800mm Cable



T-3MSSP-HMST-M

### T-3MSSP-HMST-3M

- Sensor Tap Transformer with 3m Cable



T-3MSSP-HMST-3M

### T-3MSSP-HMST-BP

- Sensor Tap Battery Case and Batteries
- Battery Powered – 2x CR123 3V Lithium Batteries Estimates 80,000 Cycles



T-3MSSP-HMST-BP

### T-3MSSP-HMST-CBS

- Sensor Tap Solenoid and Case



T-3MSSP-HMST-CBS

### T-3MSSP-SEN6

- 6 Second Timed Flow Sensor Only for Bench or Boxed Splashback Installations

### T-3MSSP-SENW6

- 6 Second Timed Flow Sensor Only for Wall Installations




T-3MSSP-SENW6



T-3MSSP-SEN6

### T-3MSSP-SENEXT


- Pair Extension Cables to Suit Sensor Range - 2m Length



T-3MSSP-SENEXT

### T-3MSSP-BOSCAP

- 2x Caps with Indicators Suit Sensor Range



T-3MSSP-BOSCAP

*Exclusions apply





| | | | | | |
|---|---|---|---|---|---|
| NSW | 02 9627 6111 | WA | 08 6305 0681 | TAS | 03 6344 7060 |
| VIC | 03 9357 6562 | SA | 0417 731 718 | NT | 0447 382 658 |
| QLD | 07 3881 0322 | ACT | 0408 446 961 | FNQ | 07 4775 6956 |

3monkeez®

www.3monkeez.com.au

sales@3monkeez.com.au