



PRODUCT DOCUMENT PACK

Prepared and distributed by KW Commercial Kitchen

PRODUCT

Hoshizaki 91000001 IM-30CNE-25 Ice Maker – 18kg Clear Cube | Compact Fit-In

Model / SKU: 91000001

KW COMMERCIAL KITCHEN

7/72 Canterbury Road, Bankstown NSW 2200

Phone 1300 001 366

Email sales@kwcommercial.com.au

Web www.kwcommercial.com.au



Scan for the current KW product page

DOCUMENT NOTICE

The supplier document begins on the next page. KW contact branding is added in a separate footer area and does not replace the supplier's instructions, specifications or warranty terms.

Official supplier source: /media/products/21132/documents/hoshizaki-91000001-spec-sheet-3786f1ca7bd2__kw.pdf



HOSHIZAKI

IM-30CNE-25


Counter Fit-In Cube 18kg Ice Maker - Self Contained

Model Number
91000001

PRODUCT FEATURES

- New intelligent control circuit dedicated to saving power and water consumption.
- Inbuilt safety features - freeze cycle back up timer, defrost back up, low voltage & high amp protector.
- New 7 segment operational display panel for ease of use.
- Unique closed cell water circuit for ultimate contamination protection.
- Durable stainless-steel exterior.
- Easily accessible and cleanable air filters reduce costly callouts.
- Exceptionally hard crystal-clear cubes that melt slowly.
- Auto rinse and flush cycle.

TECHNICAL DRAWING

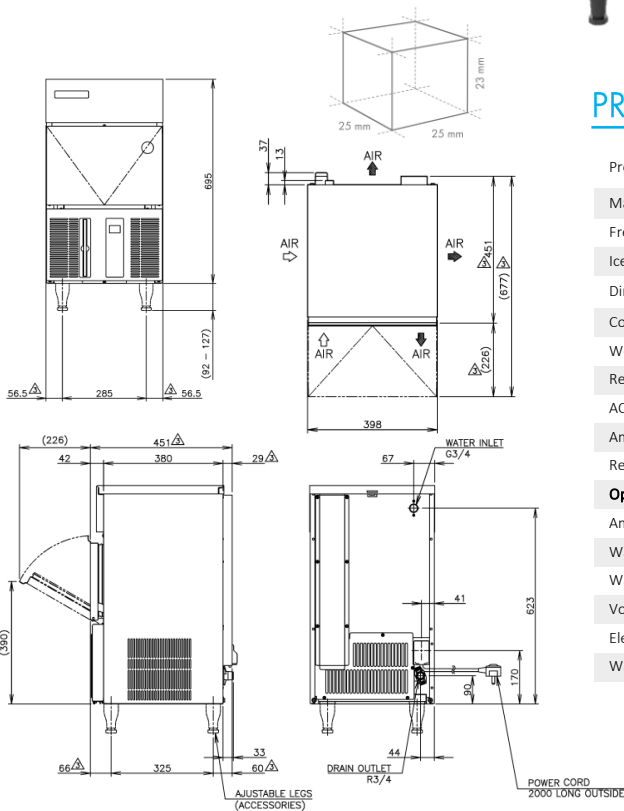

PRODUCT SPECIFICATION

Production Capacity / 24hrs	Approx. 18kg @ 21°C Air temp; 15°C Water Approx. 15kg @ 32°C Air temp; 21°C Water
Max Storage Capacity	Approx. 11.5kg (Bin Control Setting Approx. 6kg)
Freeze Cycle Time	Approx. 19 Min (At 21°C Air ; 15°C Water)
Ice Production / cycle	Approx. 0.27kg/21cps
Dimensions	398mm (W) x 451mm (D) x 787mm (H) (Includes 92mm-127mm Legs)
Cooling	Air
Weight Net/Gross (kg)	34/39
Refrigeration System	Forced Air Circulation
AC Supply Voltage	1 PHASE 220-240V 50Hz / 10amp Plug
Amperage	Running: 1.7A Rated: 1.7A Starting: 10A
Refrigerant Charge	R134a / 130g
Operating Conditions:	
Ambient Temp	1-40°C
Water Supply Temp	5-35°C
Water Supply Pressure	0.07-0.8MPa (0.7-8bar)
Voltage Range	±6%
Electrical consumption	Rated Motor: 270W (Power Factor: 66%)
Water Consumption / 24hrs	Approx. 0.7m³/d (At 21°C ; WT 15°C)



For free 6 month extended warranty, register online within 4 weeks of purchase date.
hoshizaki.com.au

Descriptions and specifications are subject to change at any time, without notice.
Illustrations for demonstration purposes. Copyright © 2023 Hoshizaki Lancer Pty Ltd. All right reserved.