



PRODUCT DOCUMENT PACK

Prepared and distributed by KW Commercial Kitchen

PRODUCT

Bromic 3736261-NR UC1250GDL-NR Upright Display Fridge 1266L – 2 Door

Model / SKU: 3736261-NR

KW COMMERCIAL KITCHEN

7/72 Canterbury Road, Bankstown NSW 2200

Phone 1300 001 366

Email sales@kwcommercial.com.au

Web www.kwcommercial.com.au



Scan for the current KW product page

DOCUMENT NOTICE

The supplier document begins on the next page. KW contact branding is added in a separate footer area and does not replace the supplier's instructions, specifications or warranty terms.

Official supplier source: /media/products/72149/documents/spec_sheet-1.pdf

Upright Display Fridge 1266L - 2 Door - Flat Glass

| Upright Display Fridge

High-impact LED lightbox to capture customer's attention

Food safe storage with 3M1 climate class

6 shelf tiers including base for display flexibility

5-star GEMS energy Rating

Self-closing doors ensure tight seal every time to minimise heat transfer

High-impact LED lights on the left and right side of the door.

Heated, Low-E double glazed glass for improved condensation performance

Fully compliant with Australian safety standards and regulations

38°C maximum ambient temperature for consistent cooling even in extreme heat




Lockable front castors for easy and secure positioning

Accurate temperature control with digital controller

Upright Display Fridge
1266L - 2 Door - Flat Glass

| Upright Display Fridge

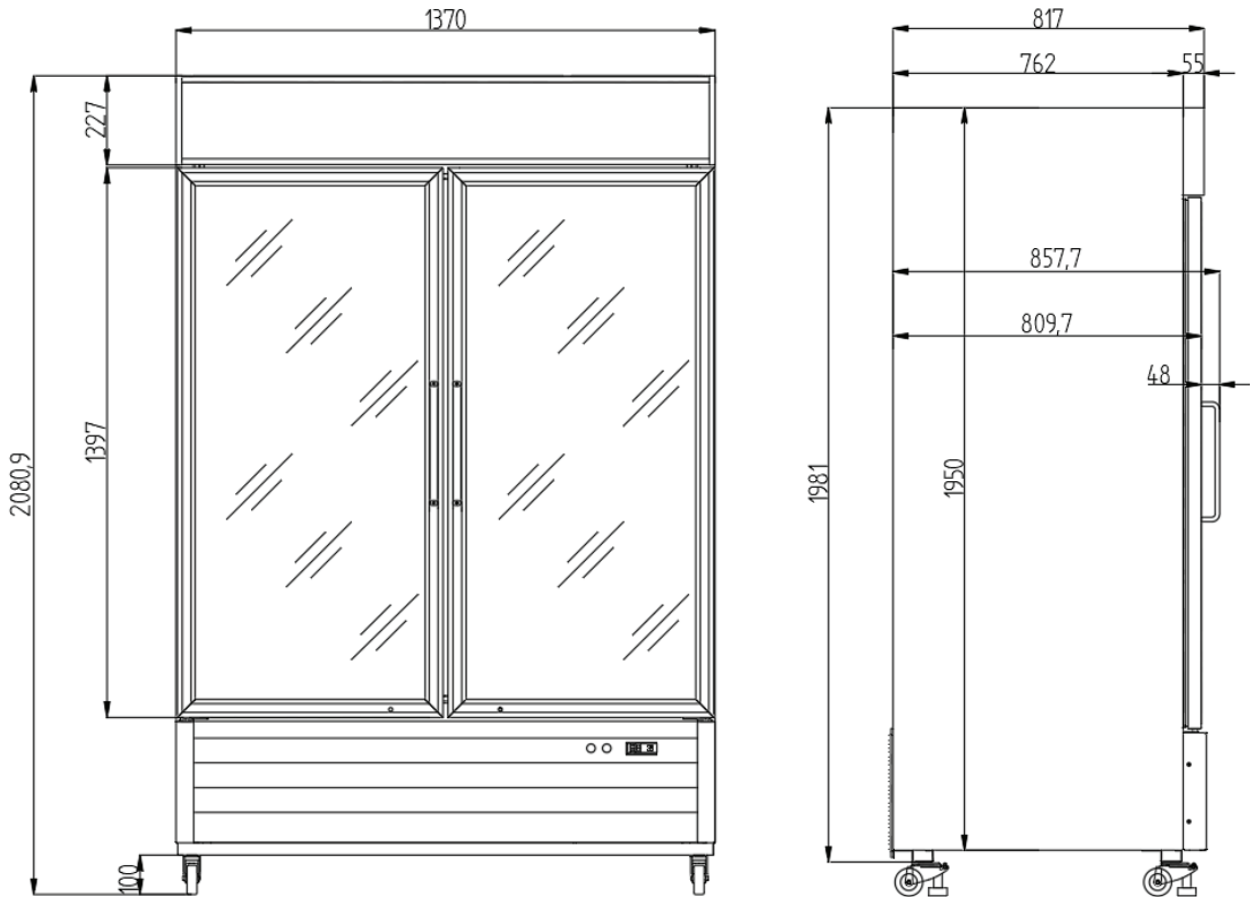

SPECIFICATIONS				DIMENSIONS	
Part Number	3736261-NR	Internal Light	LED	External (mm)	
Volume	1266L	Colour Temp.	6500K		
Unit Weight	232kg	No. of Doors	2		Width 1370
Packaged Weight	242kg	Door Type	Glass		Depth 865
Adjustable Temp. Range	1°C to 10°C	Door Glass Type	Double glazed Low-E Glass		Height 2081
Max. Ambient Temp. Range	38°C	Door Shape	Flat	Internal (mm)	
Climate Class	3M1	Door Style	Hinged		
GEMS Star Rating	5	Door Lock	Yes		Width 1254
Energy Consumption	7.65kWh/24h	Self-Closing Door	Yes		Depth 670
Refrigeration Capacity	616W	Door Swing Dimension	696mm		Height 1534
Refrigerant	R290	Total Depth of Door Open	1513mm	Packaged (mm)	
Air-Circulation	Fan Forced	No. of Shelf Tiers incl Base	6		
Rated Current	2.8A	Shelf Type	Adjust able		Width 1430
Electrical Voltage	240V	Shelf Dimensions	611(w) x 595(d) mm		Depth 898
Frequency	50Hz	Temp. Controller	Digital		Height 2132
Power Supply	Single Phase	Castors	Yes		
Power Plug	1 x 10A	Colour	Black		
Plug Location	Rear, bottom right	Warranty	5 Years Bromic Extra Care Warranty - Parts and Labour		
Cord Length	3m				