



PRODUCT DOCUMENT PACK

Prepared and distributed by KW Commercial Kitchen

PRODUCT

Giorik BG74XMT Bratt Pan

Model / SKU: BG74XMT

KW COMMERCIAL KITCHEN

7/72 Canterbury Road, Bankstown NSW 2200

Phone 1300 001 366

Email sales@kwcommercial.com.au

Web www.kwcommercial.com.au



Scan for the current KW product page

DOCUMENT NOTICE

The supplier document begins on the next page. KW contact branding is added in a separate footer area and does not replace the supplier's instructions, specifications or warranty terms.


Official supplier source: [/media/products/81924/documents/spec_sheet-1.pdf](/media/products/81924/documents/spec_sheet-1.pdf)



Product Information:

- Class leading, European style, professional quality and reliability since 1963
- 700 series, high performance gas bratt pan with 50 litre capacity and manual tilting pan (50 MJ/H)
- Duplex 2304 10mm thick stainless steel base for superior heat transfer, strength and corrosion resistance
- Piezo ignition tubular burners with flame failure device and pilot burner complete with HI-limit temperature protection
- Temperature regulation via thermostat (50°C - 300°C)
- Heating shut-off via micro-switch when the pan is tilted
- Water fill via integrated valve and spout
- Double skinned, counterbalanced lid with rear condensation channel
- Robust 304 grade stainless steel construction with rounded corners for improved cleaning
- Height adjustable stainless steel feet for a 900mm working height
- 24-month warranty

General Drawing:

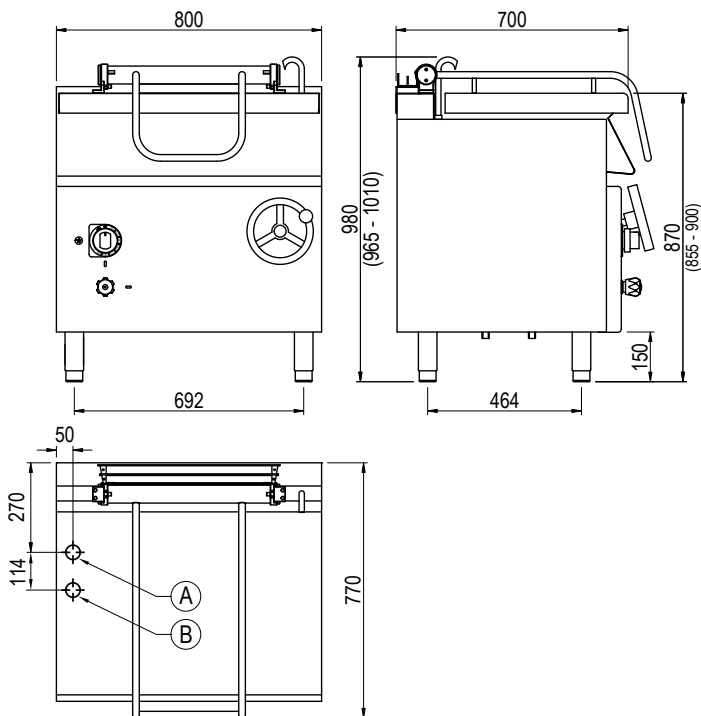

Specifications:

Model	BG74XMT	
W x D x H (mm)	800 x 770 x 980	
Weight	160kg	
Capacity	50L	
Cooking Area	726 x 400 x 130	
Packed Dimensions (mm)	845 x 825 x 1200	
Packed Weight (mm)	170kg	
	Natural	Universal LPG
Gas Connection	1/2" BSP	1/2" BSP
Minimum Normal Test Gas Pressure	1.3 kPa	2.75 kPa
Maximum Normal Test Gas Pressure	3.5 kPa	3.5 kPa
Nominal Test Point Pressure	1.0 kPa	2.65 kPa
Total Nominal Gas Consumption	50 MJ/H	50 MJ/H

Note: It is the responsibility of the installing gas plumber to ensure correct supply and connection sustaining appropriate pressure, when all installed gas appliances are operating at maximum.

Legend:

- A** Gas Connection
- B** Water Connection 1/2" BSP

Due to continuous product research and development, the information contained herein is subject to change without notice.

Revision: 02 - 08/04/2026 - A

www.stoddart.com.au

www.stoddart.co.nz

