



## PRODUCT DOCUMENT PACK

Prepared and distributed by KW Commercial Kitchen

### PRODUCT

# Giorik FLG941TCRXT Benchtop Frytop Griddle

**Model / SKU: FLG941TCRXT**

#### KW COMMERCIAL KITCHEN

7/72 Canterbury Road, Bankstown NSW 2200

Phone 1300 001 366

Email [sales@kwcommercial.com.au](mailto:sales@kwcommercial.com.au)

Web [www.kwcommercial.com.au](http://www.kwcommercial.com.au)



Scan for the current KW product page

### DOCUMENT NOTICE

The supplier document begins on the next page. KW contact branding is added in a separate footer area and does not replace the supplier's instructions, specifications or warranty terms.


Official supplier source: [/media/products/81941/documents/spec\\_sheet-1.pdf](/media/products/81941/documents/spec_sheet-1.pdf)



### Product Information:

- Class leading, European style, professional quality and reliability since 1963
- 900 series, gas frytop with 15mm smooth satin chrome plate (64.8 MJ/h) (also available in 15mm ribbed satin chrome plate)
- Satin chrome plate delivers a cost effective, highly durable, faster heating and easier cleaning solution than alternative plates
- Piezo ignition burners with flame failure device and pilot burner complete with Hi-limit temperature protection
- Temperature regulation via thermostat (90°C – 280°C)
- Robust 304 grade stainless steel construction with rounded corners for improved cleaning
- Hermetically sealed, pressed work surface with raised edges to protect from overflow
- Removable grease tray
- 24-month warranty

### General Drawing:

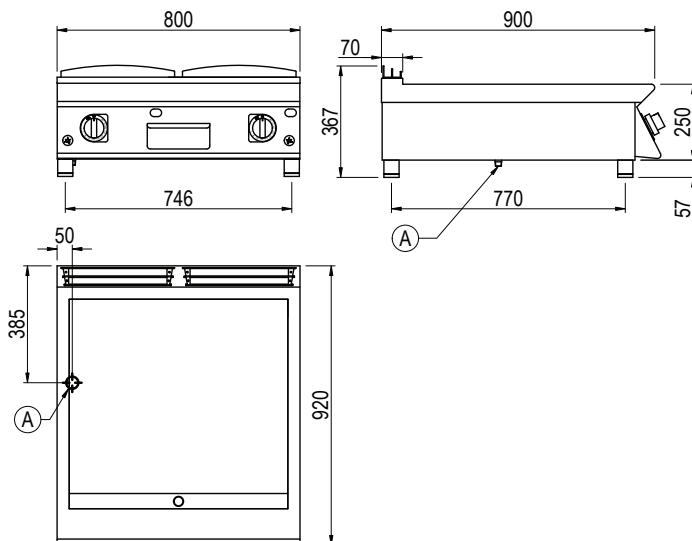

### Specifications:

|                                  |                  |               |
|----------------------------------|------------------|---------------|
| Model - Smooth                   | FLG941TCRXT      |               |
| Model - Ribbed                   | FRG941TCRXT      |               |
| W x D x H (mm)                   | 800 x 920 x 367  |               |
| Weight                           | 140kg            |               |
| Cooktop (mm)                     | 720 x 640        |               |
| Packed Dimensions (mm)           | 845 x 1025 x 570 |               |
| Packed Weight (mm)               | 152kg            |               |
|                                  | Natural          | Universal LPG |
| Gas Connection                   | 1/2" BSP         | 1/2" BSP      |
| Minimum Normal Test Gas Pressure | 1.3 kPa          | 2.75 kPa      |
| Maximum Normal Test Gas Pressure | 3.5 kPa          | 3.5 kPa       |
| Nominal Test Point Pressure      | 1.0 kPa          | 2.65 kPa      |
| Total Nominal Gas Consumption    | 64.8 MJ/h        | 64.8 MJ/h     |

**Note:** It is the responsibility of the installing gas plumber to ensure correct supply and connection sustaining appropriate pressure, when all installed gas appliances are operating at maximum.

### Legend:

A Gas Connection

Due to continuous product research and development, the information contained herein is subject to change without notice.

Revision: 01 - 05/01/2022 - A

[www.stoddart.com.au](http://www.stoddart.com.au)

[www.stoddart.co.nz](http://www.stoddart.co.nz)

